

hot water circulation system WZS 100

Part no. 68405

hot water circulation system

benefits

- dramatic energy savings in circulation mode compared to conventional circulation systems
- no mixing of the temperatures in the stratified storage tank
- thermally controlled hot water temperature (with scald protection)
- extremely low mounting effort and fast commissioning
- eligible for heating optimization program (BAFA)

Application

Circulation system for professional implementation of a service water circulation connection to an energy storage tank (hot water tank/stratified storage tank) which is operated at temperatures higher than 60 °C either permanently or temporarily. Also suitable for stratified hygienic storage and bivalent service water tanks. If used with older existing systems (for example, hot water tanks with wood, solar, gas, heat pump or oil-fired burner), controlled circulation to meet actual demands results in high energy savings. The hot water circulation system is optimally suited for use with renewable energies in domestic technology applications, primarily in single and two family homes.

Description

Compact, pre-assembled and tightness-tested hot water circulation system in form-fit heat insulation part, consisting of thermal mixing valve with integrated scald protection, circulation pump with all necessary functional components such as shut-off valves, variable safety group assembly, backflow preventer and connection parts as per DIN 1988.

The hydraulic separation of the flow paths ensures correct operation of the circulation pump since it has to overcome only one backflow preventer in any operating condition and thus avoids mixing of the cold water inlet in the circulation path.

Technical Specifications

system connections

G $\frac{3}{4}$ female

Connection lance / bypass

G $\frac{1}{2}$ female

Operating temperature range

Medium: max. 95 °C

Mixing temperature

35/60 °C

System pressure

max. 10 bar

Flow coefficient Kvs

1.6 m³/h

Housing

Brass

Safety valve

opening pressure: 6 bar

Insulation

Polypropylene EPP

Dimensions

W x H x D: 320 x 300 x 146 mm

circulation pump


Wilo-Star-Z NOVA

Degree of protection
IP 42 (EN 60529)

Power input
2 – 4.5 W

Supply voltage
AC 230 V, 50 Hz

Technical Drawings

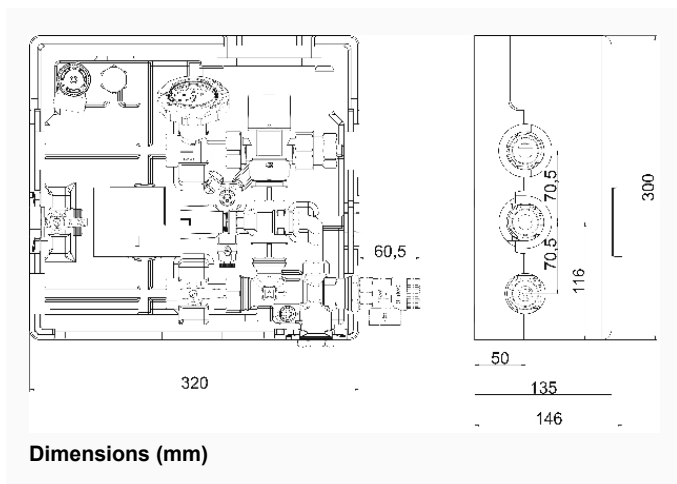

Versions

Part no.

hot water circulation system WZS 100	●	68405
---	---	-------

- in-stock items
- Non-stock items