PASQB80 · PASQB60



WATER PUMPS

### **APPLICATION**

- Clean water without abrasive particles
  / non-aggressive liquid
- Domestic use
- In particular for delivering water in combination with small pressure sets for irrigation
- Installed in enclosed places, or at least protected against inclement weather
- 25 mm Inlet & outlet

#### **OPERATING CONDITIONS**

- Suction lift up to 6 m
- Liquid temperature up to +40°C
- Ambient temperature up to +40°C
- Max. working pressure: 6 bar

#### **MOTOR**

- 2-Pole induction motor
- Single-phase 50 Hz
- Insulation Class B
- Protection IP44
- With capacitor and thermal overload protection

#### **MATERIALS**

- Pump body - Cast iron

- Motor support - Aluminium

- Impeller - Brass


- Motor shaft - Stainless Steel

- Mechanical seal - Ceramic/Graphite

- 100% Copper winding

|   |                   | QB60          | QB80          |  |
|---|-------------------|---------------|---------------|--|
|   | PRESSURE<br>(bar) | FLOW<br>(୧/h) | FLOW<br>(୧/h) |  |
|   | 0.6               | 1750          | 3380          |  |
|   | 1.5               | 1140          | 3030          |  |
|   | 2.2               | 760           | 2470          |  |
|   | 2.8               | 350           | 2010          |  |
| _ | 3.6               | 0             | 1410          |  |
|   | 4.0               | 00            | 1050          |  |
|   | 4.6               | 550           | 550           |  |
|   | 5.2               | 0             | 0             |  |



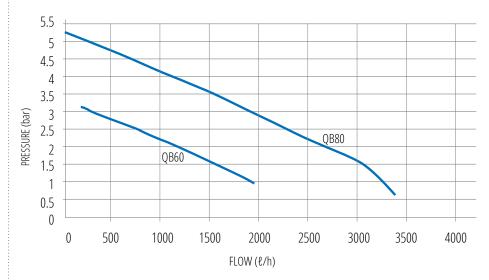

| TYPE    | POWER (W) | VOLTAGE (V) | INLET | OUTLET | MAX FLOW (m³/h) | MAX HEAD (m) |
|---------|-----------|-------------|-------|--------|-----------------|--------------|
| PASQB80 | 750       | 230         | 1"    | 1"     | 3               | 60           |
| PASQB60 | 370       | 230         | 1"    | 1"     | 1,6             | 33           |

# SELF PRIMING PERIPHERAL PUMP WITH FLOW CONTROL

PASQBSK · PASQB60SK

PASCALI self priming PERIPHERAL pump with flow control. For domestic and garden irrigation use. Thermal overload protection, 100% copper winding and brass impeller. 25 mm Inlet & outlet.



FLOW SWITCH PASSK10

Max 10 Amps.

Complete with PASSK10

Non-return valve included.

## SELF PRIMING PERIPHERAL PUMP WITH PRESSURE CONTROL

PASQB/24

PASCALI self priming PERIPHERAL pump with 24 & pressure control system. For domestic and garden irrigation use. Thermal overload protection, 100% copper winding and brass impeller. 25 mm Inlet & outlet.

Complete with PAS24L PASSWAY PASFLEXHOSE-2 PASY4010BAR PASSK-2A



Non-return valve included.



NRCS HOUSEHOLD APPLIANCES\ELECTRONIC LETTER OF AUTHORITY

APPLICANT NAME:

HINTERLAND SA

TRADING NAME :

**AGRINET** 

POSTAL ADDRESS:

PRIVATE BAG X165

CENTURION

PHYSICAL ADDRESS:

111 STERLING STREET

KOSMOSDAL SAMAND

0157

CONTACT PERSON/S: FELICIA MNATA

TEL NO:

012 6572000 086 529 4479

FAX NO: E-MAIL:

morney@agrinet.co.za

CUSTOMS IMPORTER CODE:

CHECKED

VAT REGISTRATION NO:

CHECKED

COMPANY REGISTRATION NO:

CHECKED

TARIFF HEADING:

8413.81

REBATE CODE:

| DESCRIPTION             | BRAND   | COUNTRY OF ORIGIN | APPLICABLE STANDARD |  |
|-------------------------|---------|-------------------|---------------------|--|
| PASCALI PERIPHERAL PUMP | PASCALI | CHINA             | SANS IEC 60335-2-41 |  |

MODEL#

PASQB80

**ACCEPTED VARIATIONS** 

PASQB24

**PASQBSK** 

where ! = Blank

\$ = Alpha

# = Numeric

@ = Alphanumeric

\* = Blank or Alphanumeric

CERTIFICATE NO:

000000172835/001

EXPIRY DATE: 24 Jan 2025

DATE OF ISSUE:

20 Jan 2022

AUTHORIZING OFFICER:

Stephina Teffo

DATABASE ENTRY NO:

172835

AUTHORIZED :

This certificate is issued subject to the conditions attached overleaf

**Head Office** 

SBS Campus 1 Dr Lategan Road Groenkloof Pretoria

NRCS Private Bag X25, Brooklyn Square 0075

J Tel: +27 12 482 8700 • Hotline 0800 214 719 • Fax: +27 86 404 7431

Web: www.nrcs.org.za