




## Features

- Available in 3/4" BSP/NPT Male/Female Thread Connection
- Body, Arm, Bearing & Nozzles made of engineering plastic (Delrin) for durability
- Non clog stream straightener in range nozzle ensures excellent performance in wind condition
- Specially designed Bayonet nozzles
- Stainless Steel Springs & Pivot Pin
- Trajectory Angle 23°

## Performance Graph

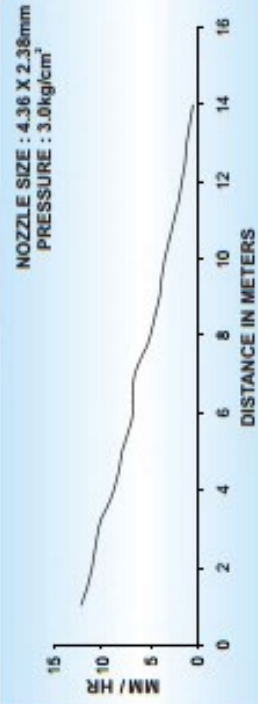

## Performance Data

Nozzle (mm)	Pressure (kg/cm <sup>2</sup> )	Radius (mtr)	Discharge (ltr/min)	Discharge (m <sup>3</sup> /hr)
3.57xPlug Blue	1.00	09.00	9.70	0.58
	2.00	09.60	11.80	0.71
	3.00	10.50	14.50	0.87
	4.00	11.20	16.70	1.00
3.96x2.38 Green	1.00	09.75	13.20	0.79
	2.00	11.25	18.50	1.11
	3.00	12.75	22.40	1.34
	4.00	14.40	26.50	1.59
4.4.36x2.38 Grey	1.00	10.50	17.00	1.02
	2.00	13.40	22.00	1.32
	3.00	14.92	25.70	1.54
	4.00	16.15	30.40	1.82
4.76x3.17 Yellow	1.00	11.00	21.00	1.26
	2.00	14.00	28.00	1.68
	3.00	15.57	36.00	2.16
	4.00	16.76	42.00	2.52
5.15x3.17 Black	1.00	11.75	27.50	1.65
	2.00	14.35	32.00	1.65
	3.00	16.00	40.00	2.40
	4.00	17.07	47.00	2.82
5.55x3.17 Red	1.00	12.60	32.70	1.96
	2.00	14.80	37.30	2.24
	3.00	16.50	45.50	2.73
	4.00	17.50	52.40	3.14

\* Performance is based on ideal conditions of Temperature, Wind Velocity and Humidity.  
 † Standard Nozzle Size