




Fully Supported
Tapered Transition.

Exterior Baffle
Design Prevents
Debris Build-Up.


Low Profile Blends
into Roof.

Your Multi-Purpose Exhaust Vent Solution.


EXHAUST INSTALLATION APPLICATIONS:

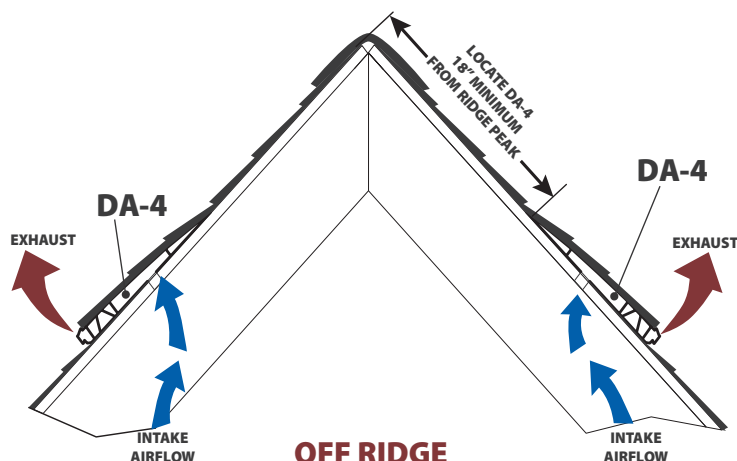

OFF RIDGE

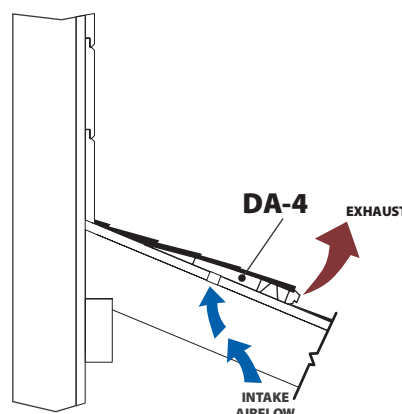

ROOF MEETS WALL

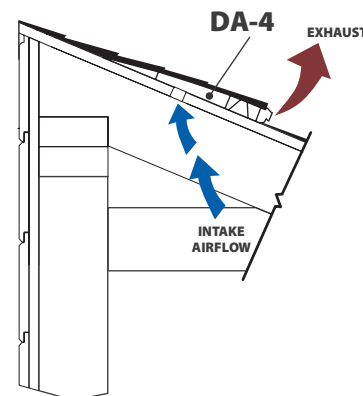

SINGLE SLOPE

DA-4 FEATURES:

- ▶ 2½" ring shank nails included.
- ▶ Made from the same durable, long lasting and field tested material as the Lomanco Omni Series vents.
- ▶ Fits roof pitches 3/12 to 16/12.
- ▶ Unique design provides enhanced weather protection.
- ▶ Integrated end plug every 2 inches.
- ▶ 9 square inches of Net Free Area per linear foot.
- ▶ Molded nail lines.
- ▶ Slot width guidelines.
- ▶ Patented design.
- ▶ The DA-4 can be used as an intake vent (see reverse).
- ▶ **Lifetime Limited Warranty.**

Model	Length (ft.)	NFA (in. ²)	Roof Pitch	Packaged
DA-4	4'	36	3/12 to 16/12	10 Per Box

Molded-in Cut
Lines for Tapered
Transitions.

Engineered
Material
Guarantees
Longevity.

10 Supported
Nail Holes.

Shingle Stop
Alignment Tabs.

MADE IN USA



CSA
Approved



Texas Department of
Insurance "Windstorm"
Approved

MIAMI-DADE COUNTY
APPROVED

Lomanco recommends balancing the intake ventilation system to the chosen exhaust ventilation system, a balanced system consists of 50% intake ventilation and 50% exhaust ventilation.

Lomanco ventilation calculations are based on the IRC/FHA standard of one square foot of ventilation for every 300 square feet of attic floor space. For ventilation calculators and additional information, visit our website, lomanco.com.

LO459_1214



lomanco



lomancovents



Fully Supported
Tapered Transition.

Off Roof Edge Installation

Roof Deck Installed Intake Ventilation Made for Roofers.

Molded-in Cut
Lines for Tapered
Transitions.

Engineered
Material
Guarantees
Longevity.

10 Supported
Nail Holes.

Shingle Stop
Alignment Tabs.



Low Profile
Blends into
Roof Profile.



Exterior Baffle
Design Prevents
Debris Build-up.

Roof Edge Installation

DA-4 FEATURES:

- ▶ 2½" ring shank nails included.
- ▶ Made from the same durable, long lasting and field tested material as the Lomanco Omni Series vents.
- ▶ Fits roof pitches 3/12 to 16/12.
- ▶ Unique design provides enhanced weather protection.
- ▶ Integrated end plug every 2 inches.
- ▶ 9 square inches of Net Free Area per linear foot.
- ▶ Molded nail lines.
- ▶ Intake slot width guidelines.
- ▶ Patented design.
- ▶ The DA-4 can be used as an exhaust vent (see reverse).
- ▶ **Lifetime Limited Warranty.**

Model	Length (ft.)	NFA (in. ²)	Roof Pitch	Packaged
DA-4	4'	36	3/12 to 16/12	10 Per Box



**Want more info?
Scan this QR
code with your
smartphone.**

Lomanco recommends balancing the intake ventilation system to the chosen exhaust ventilation system, a balanced system consists of 50% intake ventilation and 50% exhaust ventilation.

Lomanco ventilation calculations are based on the IRC/FHA standard of one square foot of ventilation for every 300 square feet of attic floor space. For ventilation calculators and additional information, visit our website, lomanco.com.