


LOMANCO® Lo-OmniRoll® VENTS

The Rollable, Gunnable and Functional Ridge Vent.

Use with Lomanco intake vents for a complete
ROOF VENTILATION SYSTEM!

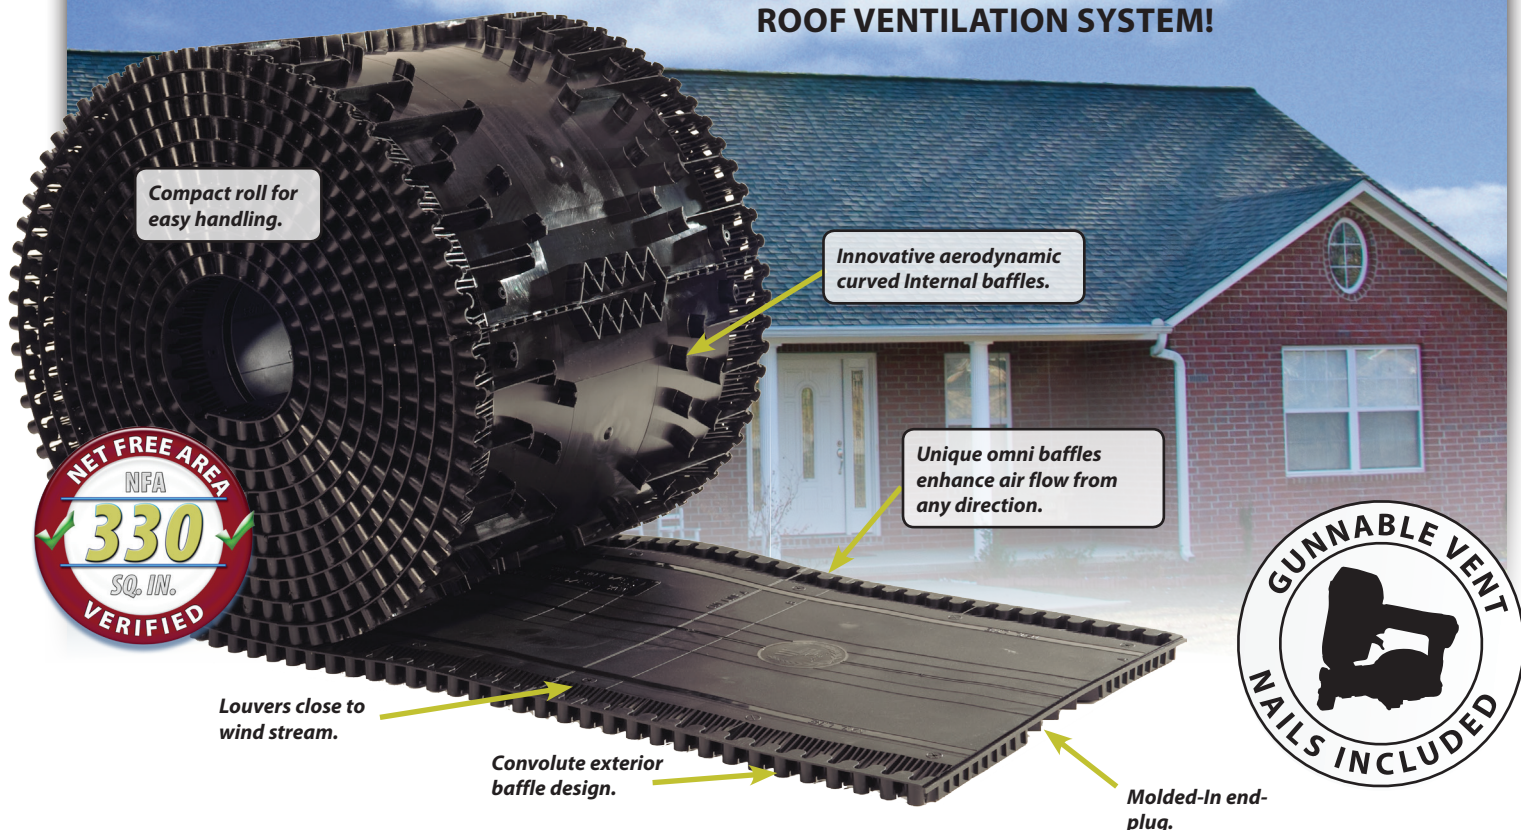

LOR-30 FEATURES:

- ▶ Pneumatic nail gun or hammer installed.
- ▶ Two coils of 1¾" nails provided.
- ▶ Patented design brings you the truly functional roll out.
- ▶ Compact 30 foot roll is easy to handle.
- ▶ Superior weather protection and performance with no filter to clog.
- ▶ Exterior convolute baffles - incurved design allows flexibility to roll up and out while maintaining its shape.
- ▶ Can be cut at one foot intervals - multiple cut lines eliminates unnecessary scrap.
- ▶ Patented molded fanfold end plugs - no accessories or alterations needed.
- ▶ Molded centerline for fast and easy alignment.
- ▶ Field tested design - proven effective under all weather conditions.
- ▶ The air flow acceleration design - maximizes ventilation capacity.
- ▶ Omni baffles signify air flow from any direction.
- ▶ Nail holes marked every 6 inches - supported every foot - will not crush down.
- ▶ Full 11 square inches of net free area per linear foot.
- ▶ Engineered material guarantees longevity.
- ▶ **Lifetime Limited Warranty.**



**Want more info?
Scan this QR
code with your
smartphone.**

LOR-30 Ventilation Guide

(Attic floor space) in square feet

Area Ventilated	1000	1500	2000	2500	3000	3500
Required length(ft.)	22'	33'	44'	55'	66'	77'
Intake Required(in ²)	242	363	484	605	726	847

Based on the IRC/FHA standard of one square foot of ventilation for every 300 square feet of attic floor space.

Model	Length (ft.)	NFA (in. ²)	Roof Pitch
LOR-30	30'	330	2/12 To 16/12

CFM at Wind Velocity of

3 MPH	8 MPH	15 MPH
52	148	283

Above CFM are per 4-Ft. Sections

MADE IN USA

LO448_1214

Lomanco, Inc. • lomanco.com • 1.800.643.5596



[lomanco](http://lomanco.com)



[lomancovents](http://lomancovents.com)