


LUXURY ACRYLIC SERIES

SUBMITTAL DATA

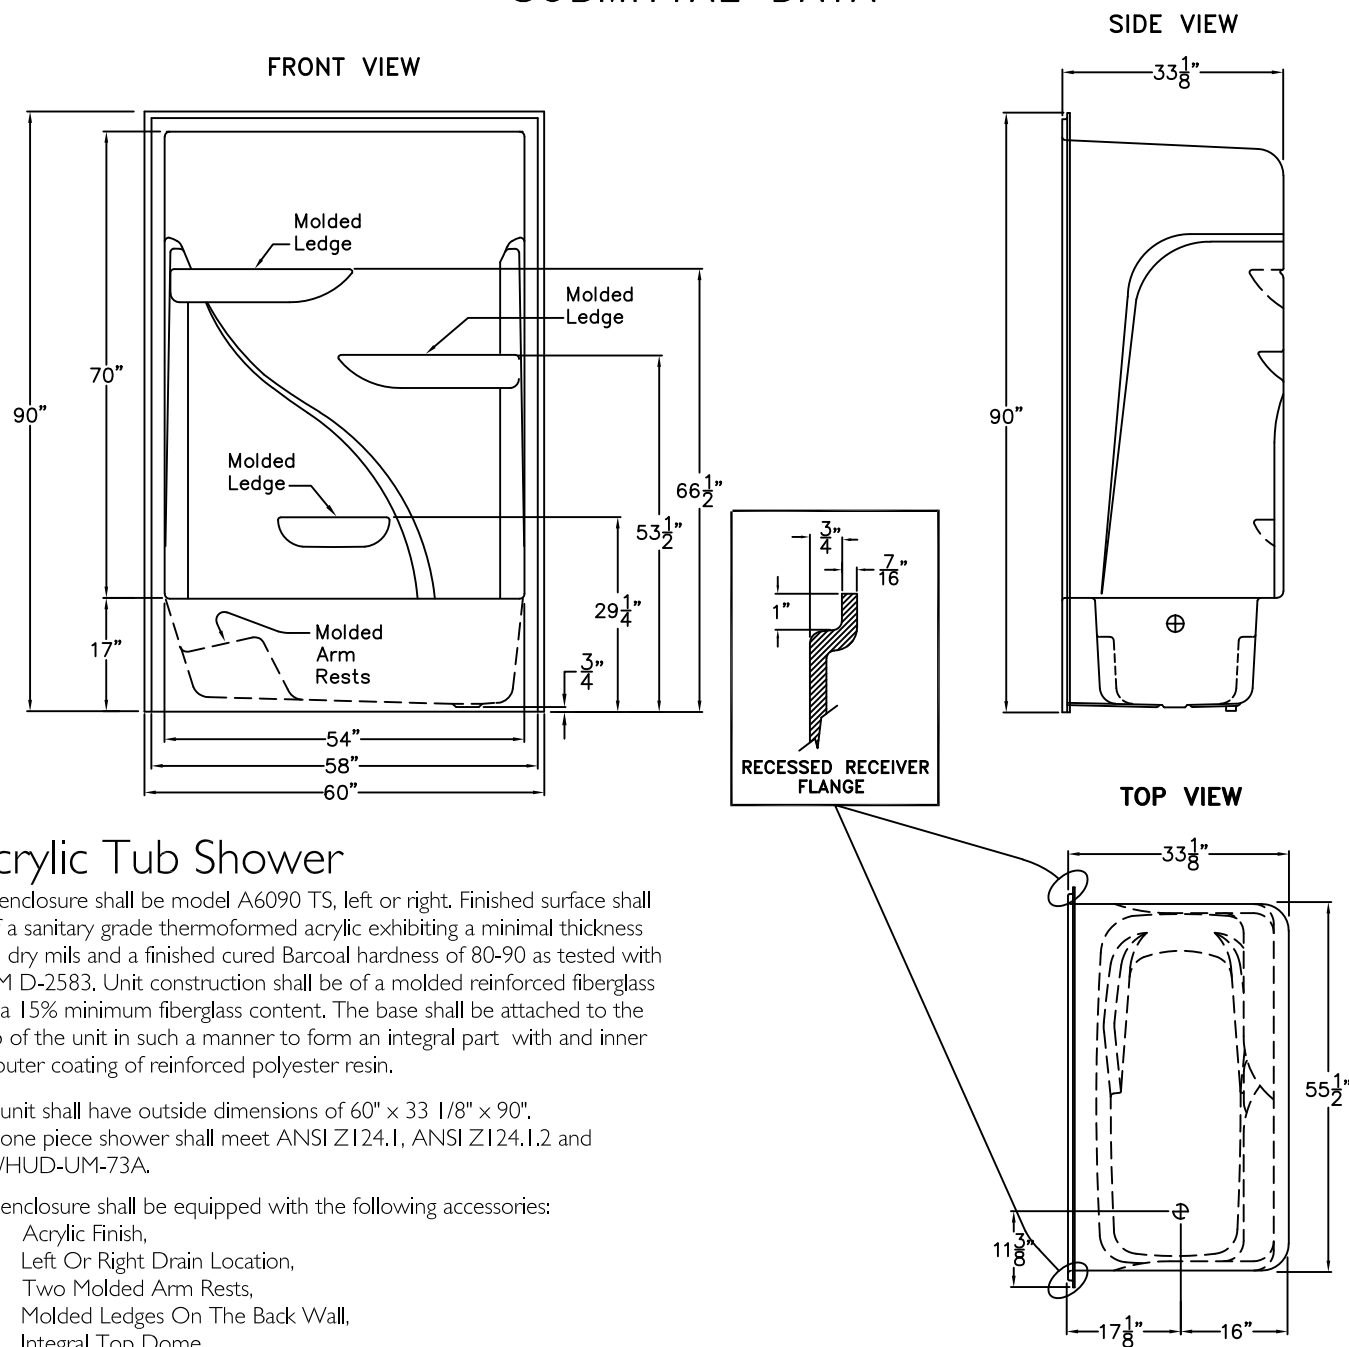

Acrylic Tub Shower

This enclosure shall be model A6090 TS, left or right. Finished surface shall be of a sanitary grade thermoformed acrylic exhibiting a minimal thickness of 15 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content. The base shall be attached to the sump of the unit in such a manner to form an integral part with an inner and outer coating of reinforced polyester resin.

The unit shall have outside dimensions of 60" x 33 1/8" x 90".

The one piece shower shall meet ANSI Z124.1, ANSI Z124.1.2 and FHA/HUD-UM-73A.

The enclosure shall be equipped with the following accessories:

1. Acrylic Finish,
2. Left Or Right Drain Location,
3. Two Molded Arm Rests,
4. Molded Ledges On The Back Wall,
5. Integral Top Dome,
6. Recessed Receiver Flanges On Sides And Across The Top,
7. 17" Apron/Skirt,
8. Slip Resistant Bottom.

DUE TO THE NATURE OF THE MATERIALS
DIMENSIONS MAY VARY ± 1/2"

Job Name:

PRAXIS

Approved By Print Name:

Drawing#: A6090 TS

Approved By Signature:

Date Approved:

Date: 1-16-14

Revised: 4-6-20

Rep.:

Wholesaler:

Quote No.:

PRAXIS INDUSTRIES, LLC.
435 INDUSTRIAL ROAD, SAVANNAH, TN 38372
1 (800) 443-7269 - FAX (731) 925-4290