


Engineering Specifications:

Plastic chrome plated, self cleaning shower head with brass chrome plated ball joint connector, 2.5 gpm flowrate maximum with non-removable pressure compensating flow control, 1/2" NPT female threaded inlet, and outer ring spray adjustment for coarse or soft massage spray.

Flow Rate*

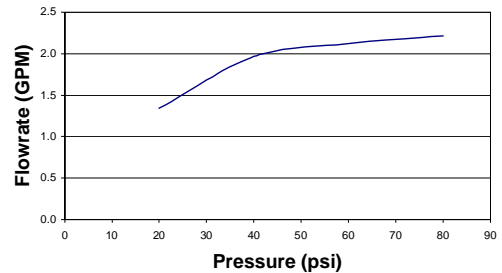

* Actual flow rate may vary due to system and installation conditions.

Note: All dimensions are for reference only. Do not use for pre-plumbing.

OPTIONAL ACCESSORIES

Suffix	Description
NA	

STANDARDS

Tested to meet the following standards:
ASME A112.18.1/CSAB125.1

TEMP-GARD STANDARD 2.5 GPM SHOWER HEAD

Clarion
BATHWARE
44 Amsler Ave.
Shippenville, PA 16254

Phone: (814) 226-5374
Toll Free: (800) 576-9228
Fax: (814) 226-0730
www.clarionbathware.com

Mold Fabrication will not begin until approved drawing is received.
Standard mold production is (_____) weeks unless quoted otherwise.

Signatures For Approval: _____ Date: _____
Customer: _____
Clarion Engineer: _____
Clarion SVP of Sales: _____

DWG. #
Fixed Shower
Head

Dwg. By: NMH
Date: 5/7/2020