


# PIVOT SHOWER DOOR

## Flex

### SHDR-22607200-XX

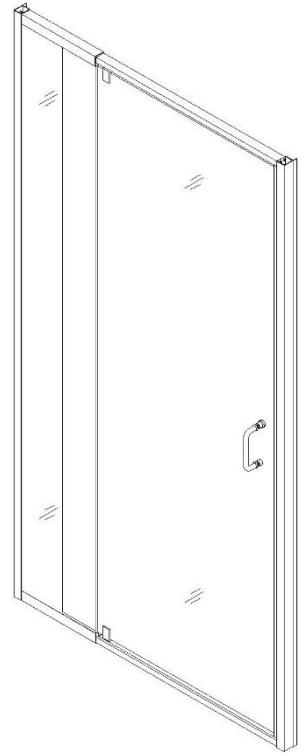

### Features

- *Frameless glass design*
- *1/4" (6mm) thick clear tempered glass in clear or fingerprint-free frosted band*
- *Up to 4" adjustment:*  
*1" in wall profile for out-of-plumb or overall width on stationary panel side*  
*3" in expandable rails for width*
- *Chrome, Brushed Nickel hardware finish*
- *Anodized Aluminum wall profile*
- *Reversible for right or left door opening*
- *Pivot door hardware*

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- *ANSI Z97. 1 (tempered glass)*
- *16 CFR Part 1201*

### Specified Model

Model	Description	Application	Glass Thickness	Frame Finishes/Colors
SHDR-22607200-01	Pivot Shower Door	Shower	1/4"(6mm)	Chrome
SHDR-22607200-04	Pivot Shower Door	Shower	1/4"(6mm)	Brushed Nickel

### Product Specification

- 1/4"(6mm) thick clear tempered glass
- 56"(1422mm) to 60"(1524mm) finished wall opening
- 72"(1829mm) height
- **1-3/8" (35mm) min threshold requirement.**

## INSTALLATION NOTES


Install this product according to the installation manual.

**\*Please note that you should consult your local building codes with questions on installation compliance standards. Building and plumbing codes may vary by location, and DreamLine® is not responsible for code compliance standards for your project and will not accept any returns.\***

## GENERAL NOTICE

- The installation surface to be leveled and rigid prior unit' assembly
- The wall structure to be plumbed and be able to support total unit' weight
- This model requires a minimum 1 3/8" of flat threshold space for installation
- The irregular installation, surface level or out of square condition can result in serious problems in your installation.

A (Min-Max)	B (Height)	C (Walk-In)	D (Width)
56"(1422mm)-60"(1524mm)	72"(1829mm)	23"(584mm)	1 3/8"(35mm)

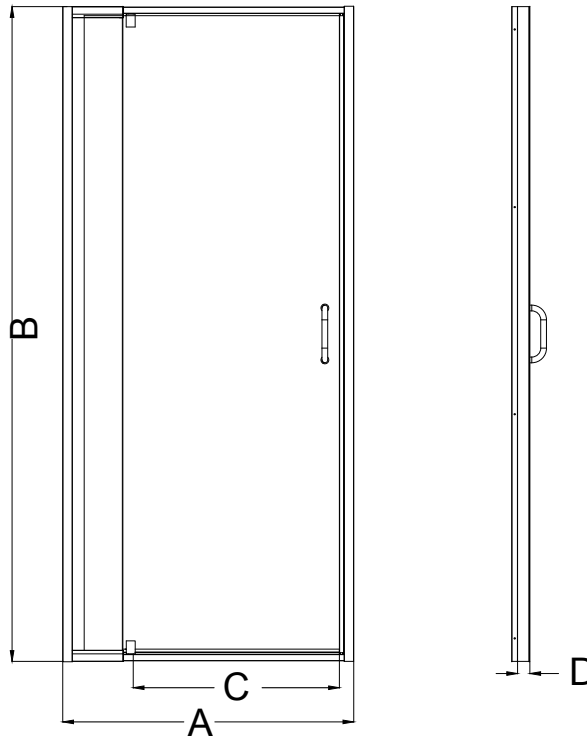

FRONT ELEVATION

PRODUCT DIAGRAM

SIDE ELEVATION

*"The Flex shower door (the "Product") is suitable for commercial installation and comes backed by the Dreamline's standard one (1) year commercial warranty under which Dreamline will repair or replace any defective Product during the warranty period. For commercial customers, we strongly recommend the use of Dreamline's Onsite Contractor Support option. Dreamline's commercial warranty does not apply to damage or losses resulting from (i) other than normal and proper use and normal service conditions; (ii) improper installation, (iii) installation in or upon an unsuitable surface or areas; (iv) abuse, (v) accident, (vi) alteration, (vii) misuse, (viii) neglect, (ix) unauthorized repair or the failure to utilize suitably qualified and trained persons to perform service and/or repair of the Product, (x) improper maintenance, (xi) failure to follow installation, operating, cleaning or maintenance instructions, and (xii) use of "non-authorized" parts. "*