


HINGED SHOWER DOOR

Unidoor Plus

SHDR-246007210-XX

Features

- Frameless glass design
- 3/8" (10mm) thick clear tempered glass
- 1/2" adjustment for out-of-plumb or overall width on Stationary panel side
- Chrome, Brushed Nickel, Oil Rubbed Bronze and Black Satin hardware finish
- Anodized aluminum U-channel profile for stationary panel(s) installation
- Reversible for right or left door opening
- Solid brass wall-mount, self-closing hinges

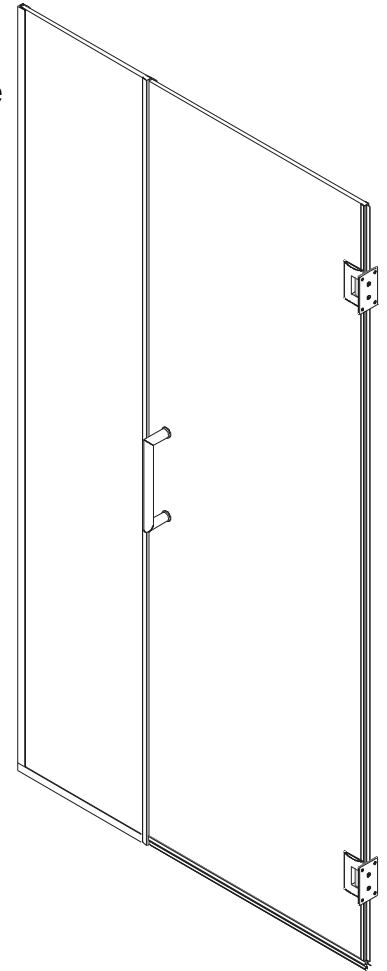

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z97.1 (tempered glass)
- 16 CFR Part1201

Specified Model

Model	Description	Application	Glass Thickness	Frame Finishes/Colors
SHDR-246007210-01	Hinged shower door	Shower	3/8" (10mm)	Chrome
SHDR-246007210-04	Hinged shower door	Shower	3/8" (10mm)	Brushed Nickel
SHDR-246007210-06	Hinged shower door	Shower	3/8" (10mm)	Oil Rubbed Bronze
SHDR-246007210-09	Hinged shower door	Shower	3/8" (10mm)	Black Satin

Product Specification

- 3/8"(10mm) thick clear tempered glass
- 60"(1524mm) to 60 1/2"(1537mm) finished wall opening
- 72"(1829mm) height
- **5/8" (16mm) min threshold requirement**


Installation Notes

Follow all product recommendations and requirements as demonstrated in the model's installation manual. Refer to the model's web page on DreamLine.com for the latest technical drawings, installation manuals, warranty information and/or additional product information.

***Refer to your local building codes with any questions on installation compliance standards. Building and plumbing codes may vary by location, and DreamLine® is not responsible for code compliance standards for your project and will not accept any returns. Use a competent and licensed (if required by local code) plumber for any required plumbing installation.**

NOTICE: Prior to installation, ensure all intended finished surfaces are level, solid, and able to support the total weight of the unit. Also, ensure all intended installation walls are at right (90°) angles. Irregular installation surface levels, radius corners or improper angle(s) of side walls may result in serious problems for your installation. Note that some adjustment and drilling may be necessary during the installation process. This unit must be installed upon a finished threshold and against finished walls. DreamLine® shower doors are not designed to be installed into a fiberglass surround due to the radius corners and lack of solid surface material to safely and properly mount the hardware.

A (Min-Max)	B (Height)	C (Walk - In)	D (Width)
60"(1524mm) - 60 1/2"(1537mm)	72"(1829mm)	29" (737mm)	9/16" (14mm)

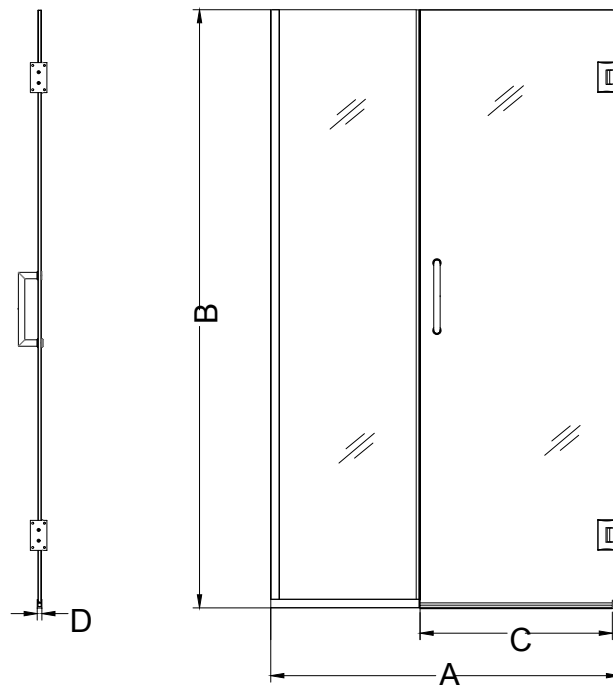

SIDE ELEVATION

FRONT ELEVATION

Product Diagram

"The UnidoorPlus shower door (the "Product") is suitable for commercial installation and comes backed by the Dreamline's standard one (1) year commercial warranty under which Dreamline will repair or replace any defective Product during the warranty period. For commercial customers, we strongly recommend the use of Dreamline's Onsite Contractor Support option. Dreamline's commercial warranty does not apply to damage or losses resulting from (i) other than normal and proper use and normal service conditions; (ii) improper installation, (iii) installation in or upon an unsuitable surface or areas; (iv) abuse, (v) accident, (vi) alteration, (vii) misuse, (viii) neglect, (ix) unauthorized repair or the failure to utilize suitably qualified and trained persons to perform service and/or repair of the Product, (x) improper maintenance, (xi) failure to follow installation, operating, cleaning or maintenance instructions, and (xii) use of "non-authorized" parts. "