

VP6036CTS2

60 x 36 x 79



PROFESSIONAL

FEATURES

- Modern, matte finish
- Smooth, 4-piece kit
- Easy Wedge & Lock installation
- Caulkless installation
- Integral soap shelves
- Meets FHA Code Compliant Requirement 6 for Backing Only
- Available in White only
- 15 Year residential limited warranty

COMPONENTS OF KIT

Standard

- VP6036CTL (Tub) or VP6036CTR (Tub)
- VP6062CBW2 (Back Wall)
- VP2962CSW (Side Walls)

FHA Code Compliant

- VP6036CTL (Tub) or VP6036CTR (Tub)
- VP6062CBW2A (Back Wall)
- VP2962CSWA (Side Walls)

PACKAGED DIMENSIONS

- Tub: 63 x 40 1/2 x 21
- Back Wall: 65 x 61 1/2 x 8 1/2
- Side Wall Set: 64 1/4 x 32 1/2 x 5

VERITEK® PRO

Lightweight and durable, Veritek® Pro is produced with Swan Solid Surface, a proprietary SMC compound.

Veritek® Pro is the better bathroom solution and is a snap to install!

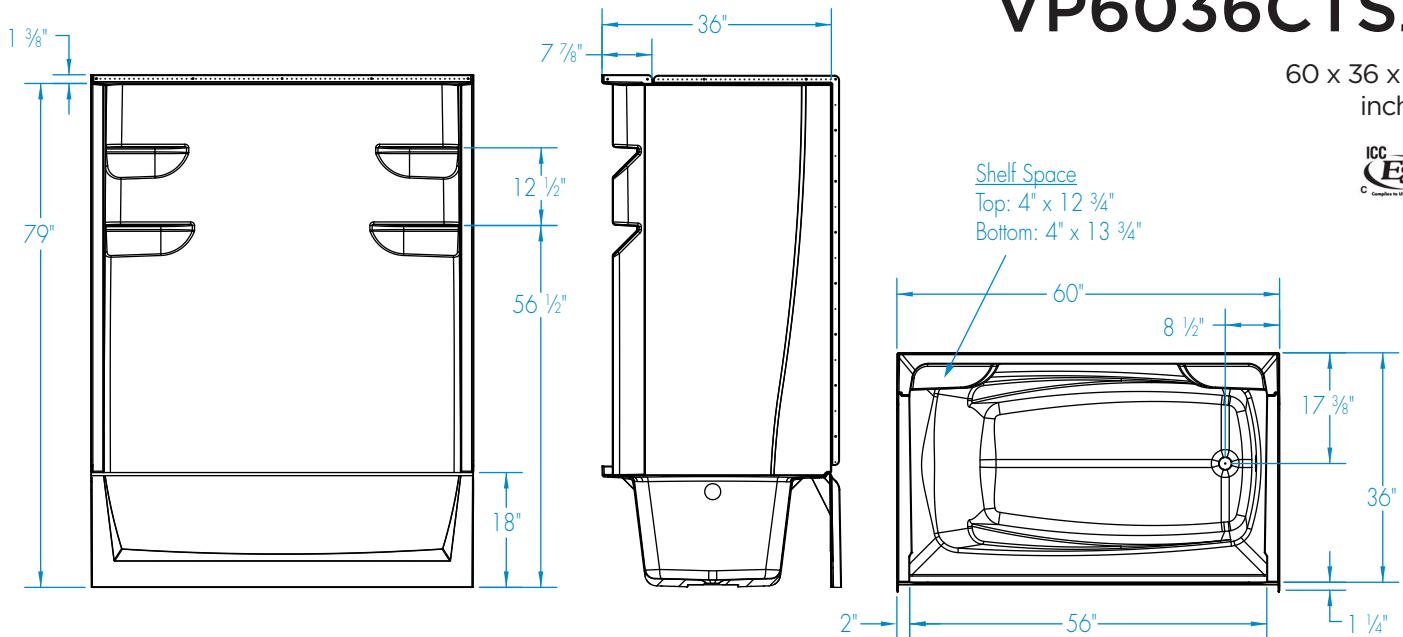
Available in the Following Offerings:

Depth	Width	Height Standard	Height AFR	Model Number			
				Standard	FHA	AFR	FHA & AFR
36	60	79	82	VP6036CTS2L/R	VP6036CTS2AL/R	VP6036CTSM2L/R	VP6036CTSM2AL/R

- Standard: Base model shower, tub, or tub shower offering
- FHA Code Compliant Requirement 6 for Backing (FHA): Backing is included for future grab bar installation
- Above Floor Rough (AFR): Clearance for drain placement, eliminating the need for drain relocation
- FHA Code Compliant (FHA) & Above Floor Rough (AFR): A combination kit for FHA & AFR



VP6036CTS2

60 x 36 x 79
inches


FEATURES Dimensional Tolerance $\pm 3/8"$. Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

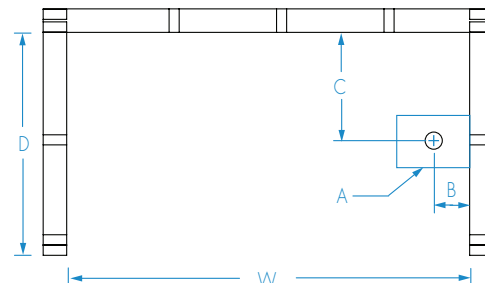
Type	Model #	Material	Height	Drain	Net Wt. lbs	Pkg. Wt. lbs
Standard Tub-Shower	VP6036CTS2L/R	Swan Solid Surface	79	LH or RH	158	173
FHA Tub-Shower	VP6036CTS2AL/R	Swan Solid Surface	79	LH or RH	188	203

DIMENSIONS

Specifications	inches
Width: Overall / Net	60
Depth: Overall / Net	37 1/4 / 36
Height: Overall / Net	80 3/8 / 79
Enclosure Opening	56
Skirt Height	18
Drain Rough-In (from Back Wall)	17 3/8
Drain Rough-In (from Side Wall)	2
Drain: Diameter / Clearance	2 / 1/2

FRAMING DIMENSIONS inches

Type	D Depth	W Width	H Height	A	B	C
Alcove	37 1/4	60	80 3/8	Box Out	2	17 3/8

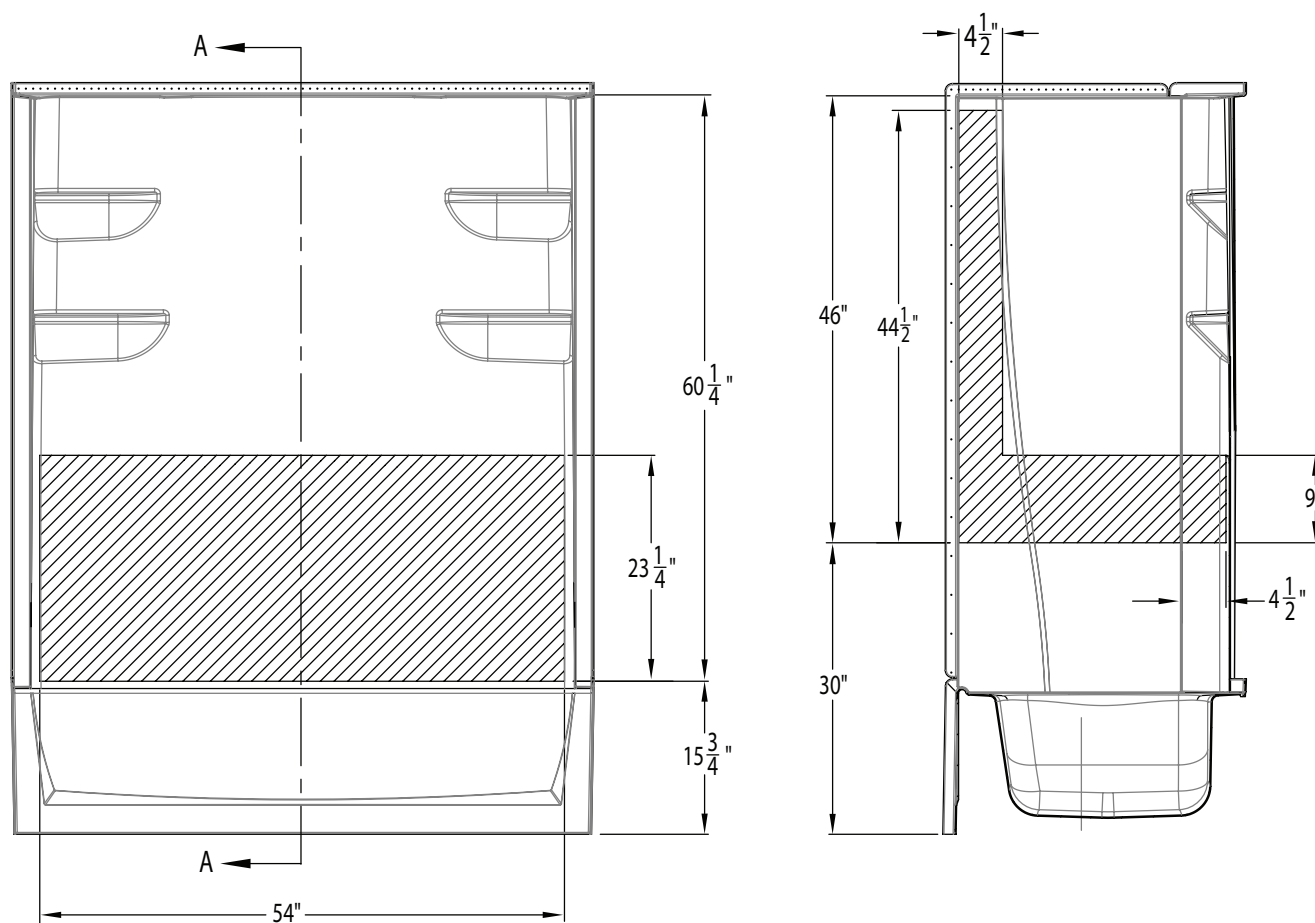


SUMP DATA

Top of Drain to Bottom of Overflow	Capacity to Overflow gal	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
12 5/8	52	50 1/2	42 5/8	27 3/8	22 3/8



VP6036CTS2

60 x 36 x 79
inches

 Backer Board

Applicable Standard Models

VP6030CTS2L/R
VP6030CTSM2L/R
VP6030CTSMIN2L/R
VP6030CTSM2L/R
VP6032CTSMIN2L/R
VP6032CTSM2L/R
VP6036CTS2L/R*
VP6036CTSM2L/R
VP6042CTS2L/R
VP6042CTSM2L/R

Applicable AFR Models

VP6030CTS2AL/R
VP6030CTSM2AL/R
VP6030CTSM2AL/R
VP6030CTSM2AL/R
VP6030CTSMN2AL/R
VP6032CTSM2AL/R
VP6032CTSMN2AL/R
VP6036CTS2AL/R
VP6036CTSM2AL/R
VP6042CTS2AL/R
VP6042CTSM2AL/R

*Models meet ADA code when grab bars are installed to local ADA code standards.