


VP6032CTMM

60 x 32 x 21

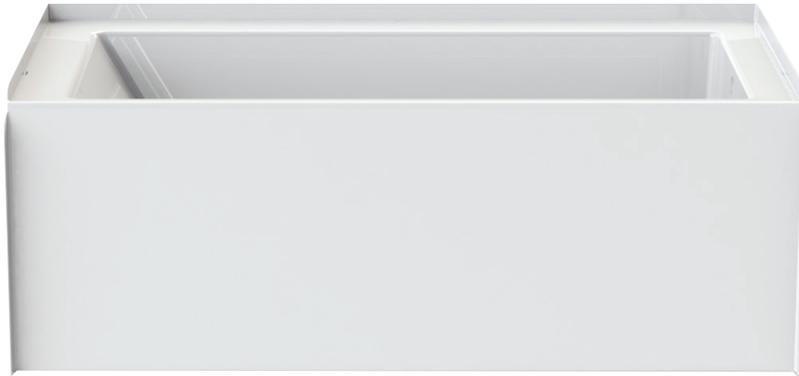

PROFESSIONAL

FEATURES

- Above Floor Rough (AFR)
- Pre-Leveled base
- Slip resistant, textured bottom
- Available in White only
- Left, right drain
- Modern, matte finish
- 15-year residential limited warranty

OPTIONS

- Coordinating wall sets available

PACKAGED DIMENSIONS

- 63 x 36 1/2 x 24 1/2

VERITEK PRO

Lightweight and durable, Veritek Pro is produced with Swan Solid Surface, a proprietary SMC compound.

Veritek Pro is the better bathroom solution and is a snap to install!

Available in the Following Offerings:



Depth	Width	Height Standard	Height AFR	Model Number	
				Standard	AFR
32	60	18	21	VP6032CTMIN	VP6032CTMM

- **Standard:** Base model shower, tub, or tub shower offering
- **Above Floor Rough (AFR):** Clearance for drain placement, eliminating the need for drain relocation




VP6032CTMM

60 x 32 x 21 inches

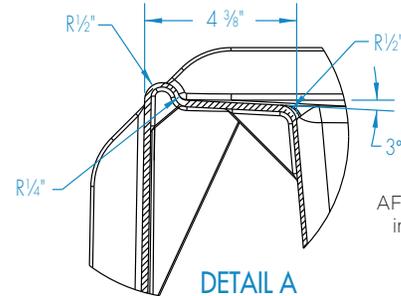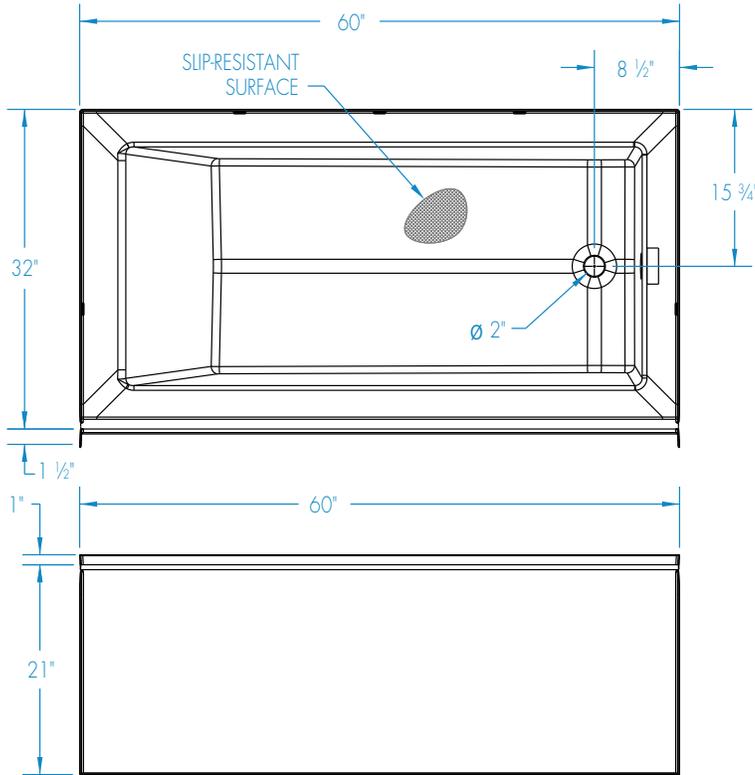

AFR: Allows for above the floor installation of waste, overflow and drainage.

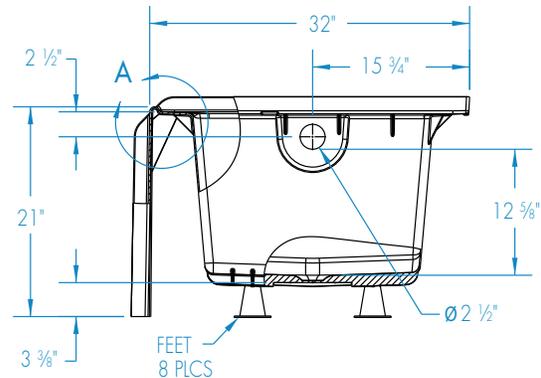
FEATURES Dimensional Tolerance $\pm 3/16"$. Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

Type	Model #	Material	Height	Drain	Net Wt. lbs.	Pkg. Wt. lbs.
AFR Soaker	VP6032CTMML/R	Swan Solid Surface	76	LH or RH	67	75


DIMENSIONS

Specifications	
Width: Overall / Net	60
Depth: Overall / Net	33 1/2 / 32
Height: Overall / Net	22 / 18
Enclosure Opening	-
Skirt Height	21
Drain Rough-In (from Back Wall)	15 3/4
Drain Rough-In (from Side Wall)	2 3/4
Drain: Diameter / Clearance	2 / 3 1/2

FRAMING DIMENSIONS

 inches

Type	D Depth	W Width	H Height	A	B	C
Alcove	33 1/2	60	22	Box Out	2 3/4	15 3/4

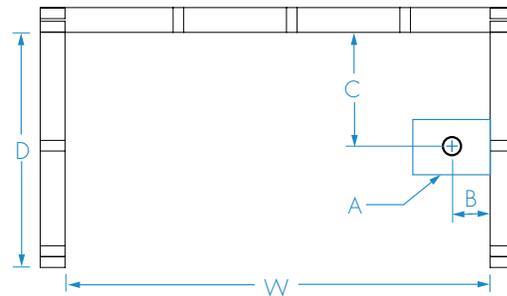

SUMP DATA

Top of Drain to Bottom of Overflow	Capacity to Overflow gal	Min. Operating Capacity gal	WIDTH @ centerline		DEPTH @ centerline	
			Top	Bottom	Top	Bottom
12 5/8	52 3/10	-	51 5/8	42 1/8	23 7/8	21 3/8

Rev. 03.16.22

