


FRONT VIEW

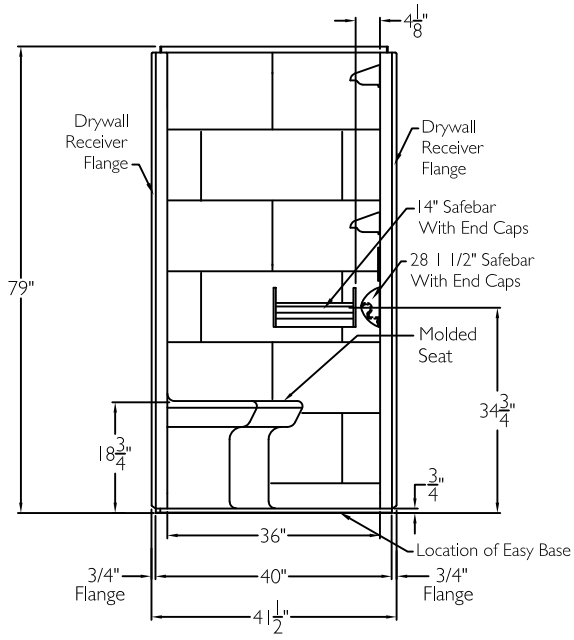





SIDE VIEW

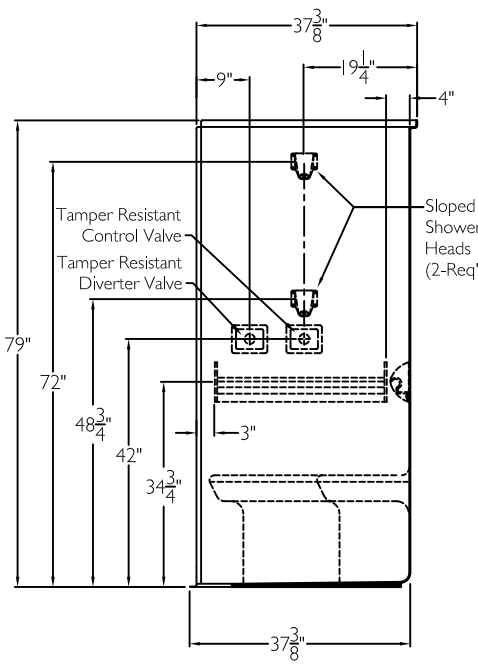


TOP VIEW

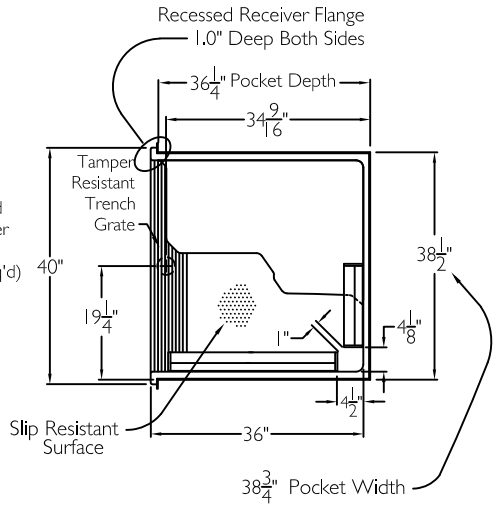

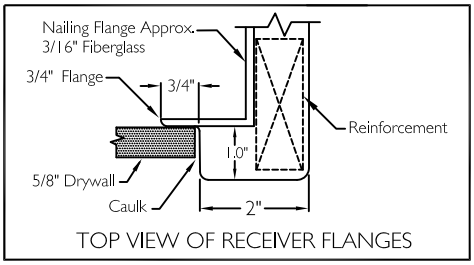

CROSS SECTION OF THRESHOLD

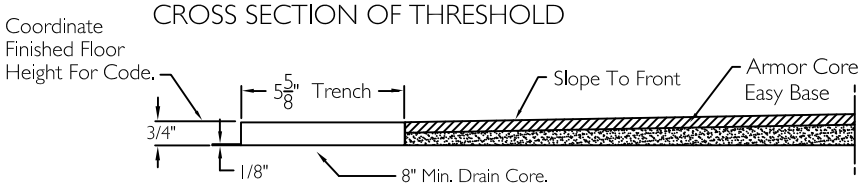

SPECIFICATION SHEET

This shower enclosure shall be model XST 3838 TR .75 RRF left, or right. Finished surface shall be of a sanitary grade AcrylX™ applied acrylic. The base shall be attached to the sump in such manner to form an integral part with an inner and outer coating of polyester resin. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 41 1/2" (40" without flange) x 37 3/8" x 79". The unit shall meet ANSI Z124.1.2, CSA B45.5, UPC, and ADA.

HANDED BY THE VALVE

The enclosure shall be equipped with the following accessories: 1) One 14" SafeBar Anti-Ligature horizontal bar on the back wall, 2) One 28 1/2" SafeBar Anti-Ligature horizontal bar on the valve wall, bars include end caps, secured from the rear with stainless steel bolts, and full length metal angle iron, 3) Molded ADA style seat, 4) Molded recessed receiver flanges on each side, 5) Subway tile pattern, 6) Factory installed valve package for ADA and tamper resistant configurations, includes control valve, diverter valve, vacuum breaker, and two sloped shower heads, no factory piping, 7) Integral front trench drain, 8) Tamper-resistant trench grate, 9) Armor Core Easy Base, 10) 3/4" threshold.

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 38 1/2" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALLOW BOLT CLEARANCE FORA DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSURE.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR.

Job Name	Approved By Print Name		Date	COMFORT DESIGNS
Project No	Approved By Signature			Model No. XST 3838 TR .75 MS RRF ADA-PHYC
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Architect			Drawing No. XST 3838 TR .75 RRF L-SafeBar Config MS Tamp-Resist ADA VP Easy Base
	Engineer			Date Issued. 4-16-14 / Drawing Rev. 5-3-24
	Rep			Material. AcrylX™ Applied Acrylic
	Wholesaler			Color.
	Comments			Dimensions are in inches. Due to the nature of the materials dimensions may vary ± 1/2"