

EVERCLEAN® WHIRLPOOL:

- Minimalist design with contoured backrest
- Acrylic with fiberglass reinforcement
- Pre-leveled tub bottom
- Drop-in or under-mount installation
- EverClean System
- Single speed, self-draining pump/motor
- Side-mounted air switch On/Off
- Two silent air volume controls
- Eight multi-directional and flow-adjustable jets
- Whirlpool heater Quick-Connect system
(Safe-T-Heater purchased separately)

- 2932.018C-D0** Zero-Edge™ low-profile 0.5" deck height
- 2932.018C-D2** Standard profile 2" deck height
- 2932.018C-D4** Tall profile 4" deck height

BATHING POOL:

- Same as above without whirlpool system

- 2932.002-D0** Zero-Edge low-profile 0.5" deck height
- 2932.002-D2** Standard profile 2" deck height
- 2932.002-D4** Tall profile 4" deck height

Nominal Dimensions:

60" x 32" x 22-1/2"
(1524 x 813 x 572mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

American Standard whirlpools and air baths with EverClean incorporate a patented silver-ion additive right into the circulation piping to protect the pipes from mold, mildew, algae and fungus that could cause deterioration or staining of the pipes.



To Be Specified - Required:

- Color:
- Bath Filler: (specify finish)
- Bath Drain: (specify finish)

To Be Specified - Optional:

- Safe-T-Heater*: 9075.120




For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

* **NOTE:** The Safe-T-Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS AND PRODUCT SPECIFICATIONS

American Standard®, the American Standard logo and all associated product names are exclusively owned by AS America, Inc., and are registered or unregistered trademarks in the U.S. and internationally. © 2024 AS America, Inc. All rights reserved.

SPECIFICATIONS:

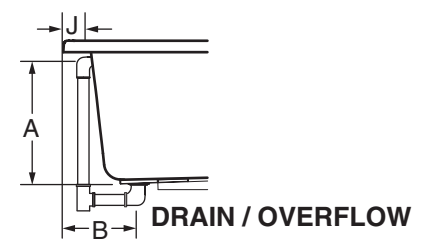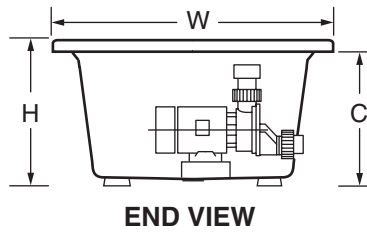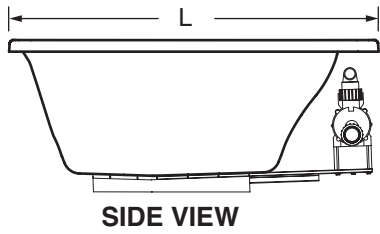


GENERAL SPECIFICATIONS FOR STUDIO 5' X 32" WHIRLPOOLS AND BATH TUBS

Description	Deck Trim Option	Dimensions L-W-H	Drain / Overflow	Height to Underside of Deck: C	Cut Out Pier G x F	Rough-In Recess E x D	Tub Edge to Centerline Overflow: J	Weight with Water / Floor Loading	Product Weight	Gallon to Overflow	Whirlpool Operating Volume
2932 Studio 5' x 32"	Zero (5/8")	L 59-1/2" (1511mm) W 31-1/2" (800mm) H 22-1/2" (572mm)	A 17-3/4" (451mm) B 10-3/4" (273mm)	C 21-7/8" (556mm)	58" (1473mm) x 30" (762mm)	59-11/16" (1516mm) x 30" (762mm)		581 lb. (264 kg)/ 44 lb./sq.ft. (213 kg/sq.m)	90 lb. (198 kg.)	59 gal. (224 l.)	54 gal. (205 l.)
2932 Studio 5' x 32"	2"	L 59-3/4" (1518mm) W 31-3/4" (806mm) H 22-1/2" (572mm)	A 17-3/4" (451mm) B 10-7/8" (276mm)	C 20-1/2" (521mm)	58-1/4" (1480mm) x 30-1/4" (768mm)	59-15/16" (1522mm) x 30-1/4" (768mm)		581 lb. (264 kg)/ 44 lb./sq.ft. (213 kg/sq.m)	90 lb. (198 kg.)	59 gal. (224 l.)	54 gal. (205 l.)
2932 Studio 5' x 32"	4"	L 60" (1524mm) W 32" (813mm) H 22-1/2" (572mm)	A 17-3/4" (451mm) B 11" (279mm)	18-1/2" (470mm)	58-1/2" (1486mm) x 30-1/2" (775mm)	60-3/16" (1529mm) x 30-1/2" (775mm)		581 lb. (264 kg)/ 44 lb./sq.ft. (213 kg/sq.m)	90 lb. (198 kg.)	59 gal. (224 l.)	54 gal. (205 l.)
2933 Studio 5' x 32" w/Tile Flange	N/A	L 60" (1524mm) W 31-7/8" (810mm) H 22-1/2" (572mm)	A 17-3/4" (451mm) B 11" (279mm)	C 20-1/2" (521mm)	N/A	60-3/16" (1529mm) x 30-3/8" (772mm)		581 lb. (264 kg)/ 44 lb./sq.ft. (213 kg/sq.m)	90 lb. (198 kg.)	59 gal. (224 l.)	54 gal. (205 l.)

TABLE 2

**ROUGH-IN REFERENCES
MODEL SERIES 2932 & 2933**

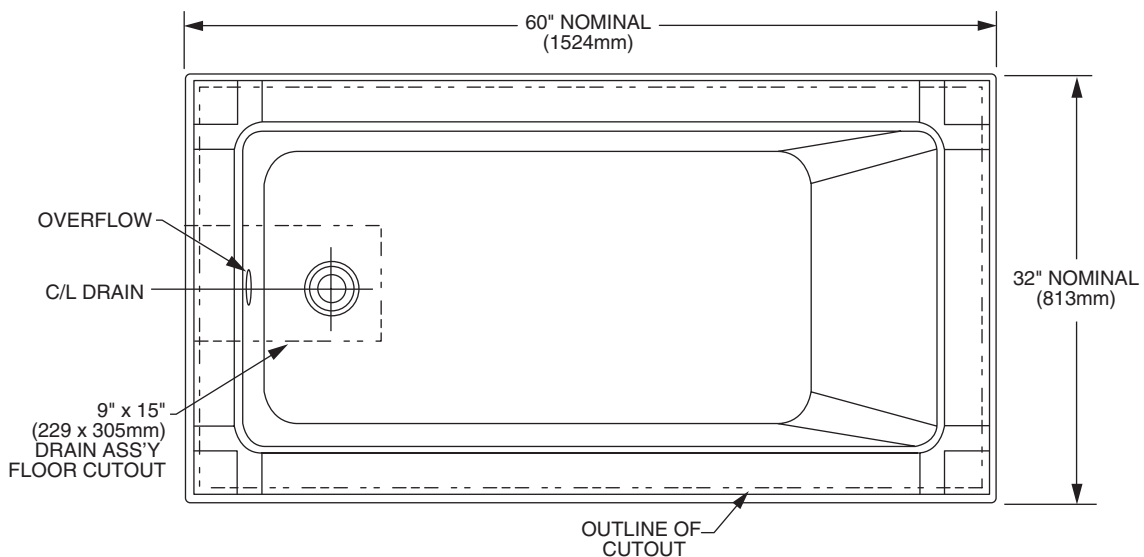

PLACE ROUGH-IN HERE

GENERAL SPECIFICATIONS FOR 2932 STUDIO® WHIRLPOOL

INSTALLED SIZE	60 x 32 x 22-1/2 In. (1524 x 813 x 572mm)
WEIGHT	90 Lbs. (41 Kg.)
WEIGHT w/WATER	581 Lbs. (264 Kg.)
GAL. TO OVERFLOW	59 Gal. (223 L)
MIN. OPERATING VOL.	54 Gal. (204 L)
BATHING WELL AT SUMP	40-1/4 x 20 In. (1022 x 508mm)
BATHING WELL AT RIM	51 x 23 In. (1295 x 584mm)
WATER DEPTH TO OVERFLOW	15-3/4 In. (400mm)
FLOOR LOADING (PROJECTED AREA)	44 Lbs./Sq.Ft. (213 Kgs./Sq.m)
PTS.	23.8
CUBE (FT³)	33

GENERAL SPECIFICATIONS FOR 2932 STUDIO® BATHING POOL

INSTALLED SIZE	60 x 32 x 21-1/2 In. (1524 x 813 x 546mm)
WEIGHT	60 Lbs. (27 Kg.)
WEIGHT w/WATER	551 Lbs. (250 Kg.)
GAL. TO OVERFLOW	59 Gal. (223 L)
BATHING WELL AT SUMP	40-1/4 x 20 In. (1022 x 508mm)
BATHING WELL AT RIM	51 x 23 In. (1295 x 584mm)
WATER DEPTH TO OVERFLOW	15-3/4 In. (400mm)
FLOOR LOADING (PROJECTED AREA)	41 Lbs./Sq.Ft. (202 Kgs./Sq.m)
PTS.	23.8
CUBE (FT³)	33

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED FOR ADDITIONAL INFORMATION.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.