

Drop-In Soaking Bathtub:

- Minimalist design with contoured backrest
- Acrylic with fiberglass reinforcement
- Pre-leveled tub bottom
- Drop-in or under-mount installation
- Zero-Edge low-profile 0.5" deck height



Nominal Dimensions:


60" x 36" x 22-1/2"
(1524 x 914 x 572mm)

Compliance Certifications - Meets or Exceeds the Following Specifications:

- ANSI Z124.1 for Plastic Bathtubs

SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS AND PRODUCT SPECIFICATIONS

MODEL 220AS9340-D0

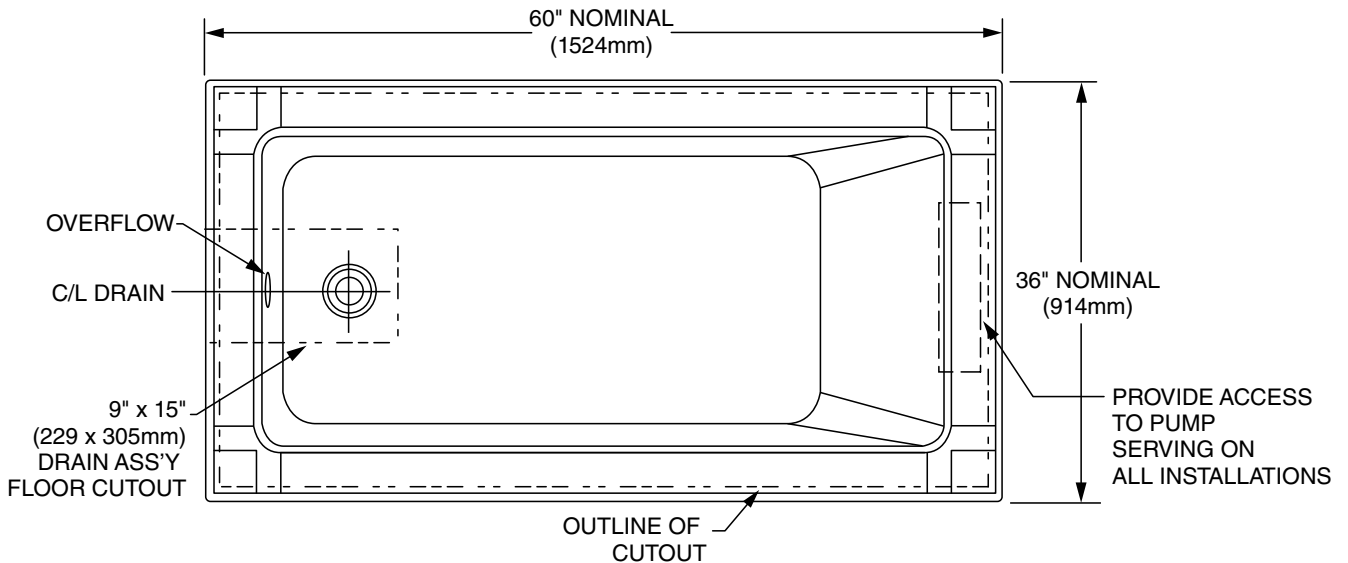

GENERAL SPECIFICATIONS FOR 220AS9340-D0 FERREN	
INSTALLED SIZE	60 x 36 x 22-1/2 In. (1524 x 914 x 572mm)
WEIGHT	95 Lbs. (43 Kg.)
WEIGHT w/WATER	686 Lbs. (311 Kg.)
GAL. TO OVERFLOW	71 Gal. (269 L)
WATER DEPTH TO OVERFLOW	17-3/4 In. (451mm)
FLOOR LOADING (PROJECTED AREA)	46 Lbs./Sq.Ft. (223 Kgs./Sq.m)
PTS.	13.58
CUBE (FT ³)	31.5

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED FOR ADDITIONAL INFORMATION.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.