

Submittal Data

CONDENS SAFE NEUTRALIZER CS2

Job Name: _____
 Location: _____
 Engineer: _____
 Contractor: _____
 Sales Rep.: _____


Submitted by: _____ Date: _____
 Approved by: _____ Date: _____
 Order No.: _____ Date: _____
 Notes: _____

DESCRIPTION


CondensSAFE CS2 neutralizes condensate issued by modulating condensing gas heating devices. A pipe links the heating device to the CondensSAFE CS2 unit to treat the condensate. The media in the unit neutralizes the condensate pH to make it safe for the building components and most importantly, the environment. CondensSAFE CS2 contains one section including a media bag which must be replaced every year. We have included a 12-month time indicator which must be activated and stick to the top of the unit so the user knows exactly when to replace it. The unit weighs 1.3 kg including one media bag and the connections.

#Model	Length		Width		Height		Inlet Outlet	Treatment capacity				Max. treatment flow rate*
	in	cm	in	cm	in	cm		MBH	kWh	gal/h	L/h	
CS2	5 3/4	14.5	4 3/4	12	5	13	3/4" FNPT	525	154	2.1	8	2.1 GPH (8 LPH)

*Verify condensate flow rate on your appliance. In general, 500,000 BTU/hr at 92% efficiency should generate around 1.6 gal/hr.

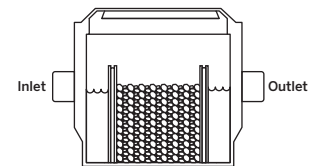

<h3>INCLUDED</h3> <ul style="list-style-type: none"> ▶ One straight fittings 3/4" MNPT X glued ▶ One 90° elbow 3/4" MNPT X glued 	<h3>OPTIONS</h3> <ul style="list-style-type: none"> <input type="checkbox"/> 10 feet of flexible hose including 2 x 3/4" barbed fittings and 2 x 1/2" barbed fittings <input type="checkbox"/> Additional media bag(s) including a 12-month time indicator 	<h3>Quantity</h3> <p>#CSJK</p> <p>#CSM2</p>
--	--	---

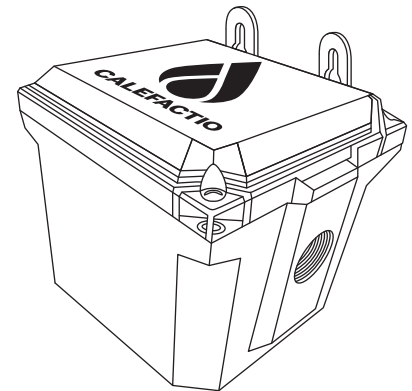

TYPICAL SPECIFICATIONS

Furnish and install as shown on plans a condensate neutralizer unit CondensSAFE CS2 manufactured by Calefactio Solutions Inc. The condensate neutralizer unit must neutralize a condensate volume of 8 L/h (2.1 gal/h) from a 525 MBH (154 kWh) capacity heating device, so be equipped with one neutralizing media bags (#CSM2) including 12-month time indicator.

WARRANTY

CondensSAFE offers a one-year limited warranty from the date of purchase. The warranty is only valid if the product is installed and used under normal working conditions and for the purpose it was intended.