

H-14**SECTION H**Chemicals & Shop Supplies
Quality, Durability, Reliability**H****CHEMICALS & SHOP SUPPLIES****GAS LEAK DETECTOR - BY LYNCAR**

Formulated to locate gas leaks in pipe lines, valves, pressure vessels, cylinders, tanks, etc. After applying leak detector directly from container to exterior surface, large bubbles will appear if there is gas escaping.

May be used to find leaks of air, natural gas, refrigerants, CO2 and most other gases. This product is non-toxic, non-flammable and non-freezing to 10°F.

PART#	DESCRIPTION
59082	1oz bottle
59083	237ml dabber top
59085	473ml spray top

EASE - ON COUPLING GREASE

- LYNCAR'S EASE-ON grease, for mechanical couplings.
- 908 gram tubs and 12 per case
- NSF ANSI N5F61

PART#	DESCRIPTION
506060	EASE - ON coupling grease

LUBRICATING OIL

- An all purpose oil for use on motors, bearings and wherever metal lubrication is desired.
- Contains rust and corrosion preventatives
- Not for use on internal combustion engines or extreme heat producing operations
- Packaged with a telescopic spout so oil can be applied in hard to reach places

PART#	DESCRIPTION
59084	4 oz. bottle

CHEMICAL & SHOP

The BEST Plumbing Specialties. One Source.

H-15

CHEMICALS & SHOP SUPPLIES

H

PROTOWEL - TOUGH WIPE



- A strong abrasive towel impregnated with hand cleaner
- Formulated to remove adhesives, sealants, spray paints, enamels, latex paint, grease tar, ink and much more
- Can be used to clean hands, tools, equipment, desk tops, etc.
- Size: 10" x 12-1/2"
- 70 count rolls

PART#	DESCRIPTION	CASE
59080	70 wipes	6

STEM LUBE HEAT PROOF GREASE



- Specially formulated for use on all metal faucets and valve stems carrying air, steam, and hot or cold water
- Also lubricates ballcocks, plungers, packings and washers
- Can be used on potable water since it is safe and nontoxic

PART#	DESCRIPTION
3155	Stem lube heat proof grease

**X SEAL 3C AF (ASBESTOS FREE)
COLD CAULKING COMPOUND CORD**



- Asbestos-free
- Sulphate resistant
- Ready for use - no mixing
- Quick and easy to apply
- Can be used in damp conditions
- Provides an immediate seal
- Withstands pressures in excess of 6.9 N/Mm² (1000 Lbf/In²)
- Accommodates vibration and limited expansion and deflection movement
- Resistant to biological degradation
- Cord eliminates wastage
- Product previously known as PC4

PART#	DESCRIPTION
2895	2 m. length
2896	3k tin, 14m. approximately

CHEMICAL & SHOP



H-16

SECTION H

Chemicals & Shop Supplies
Quality, Durability, Reliability

H

SILICONE SEALANTS

CHEMICAL & SHOP

SILICONE SEALANT



- LYNCAR'S 100% Silicone, and kitchen and bath comes in 300ml tubes in white, clear, and grey. stays flexible, won't crack or peel, 40 year expected lifetime
- Adheres to most surfaces
- Kitchen & bath features a watertight & mildew resistance
- Siliconized is a lower cost product with a 25 year expected lifetime
- All Silicone products are in a 12 tube (300ml) display box

PART#	DESCRIPTION	COLOUR
39001	Silicone	CLEAR
39002	Silicone	WHITE
39003	Silicone	GREY
39301	Kitchen & bath	CLEAR
39302	Kitchen & bath	WHITE
39303	Kitchen & bath	GREY
39304	Kitchen & bath	ALMOND
39401	Siliconized	CLEAR
39402	Siliconized	WHITE

SILICONE TUBE



- Super soft
- Stainless
- Never hardens
- White colour

PART#	SIZE	CASE
39222	162ml tube silicone	12/case

UNIVERSAL WATER SOLUBLE SOLDER FLUX



- LYNCAR'S "S-39" is a completely water soluble, flushable, self cleaning flux for soldering copper lines in plumbing.
- "S-39" is an acid free, lead free, liquid soldering flux, that is suitable on all types of tin solder (from 40/60 to lead free), copper, brass, polished chrome, steel, zinc, nickel, galvanized iron, silver, tin, lead and their alloys

PART#	SIZE	CASE
506057	80 ml	16
506058	320 ml	12

MAGIC WRAP



- Emergency repair kit on a roll
- 1" x 16' roll
- Stretches to 3 times its length
- Non adhesive
- Soft bonding
- Water & air tight
- Temperature resistant

PART#	DESCRIPTION
59054	Magic wrap



The BEST Plumbing Specialties. One Source.

H-17

CHEMICALS & SHOP SUPPLIES

H

CANDLE WICKING



- Seals bonnet nuts
- Lubricates stems
- Random length

PART#	DESCRIPTION
2872	Candle wicking

GRAPHITE PACKING



- A round cord formable and flexible gasketing material made from pure 100% P.T.F.E. It is used for valve stem packing and flange gasketing applications
- Highly conformable will not seize, has excellent chemical resistance and operates from temperatures -400° F to +600° F
- Not intended for food contact applications

PART#	SIZE
1886	3/32" x 10'
1887	5/32" x 10'

TEFLON PACKING



- 1/16" x 24" Length

PART#	DESCRIPTION
2290	Graphite packing

OAKUM - CUT LENGTH



- Convenient, labour saving cut lengths
- Non-splitting
- Contains no tar
- Made to pack well, caulks tight
- Treated with a special compound so that it expands when wet
- Lead ladles, Lead pots, Joint runners and caulking tools are also available

PART#	DESCRIPTION
2899	1lb bag
2897	5lbs box

SWIFT SET CEMENT



- Cement patching compound
- Sets in minutes
- For concrete & masonry repairs
- For floors, precast & drain rework
- For repairs up to 2" thick
- Clean up tools with water

PART#	DESCRIPTION
2893	2kg tub

PLUG TITE CEMENT



- Stops flow of water through breaks in concrete & masonry
- Works on basement walls, floor, pools etc.
- Fills cracks 3-5 minutes set-time
- Clean up tools with water

PART#	DESCRIPTION
2894	2kg tub

CHEMICAL & SHOP



H-18

SECTION H

Chemicals & Shop Supplies
Quality, Durability, Reliability

H

CHEMICALS & SHOP SUPPLIES

PVC CEMENT WET/DRY



- One stop cement
- Low VOC
- All weather
- Fast set time 20 seconds
- NSF61, NSF14 approved
- Meets ASTM D2564

PART#	DESCRIPTION	CASE
506059	237ml BT can	24

SOLDER FLUX PASTE



- Self cleaning
- Noncorrosive
- Lead free
- Use on Copper, Iron, Steel
- Not recommended for Aluminum

PART#	DESCRIPTION	CASE
59110	4oz jar	24

WATER SOLUBLE PASTE FLUX



- AQUA PRO 2000
- Water soluble flux
- Non fuming and lead free
- Meets ASTM B813

PART#	DESCRIPTION	CASE
59115	4oz	24


PLUMBER'S PUTTY



- Does not harden
- Cream colour

PART#	DESCRIPTION	CASE
59100	14oz	24
59105	5lb tub	6

BRUSH IN CAN



- LYNCAR offers the popular brush in can with either a metal OR plastic jug.
- Available in two sizes 500ml or 1 litre containers
- Our brush offers the "Click It" feature a natural bristle adjustable brush that is leak proof, and the handle adjusts in the cap.

PART#	DESCRIPTION
78810	Click it brush w/ 500 ml metal can
78812	Click it brush w/ 1 litre plastic can
78814	Click it brush w/ 500 ml plastic can
4656	"Click it" brush ONLY

CHEMICAL & SHOP



The BEST Plumbing Specialties. One Source.

H-19

CHEMICALS & SHOP SUPPLIES

H

FLOW CLEAN DESCALER SOLUTION TANKLESS WATER HEATER CLEANER & KIT



- Cleaner for potable water systems
- Non corrosive, non toxic
- Biodegradable and zero VOC
- Dissolves water scale, lime, rust and other deposits
- In tankless water heaters, also in ice machines, boilers, chillers, exchangers etc.
- NSF approved

DESCALER KIT

- 350 GPH pump
- 2 pcs 60" rubber hoses
- 1 litre solution bucket with lid

PART#	DESCRIPTION	CASE
15150	32oz (1 litre) plastic jug	12
15151	4 litre jug	6
15152	Descaler kit	1


CHEMICAL & SHOP

PIPE WRAP TAPE - PVC



- LYNCAR all weather pipe protection tape is a pure physical barrier that is moisture proof, inert and non-conducting. Whether the need is to protect overhead piping in industrial applications, exposed pipe anywhere, or direct burial piping. This tape gives a completely uniform coating all around.
- Tough PVC plastic tape with special high tack adhesives formulated to resist corrosion
- Easy to apply by hand with no special tools or equipment
- Positive protection against abrasion and corrosive action for steel pipe, fittings and electrical conduit systems
- Corrosion protection for metal piping systems above and below ground
- Corrosion protection for fittings and joints on mill coated pipe
- Corrosion protection of electrical conduit and fittings
- Resists corrosive action by salt water, soil acids, alkalis and salts
- Prevents dielectric corrosion between buried steel pipe and soil minerals
- Resists the effects of outdoor weathering and sunlight exposure
- High abrasion resistance
- Highly conformable over a wide temperature range
- Excellent insulating properties
- Resists commonly encountered chemicals and chemical vapors
- Protects against fungus and bacteria

The type printed on the actual tape as shown below.

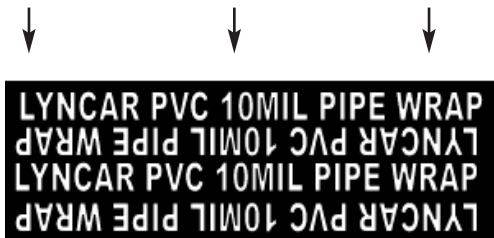

PART#	WIDTH	MILL	LENGTH	CASE
9051	1"	10	100'	48
9052	2"	10	100'	24
9054	4"	10	100'	12