



## ANY FLOW® SERIES

### FROST PROOF YARD HYDRANT FEATURES/BENEFITS


The Merrill *Any Flow*® Yard Hydrant gives year 'round water service. It drains below the frostline when shut off, and features a powder coated head which enhances resistance to corrosion, UV and abrasion. The *Any Flow* hydrant has had only a few improvements since 1949. These improvements, the exclusive features and benefits, and the time-proven basic design, is why we believe the *Any Flow* is the best yard hydrant manufactured by anyone.

- \* (1) **ALL-WEATHER POWDER-COAT FINISH LEVER CONTROL** operates by cam principle and provides variable flow from trickle to full force.  
**BENEFIT:** Variable flow with no lock that rusts in place.
- (2) **DRAW STRAPS** are made of 1040 hot rolled steel which is much harder (Brinell 175/200) and stronger. Greatly reduces wear of straps and eliminates side pull on operating rod.  
**BENEFIT:** Longest operating life.
- \* (3) **STAINLESS STEEL OPERATING STEM** is ground and polished and will not cut out packing and packing nut, like brass rod used by other companies.  
**BENEFIT:** Best material for longest operating life.
- (4) **HEAVY-DUTY SOLID BRASS OR NO-LEAD BRASS HOSE ADAPTER** threaded for standard 3/4" hose coupling.  
**BENEFIT:** Standard hose fitting readily available.
- (5) **ALL-WEATHER POWDER-COAT FINISH EXTRA THICK WALLED HEAD CASTING** greatly reduces breakage and ensures longer life.  
**BENEFIT:** Time-proven heavy-duty design takes years of abuse.
- \* (6) **PIVOT CONNECTOR WITH TWO NUTS** provides simple positive adjustment and eliminates unreliable set screws.  
**BENEFIT:** Adjustable for years, not like rusted in set screws.
- (7) **NO EXPOSED THREADS** on galvanized/stainless steel rod and threads on galvanized/stainless steel pipe are coated with bitumastic to prevent rusting and prolong life of hydrant.  
**BENEFIT:** No exposed steel to rust.
- (8) **EXTRA THICK WALLED VALVE BODY** to ensure longer life and trouble free service.  
**BENEFIT:** Time-proven heavy-duty design.
- \* (9) **SELF ADJUSTING PLUNGER** ensures even flow from trickle to full force. Closes drain at any flow rate and opens drain in off position to prevent freezing.  
**BENEFIT:** Longest operating life available in the industry by over 200%.
- \* (10) **KRATON™ G CUP SEALS** provides a much longer life than leather, close tolerance uniformity, uneffected by chemicals and passed a 1 million cycle test.  
**BENEFIT:** Longest operating seals in the industry.
- (11) **3/8L BEVELED BIBB WASHER** made of SBR compound with 90 Durometer hardness, assures positive shut-off and longer life than soft one piece plunger.  
**BENEFIT:** Longer operating life than all competitors.
- \* (12) **STAINLESS STEEL SPRING** takes up slack of normal wear and eliminates numerous adjustments of hydrant head linkage.  
**BENEFIT:** Automatically adjusts for years of service.
- \* (13) **SWIVEL PARTS** permit withdrawal of moving parts without digging up hydrant. Nothing in head assembly to disconnect or adjust when removing. Simply unscrew entire head assembly from galvanized pipe and pull up valve stem with plunger for inspection.  
**BENEFIT:** If parts don't swivel, they could be unscrewed from rod when taking off head above ground.

**\*EXCLUSIVE MERRILL QUALITY FEATURES**



*Any Flow* No-Lead Model  
 Certified to NSF/ANSI/CAN 372 Standard 

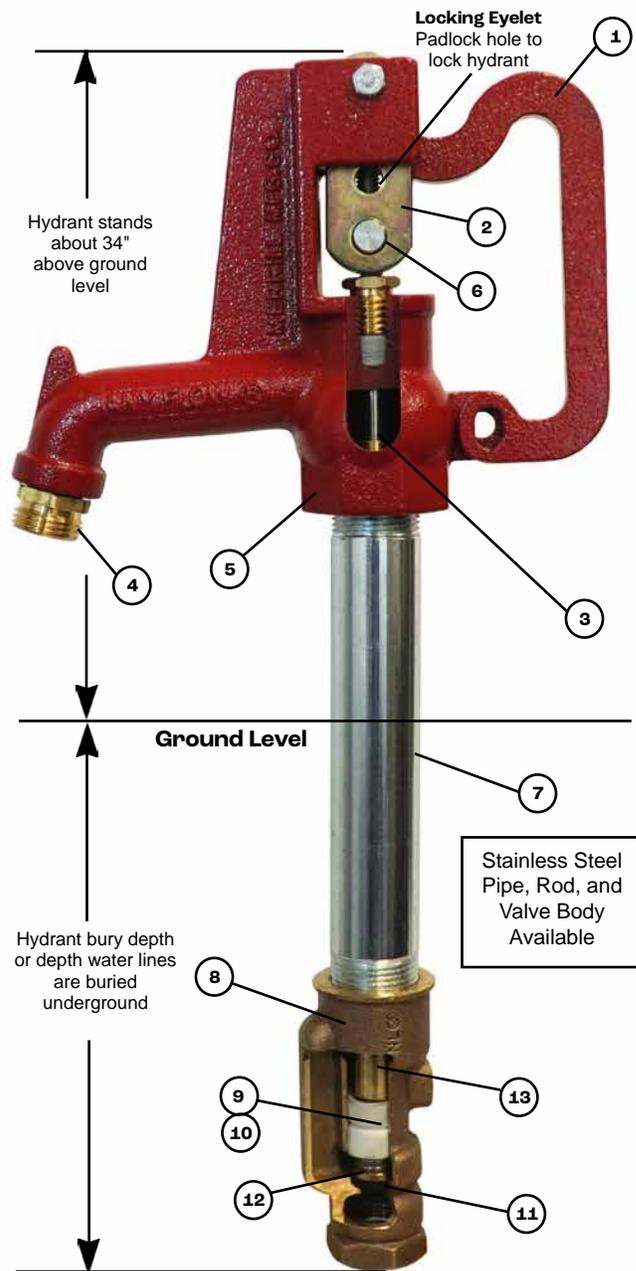

Merrill's AF7504 or 4' Bury Hydrant is about 6' - 9-1/2" long. 4' is buried and 34" is above ground.



No-Lead



**MERRILL**  
MANUFACTURING

Lead



# ANY FLOW® SERIES

## SPECIFICATIONS

### Standard 3/4" ANY FLOW® (AF)

Inlet - 3/4" NPT in Heavy Casting  
Outlet - 3/4" Hose Thread Adapter  
Stainless Steel Operating Stem Thru Packing  
Automatic Self-Adjusting Plunger  
1" Galvanized Stand Pipe  
7/16" Galvanized Operating Rod

## STANDARD 3/4" ANY FLOW® FROST PROOF YARD HYDRANTS

Order No.	UPC Bar Code (Qty. 1)	Pipe Connection x Pipe Depth	Pipe Size	Overall Length	Approx. Wt./Lbs.
▲ AF7501	6 42367 00738 6	3/4" x 1' Bury	1" Galv.	45.5"	13.5
▲ AF7502	6 42367 00739 3	3/4" x 2' Bury	1" Galv.	57.5"	15.5
▲ AF7503	6 42367 00740 9	3/4" x 3' Bury	1" Galv.	69.5"	17.5
▲ AF7504	6 42367 00741 6	3/4" x 4' Bury	1" Galv.	81.5"	19.5
▲ AF7505	6 42367 00742 3	3/4" x 5' Bury	1" Galv.	93.5"	21.5
▲ AF7506	6 42367 00743 0	3/4" x 6' Bury	1" Galv.	105.5"	23.5
▲ AF7507	6 42367 00744 7	3/4" x 7' Bury	1" Galv.	117.5"	25.5
▲ AF7508	6 42367 00745 4	3/4" x 8' Bury	1" Galv.	129.5"	27.5
▲ AF7510	6 42367 00746 1	3/4" x 10' Bury	1" Galv.	153.5"	31.5

## SPECIFICATIONS

### Stainless Steel 3/4" ANY FLOW® (AFSS)

Inlet - 3/4" NPT in Heavy Stainless Steel Casting  
Outlet - 3/4" No-Lead Hose Thread Adapter  
Stainless Steel Operating Stem Thru Packing  
Automatic Self-Adjusting Plunger  
**304 Stainless Steel Valve Body**  
1" Stainless Steel Pipe  
7/16" Stainless Steel Operating Rod

## STAINLESS STEEL 3/4" ANY FLOW® FROST PROOF YARD HYDRANTS

Order No.	UPC Bar Code (Qty. 1)	Pipe Connection x Pipe Depth	Pipe Size	Overall Length	Approx. Wt./Lbs.
▲ AFSS7501	6 42367 44251 4	3/4" x 1' Bury	1" Stainless Steel	45.5"	14.0
▲ AFSS7502	6 42367 44012 1	3/4" x 2' Bury	1" Stainless Steel	57.5"	16.0
▲ AFSS7503	6 42367 44013 8	3/4" x 3' Bury	1" Stainless Steel	69.5"	18.0
▲ AFSS7504	6 42367 44014 5	3/4" x 4' Bury	1" Stainless Steel	81.5"	20.5
▲ AFSS7505	6 42367 44252 1	3/4" x 5' Bury	1" Stainless Steel	93.5"	22.5
▲ AFSS7506	6 42367 44160 9	3/4" x 6' Bury	1" Stainless Steel	105.5"	24.5
▲ AFSS7507	6 42367 44202 6	3/4" x 7' Bury	1" Stainless Steel	117.5"	27.0
▲ AFSS7508	6 42367 44203 3	3/4" x 8' Bury	1" Stainless Steel	129.5"	29.0
▲ AFSS7510	6 42367 44253 8	3/4" x 10' Bury	1" Stainless Steel	153.5"	33.0

## SPECIFICATIONS

### Stainless Steel Pipe 3/4"

#### ANY FLOW® (AFB)

Inlet - 3/4" NPT in Heavy Casting  
Outlet - 3/4" Hose Thread Adapter  
Stainless Steel Operating Stem Thru Packing  
Automatic Self-Adjusting Plunger  
1" Stainless Steel Pipe  
7/16" Stainless Steel Operating Rod

## STAINLESS STEEL PIPE 3/4" ANY FLOW® FROST PROOF YARD HYDRANTS

Order No.	UPC Bar Code (Qty. 1)	Pipe Connection x Pipe Depth	Pipe Size	Overall Length	Approx. Wt./Lbs.
▲ AFB7501	6 42367 00747 8	3/4" x 1' Bury	1" Stainless Steel	45.5"	14.0
▲ AFB7502	6 42367 00748 5	3/4" x 2' Bury	1" Stainless Steel	57.5"	16.0
▲ AFB7503	6 42367 00749 2	3/4" x 3' Bury	1" Stainless Steel	69.5"	18.0
▲ AFB7504	6 42367 00750 8	3/4" x 4' Bury	1" Stainless Steel	81.5"	20.5
▲ AFB7505	6 42367 00751 5	3/4" x 5' Bury	1" Stainless Steel	93.5"	22.5
▲ AFB7506	6 42367 00752 2	3/4" x 6' Bury	1" Stainless Steel	105.5"	24.5
▲ AFB7507	6 42367 00753 9	3/4" x 7' Bury	1" Stainless Steel	117.5"	27.0
▲ AFB7508	6 42367 00754 6	3/4" x 8' Bury	1" Stainless Steel	129.5"	29.0
▲ AFB7510	6 42367 00755 3	3/4" x 10' Bury	1" Stainless Steel	153.5"	33.0

## SPECIFICATIONS

### NO LEAD 3/4" ANY FLOW® (AFNL)

NSF/ANSI/CAN 372 Standard

Inlet - 3/4" NPT in Heavy No-Lead Casting  
Outlet - 3/4" No-Lead Hose Thread Adapter  
Stainless Steel Operating Stem Thru Packing  
Automatic Self-Adjusting Plunger  
No-Lead Brass Valve Body  
1" Galvanized Stand Pipe  
7/16" Galvanized Operating Rod



## NO-LEAD 3/4" ANY FLOW® FROST PROOF YARD HYDRANTS

Order No.	UPC Bar Code (Qty. 1)	Pipe Connection x Pipe Depth	Pipe Size	Overall Length	Approx. Wt./Lbs.
▲ AFNL7501	6 42367 41806 9	3/4" x 1' Bury	1" Galv.	45.5"	13.5
▲ AFNL75015	6 42367 42428 2	3/4" x 1-1/2' Bury	1" Galv.	51.5"	14.7
▲ AFNL7502	6 42367 41807 6	3/4" x 2' Bury	1" Galv.	57.5"	15.5
▲ AFNL7503	6 42367 41808 3	3/4" x 3' Bury	1" Galv.	69.5"	17.5
▲ AFNL7504	6 42367 41809 0	3/4" x 4' Bury	1" Galv.	81.5"	19.5
▲ AFNL7505	6 42367 41810 6	3/4" x 5' Bury	1" Galv.	93.5"	21.5
▲ AFNL7506	6 42367 41811 3	3/4" x 6' Bury	1" Galv.	105.5"	23.5
▲ AFNL7507	6 42367 41812 0	3/4" x 7' Bury	1" Galv.	117.5"	25.5
▲ AFNL7508	6 42367 41813 7	3/4" x 8' Bury	1" Galv.	129.5"	27.5
▲ AFNL7510	6 42367 41814 4	3/4" x 10' Bury	1" Galv.	153.5"	31.5



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. (For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov))



WARNING: This product meets Federal USA Drinking Water requirements but has not been specifically tested or approved as no-lead in the State of California.



Lead



MERRILL MANUFACTURING



No-Lead

# ANY FLOW® HIGH CAPACITY SERIES

## SPECIFICATIONS

### High Capacity 1" ANY FLOW® (AF)

Inlet - 1" NPT in Heavy Casting  
Outlet - 3/4" Hose Thread Adapter  
Stainless Steel Operating Stem Thru Packing  
Automatic Self-Adjusting Plunger  
1-1/4" Galvanized Stand Pipe  
7/16" Galvanized Operating Rod

## SPECIFICATIONS

### High Capacity

### Stainless Steel 1" ANY FLOW® (AFB)

Inlet - 1" NPT in Heavy Casting  
Outlet - 3/4" Hose Thread Adapter  
Stainless Steel Operating Stem Thru Packing  
Automatic Self-Adjusting Plunger  
1-1/4" Stainless Steel Pipe  
7/16" Stainless Steel Operating Rod

## SPECIFICATIONS

### No-Lead High Capacity

### 1" ANY FLOW® (AFNL)

Inlet - 1" NPT in Heavy No-Lead Casting  
Outlet - 3/4" No-Lead Hose Thread Adapter  
Stainless Steel Operating Stem Thru Packing  
Automatic Self-Adjusting Plunger  
No-Lead Brass Valve Body  
1-1/4" Galvanized Stand Pipe  
7/16" Galvanized Operating Rod

## SPECIFICATIONS - No-Lead

### High Capacity

### Stainless Steel 1" ANY FLOW® (AFBNL)

Inlet - 1" NPT in Heavy No-Lead Casting  
Outlet - 3/4" No-Lead Hose Thread Adapter  
Stainless Steel Operating Stem Thru Packing  
Automatic Self-Adjusting Plunger  
No-Lead Brass Valve Body  
1-1/4" Stainless Steel Pipe  
7/16" Stainless Steel Operating Rod

## HIGH CAPACITY 1" ANY FLOW®

### FROST PROOF YARD HYDRANTS

Order No.	UPC Bar Code (Qty. 1)	Pipe Connection x Pipe Depth	Pipe Size	Overall Length	Approx. Wt./Lbs.
AF101	6 42367 00729 4	1" x 1' Bury	1-1/4" Galv.	45.5"	16.0
AF102	6 42367 00730 0	1" x 2' Bury	1-1/4" Galv.	57.5"	18.5
AF103	6 42367 00731 7	1" x 3' Bury	1-1/4" Galv.	69.5"	21.0
AF104	6 42367 00732 4	1" x 4' Bury	1-1/4" Galv.	81.5"	23.5
AF105	6 42367 00733 1	1" x 5' Bury	1-1/4" Galv.	93.5"	26.0
AF106	6 42367 00734 8	1" x 6' Bury	1-1/4" Galv.	105.5"	28.5
AF107	6 42367 00735 5	1" x 7' Bury	1-1/4" Galv.	117.5"	31.0
AF108	6 42367 00736 2	1" x 8' Bury	1-1/4" Galv.	129.5"	33.5
AF110	6 42367 00737 9	1" x 10' Bury	1-1/4" Galv.	153.5"	38.5

## HIGH CAPACITY STAINLESS STEEL PIPE 1" ANY FLOW®

### FROST PROOF YARD HYDRANTS

Order No.	UPC Bar Code (Qty. 1)	Pipe Connection x Pipe Depth	Pipe Size	Overall Length	Approx. Wt./Lbs.
AFB101	6 42367 43486 1	1" x 1' Bury	1-1/4" Stainless Steel	45.5"	16.0
AFB102	6 42367 43487 8	1" x 2' Bury	1-1/4" Stainless Steel	57.5"	18.5
AFB103	6 42367 43488 5	1" x 3' Bury	1-1/4" Stainless Steel	69.5"	21.0
AFB104	6 42367 43489 2	1" x 4' Bury	1-1/4" Stainless Steel	81.5"	23.5
AFB105	6 42367 43490 8	1" x 5' Bury	1-1/4" Stainless Steel	93.5"	26.0
AFB106	6 42367 43491 5	1" x 6' Bury	1-1/4" Stainless Steel	105.5"	28.5
AFB107	6 42367 43492 2	1" x 7' Bury	1-1/4" Stainless Steel	117.5"	31.0
AFB108	6 42367 43493 9	1" x 8' Bury	1-1/4" Stainless Steel	129.5"	33.5
AFB110	6 42367 43494 6	1" x 10' Bury	1-1/4" Stainless Steel	153.5"	38.5

## NO-LEAD HIGH CAPACITY 1" ANY FLOW®

### FROST PROOF YARD HYDRANTS

Order No.	UPC Bar Code (Qty. 1)	Pipe Connection x Pipe Depth	Pipe Size	Overall Length	Approx. Wt./Lbs.
AFNL101	6 42367 42071 0	1" x 1' Bury	1-1/4" Galv.	45.5"	16.0
AFNL102	6 42367 42072 7	1" x 2' Bury	1-1/4" Galv.	57.5"	18.5
AFNL103	6 42367 42073 4	1" x 3' Bury	1-1/4" Galv.	69.5"	21.0
AFNL104	6 42367 42074 1	1" x 4' Bury	1-1/4" Galv.	81.5"	23.5
AFNL105	6 42367 42070 3	1" x 5' Bury	1-1/4" Galv.	93.5"	26.0
AFNL106	6 42367 42075 8	1" x 6' Bury	1-1/4" Galv.	105.5"	28.5
AFNL107	6 42367 42076 5	1" x 7' Bury	1-1/4" Galv.	117.5"	31.0
AFNL108	6 42367 42077 2	1" x 8' Bury	1-1/4" Galv.	129.5"	33.5
AFNL110	6 42367 42078 9	1" x 10' Bury	1-1/4" Galv.	153.5"	38.5

## NO-LEAD HIGH CAPACITY STAINLESS STEEL PIPE

### 1" ANY FLOW® FROST PROOF YARD HYDRANTS

Order No.	UPC Bar Code (Qty. 1)	Pipe Connection x Pipe Depth	Pipe Size	Overall Length	Approx. Wt./Lbs.
AFBNL101	6 42367 43495 3	1" x 1' Bury	1-1/4" Stainless Steel	45.5"	16.0
AFBNL102	6 42367 43496 0	1" x 2' Bury	1-1/4" Stainless Steel	57.5"	18.5
AFBNL103	6 42367 43497 7	1" x 3' Bury	1-1/4" Stainless Steel	69.5"	21.0
AFBNL104	6 42367 43498 4	1" x 4' Bury	1-1/4" Stainless Steel	81.5"	23.5
AFBNL105	6 42367 43499 1	1" x 5' Bury	1-1/4" Stainless Steel	93.5"	26.0
AFBNL106	6 42367 43500 4	1" x 6' Bury	1-1/4" Stainless Steel	105.5"	28.5
AFBNL107	6 42367 43501 1	1" x 7' Bury	1-1/4" Stainless Steel	117.5"	31.0
AFBNL108	6 42367 43502 8	1" x 8' Bury	1-1/4" Stainless Steel	129.5"	33.5
AFBNL110	6 42367 43503 5	1" x 10' Bury	1-1/4" Stainless Steel	153.5"	38.5



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. (For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov))



WARNING: This product meets Federal USA Drinking Water requirements but has not been specifically tested or approved as no-lead in the State of California.



Any Flow® Hydrant



Stainless Steel Any Flow® Hydrant



High Capacity Any Flow® Hydrant



No-Lead



CA. Certified



MERRILL MANUFACTURING

Lead

1

# ANY FLOW® PARTS

### PARTS KIT "AF"

Qty.	Part No.
1 Pr.	G-20
1	G-25
1	G-30
1	G-35
1	G-115
1	OR110

**ORDER NO. PKAF**  
UPC Bar Code (Qty. 1)  
6 42367 02213 6



### PARTS KIT HIGH CAPACITY MODEL

Qty.	Part No.
1 Pr.	G-20
1	G-25
1	G-30
1	G-35
1	G-116
1	OR110

**ORDER NO. PKA1F**  
UPC Bar Code (Qty. 1)  
6 42367 41865 6



### PARTS KIT "A"

Qty.	Part No.
2	G-6
4 Pr.	G-20
1	G-25
3	G-30
4	G-35
4	G-45
3	G-50
8	G-85
6 Pr.	G-105
2	G-115
4	OR110

**ORDER NO. PKA**  
UPC Bar Code (Qty. 1)  
6 42367 02212 9



### Any Flow® 3/4" Flow Rates

WATER SYSTEM PRESSURE	GALLONS PER MINUTE (GPM)										
	0	5	10	15	20	25	30	35	40	45	50
20 PSI	18 GPM @ 20 PSI										
30 PSI	21 GPM @ 30 PSI										
40 PSI	24 GPM @ 40 PSI										
60 PSI	30 GPM @ 60 PSI										
80 PSI	34 GPM @ 80 PSI										
100 PSI	40 GPM @ 100 PSI										

NOTE: Most common 1/2 hp submersible pumps output is 10GPM.

### Any Flow® 1" Flow Rates

WATER SYSTEM PRESSURE	GALLONS PER MINUTE (GPM)												
	0	5	10	15	20	25	30	35	40	45	50	55	
10 PSI	15 GPM @ 10 PSI												
20 PSI	20 GPM @ 20 PSI												
30 PSI	26 GPM @ 30 PSI												
40 PSI	32 GPM @ 40 PSI												
60 PSI	40 GPM @ 60 PSI												
80 PSI	46 GPM @ 80 PSI												
100 PSI	54 GPM @ 100 PSI												

NOTE: Most common 1/2 hp submersible pumps output is 10GPM.

### Hydrants Available with Optional No-Lead Vacuum Breakers

- BVBADNL75** 3/4" Hose  
No-Lead Brass Finish  
AUTOMATIC DRAIN - No-Lead
- BVBNL75M** 3/4" Hose  
No-Lead Brass Finish  
MANUAL DRAIN - No-Lead

**BVBADNL75**  
Code Approved and Marked  
No-Lead  
NSF  
ASSE-1011  
UPC  
CSA B64.2.2



BVBADNL75


**BVBNL75M**  
Code Approved and Marked  
No-Lead  
ASSE-1011  
UPC  
CSA B64.2.2



BVBNL75M

- Any Flow® Yard Hydrants are packaged 12 per master bundle.
- Hydrants available with optional No-Lead Bronze or Stainless Steel Hydrant Ells or Tees. Include number (i.e. **RBHENL1000**) after Order No.

- RBHENL75** No-Lead 3/4" NPT x 3/4" Plastic Pipe Elbow
- RBHENL100** No-Lead 3/4" NPT x 1" Plastic Pipe Elbow
- RBHENL1000** No-Lead 1" NPT x 1" Plastic Pipe Elbow
- SSHE75** Stainless Steel 3/4" NPT x 3/4" Plastic Pipe Elbow
- SSHE100** Stainless Steel 3/4" NPT x 1" Plastic Pipe Elbow
- RBHTNL75** No-Lead 3/4" NPT x 3/4" Plastic Pipe Tee
- RBHTNL7510** No-Lead 3/4" NPT x 1" Plastic Pipe Tee
- RBHTNL1000** No-Lead 1" NPT x 1" Plastic Pipe Tee
- SSHT75** Stainless Steel 3/4" NPT x 3/4" Plastic Pipe Tee
- SSHT7510** Stainless Steel 3/4" NPT x 1" Plastic Pipe Tee

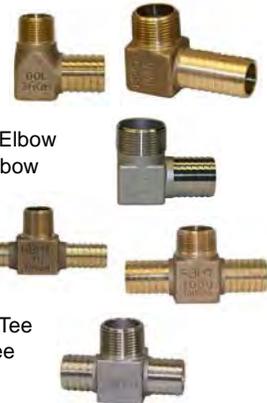


WARNING: This product can expose you to lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. (For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov))



WARNING: This product meets Federal USA Drinking Water requirements but has not been specifically tested or approved as no-lead in the State of California.



## ANY FLOW® PARTS

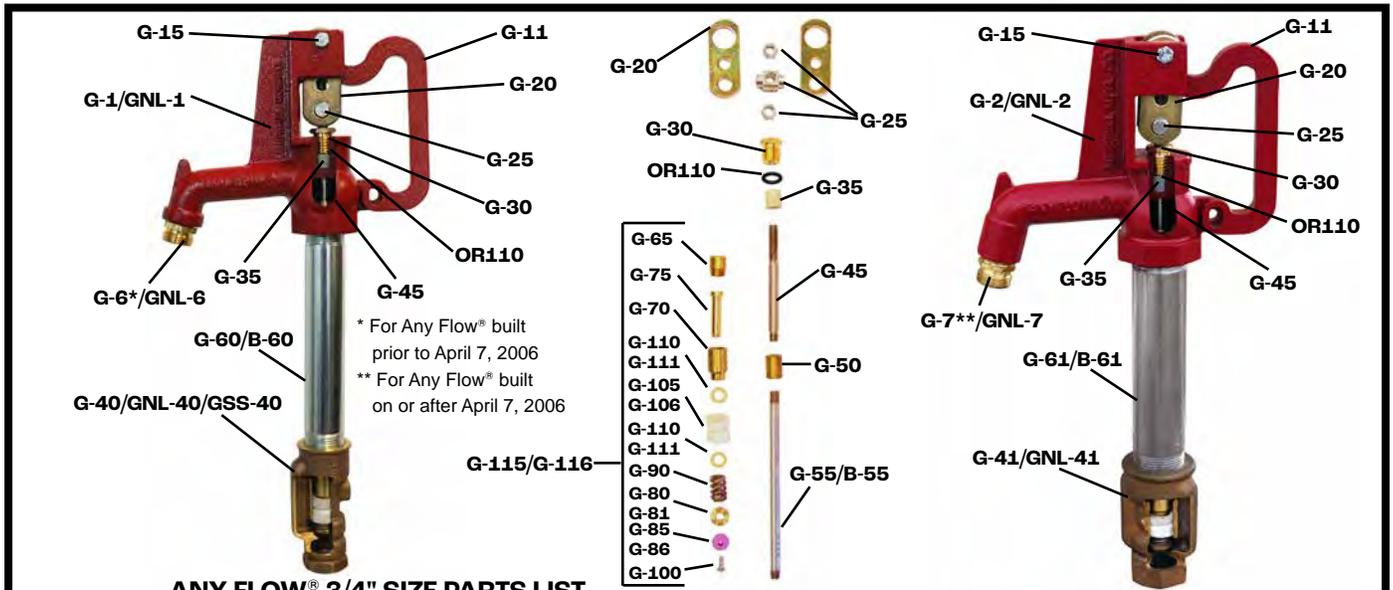

ANY FLOW® 3/4" SIZE PARTS LIST

ANY FLOW® 1" SIZE PARTS LIST

Order No.	UPC Bar Code (Qty. 1)	Part Description
<b>G-1</b>	6 42367 01493 3	Head Casting (Includes G-6 & G-35)
<b>GNL-1</b>	6 42367 42432 9	No-Lead Head Casting (Includes GNL-6 & G-35)
<b>G-6</b>	6 42367 01543 5	Hose Thread Adapter
<b>GNL-6</b>	6 42367 41048 3	No-Lead Hose Thread Adapter
<b>G-11</b>	6 42367 09313 6	Lever Casting
<b>G-15</b>	6 42367 01506 0	Lever Bolt & Nut
<b>G-20</b>	6 42367 01514 5	Draw Straps (per pair)
<b>G-25</b>	6 42367 01515 2	Pivot Connector & Nuts
<b>G-30</b>	6 42367 01522 0	Packing Nut
<b>OR110</b>	6 42367 09120 0	O-Ring
<b>G-35</b>	6 42367 01523 7	Valve Stem Packing
<b>G-40</b>	6 42367 01524 4	Valve Body
<b>GNL-40</b>	6 42367 41675 1	No-Lead Valve Body
<b>GSS-40</b>	6 42367 43695 7	No-Lead Stainless Steel Valve Body
<b>G-45</b>	6 42367 01531 2	Stainless Steel Stem
<b>G-50</b>	6 42367 01533 6	Rod Reducer
<b>G-55</b>		7/16" Galvanized Operating Rod
<b>B-55</b>		7/16" Stainless Steel Operating Rod
<b>G-60</b>		1" Galvanized Pipe
<b>B-60</b>		1" Stainless Steel Pipe
<b>G-65</b>	6 42367 01563 3	Plunger Bushing
<b>G-70</b>	6 42367 01564 0	Plunger Body
<b>G-75</b>	6 42367 01565 7	Plunger Bolt
<b>G-80</b>	6 42367 01576 3	Threaded Washer
<b>G-85</b>	6 42367 01578 7	3/8L Beveled Bibb Washer
<b>G-90</b>	6 42367 01580 0	Stainless Steel Spring
<b>G-100</b>	6 42367 01495 7	Retainer Screw
<b>G-105</b>	6 42367 01496 4	Cup Leathers (per pair)
<b>G-110</b>	6 42367 01500 8	Plunger Washer (per pair)
<b>G-115</b>	6 42367 01502 2	Plunger Assembly - Parts No. G-65, 70, 75, 80, 85, 90, 100, 105, 110
<b>G-120</b>	6 42367 01504 6	Head Assembly - Parts No. G-1, 6, 11, 15, 20, 25, 30, 35, 45, 50, OR110
<b>GNL-120</b>	6 42367 42433 6	No-Lead Head Assembly - Parts No. GNL-1, GNL-6, G-11, 15, 20, 25, 30, 35, 45, 50, OR110
<b>A-250</b>	6 42367 07720 4	Container of Silicone Lube

Order No.	UPC Bar Code (Qty. 1)	Part Description
<b>G-2</b>	6 42367 01513 8	Head Casting (Includes G-7 & G-35)
<b>GNL-2</b>	6 42367 42434 3	No-Lead Head Casting (Includes GNL-7 & G-35)
<b>G-7</b>	6 42367 10992 9	Hose Thread Adapter**
<b>GNL-7</b>	6 42367 41985 1	No-Lead Thread Adapter
<b>G-11</b>	6 42367 09313 6	Lever Casting
<b>G-15</b>	6 42367 01506 0	Lever Bolt & Nut
<b>G-20</b>	6 42367 01514 5	Draw Straps (per pair)
<b>G-25</b>	6 42367 01515 2	Pivot Connector & Nuts
<b>G-30</b>	6 42367 01522 0	Packing Nut
<b>OR110</b>	6 42367 09120 0	O-Ring
<b>G-35</b>	6 42367 01523 7	Valve Stem Packing
<b>G-41</b>	6 42367 01527 5	Valve Body
<b>GNL-41</b>	6 42367 42079 6	No-Lead Valve Body
<b>G-45</b>	6 42367 01531 2	Stainless Steel Stem
<b>G-50</b>	6 42367 01533 6	Rod Reducer
<b>G-55</b>		7/16" Galvanized Operating Rod
<b>B-55</b>		7/16" Stainless Steel Operating Rod
<b>G-61</b>		1-1/4" Galvanized Pipe
<b>B-61</b>		1-1/4" Stainless Steel Pipe
<b>G-65</b>	6 42367 01563 3	Plunger Bushing
<b>G-70</b>	6 42367 01564 0	Plunger Body
<b>G-75</b>	6 42367 01565 7	Plunger Bolt
<b>G-81</b>	6 42367 01577 0	Threaded Washer
<b>G-86</b>	6 42367 01579 4	3/4 Beveled Bibb Washer
<b>G-90</b>	6 42367 01580 0	Stainless Steel Spring
<b>G-100</b>	6 42367 01495 7	Retainer Screw
<b>G-106</b>	6 42367 01498 8	Cup Leathers (per pair)
<b>G-111</b>	6 42367 01501 5	Plunger Washer (per pair)
<b>G-116</b>	6 42367 01503 9	Plunger Assembly - Parts No. G-65, 70, 75, 81, 86, 90, 100, 106, 111
<b>G-121</b>	6 42367 01505 3	Head Assembly - Parts No. G-2, 6, 11, 15, 20, 25, 30, 35, 45, 50, OR110
<b>GNL-121</b>	6 42367 42435 0	No-Lead Head Assembly - Parts No. GNL-2, GNL-7, G-11, 15, 20, 25, 30, 35, 45, 50, OR110
<b>A-250</b>	6 42367 07720 4	Container of Silicone Lube



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. (For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov))



WARNING: This product meets Federal USA Drinking Water requirements but has not been specifically tested or approved as no-lead in the State of California.