


dahl-ECO mini-ball™ Valve

Lead-free Compliant- Plumbing

TDS - 391-LF
New June/14

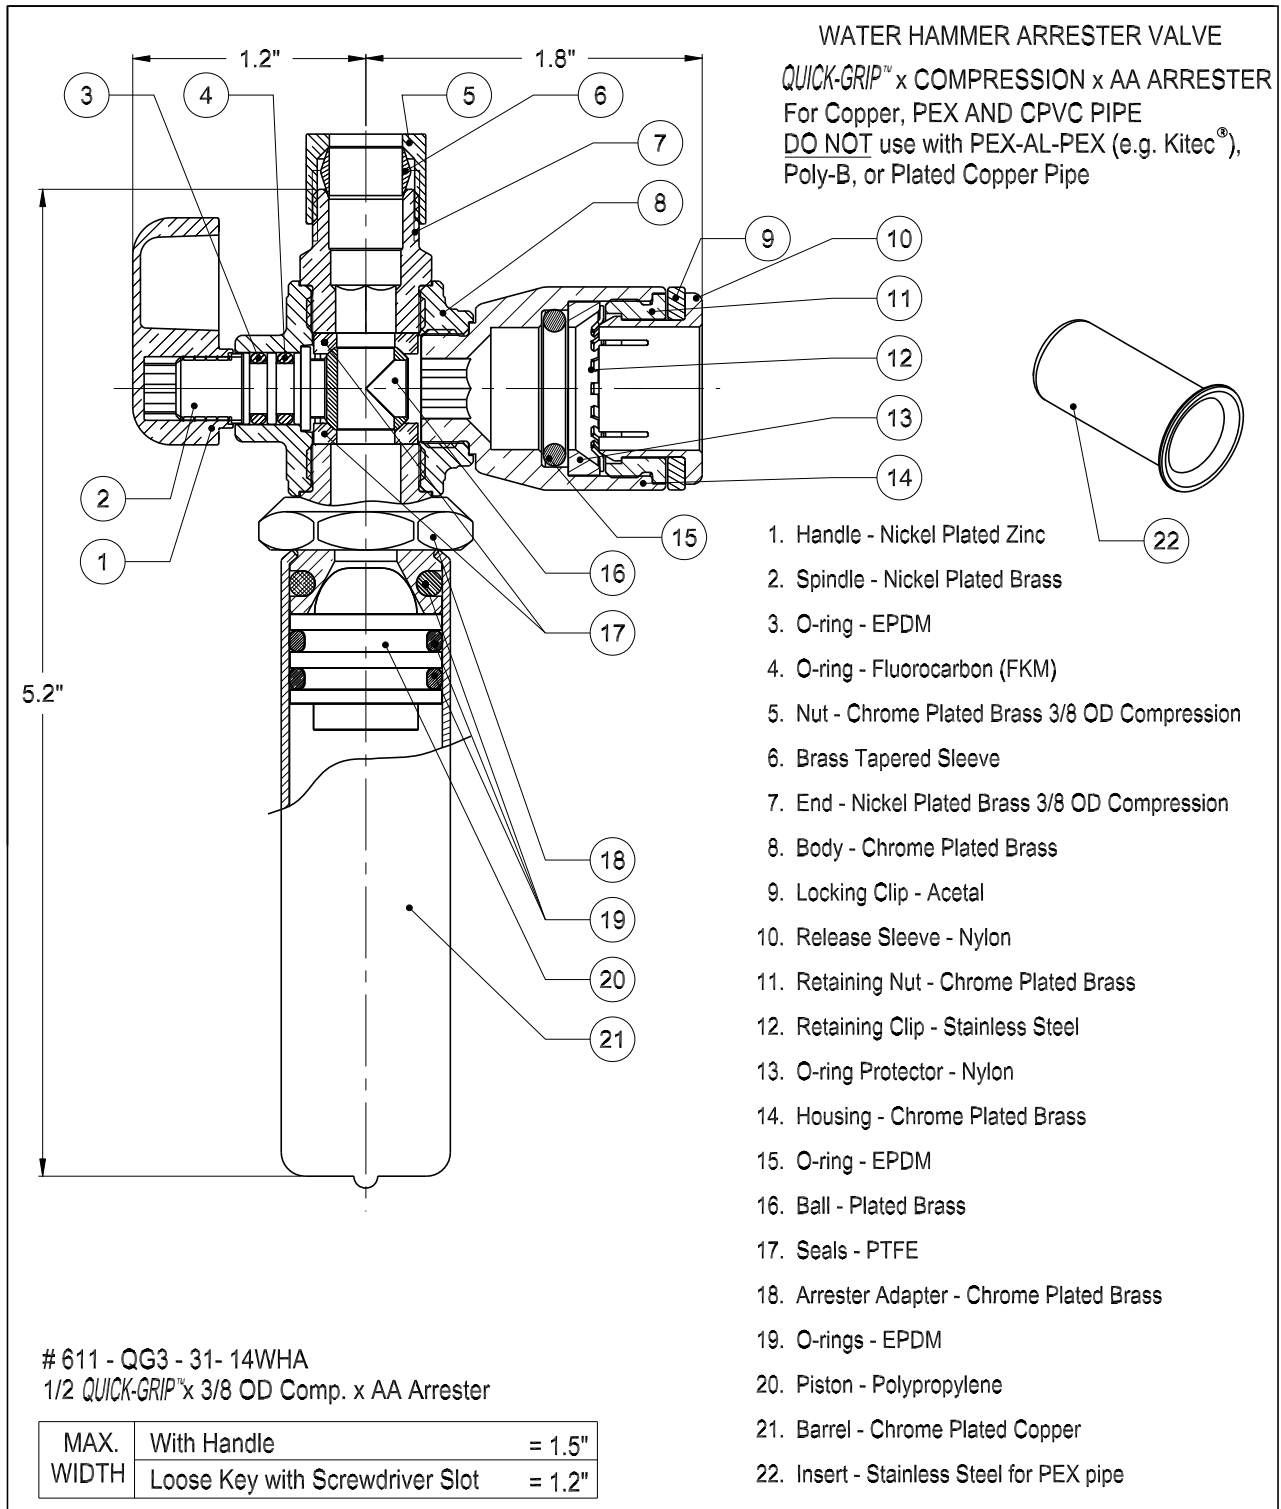

Working Pressure/Temperature: Up to 125 PSI / 180°F depending on pipe material.

 , UPC®
NSF / ANSI 61-G
ASSE 1061

Designed and Manufactured in Canada

AA Sized Water Hammer Arrester - ASSE 1010 Listed

Wetted surface area contains <0.1wt% weighted average lead.

Also available: Loose Key with Screwdriver Slot operation



dahl brothers canada limited

2600 S. SHERIDAN WAY, MISSISSAUGA, ON, CANADA L5J 2M4
905-822-2330 CAN 800-268-5355 U.S. 800-268-2363
FAX(905) 855-1450, USA AND CANADA 800-226-1801
sales@dahlvalve.com www.dahlvalve.com