



GAS-FLO STAINLESS STEEL GAS CONNECTORS (ACM)

(Movable) FOR COMMERCIAL APPLIANCES

Applications:

Gas appliance Connectors for a wide variety of gas applications.

A.N.S.I. Z21.69 - C.S.A. 6.16 "Connectors for Movable Gas Appliances"

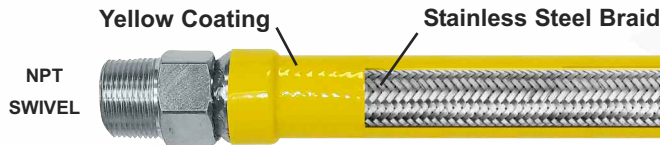

-QD Option (Coupler & Nipple)



• Comes complete with two 90° elbows for proper installation.

GAS-FLO by Fairview

ACM Series Gas Appliance Connector BTU Capacity (Flow capacities are based on 0.64 specific gravity @ 0.5" w.c. pressure drop)				
Series	36"	48"	60"	72"
ACM-50	125,000	106,000	95,000	86,000
ACM-75	250,000	215,000	200,000	174,000
ACM-100	515,000	443,000	395,000	348,000
ACM-125	945,000	818,000	735,000	634,000
ACM-50-QD	75,000	70,000	65,000	55,000
ACM-75-QD	220,000	180,000	160,000	140,000
ACM-100-QD	380,000	335,000	290,000	280,000
ACM-125-QD	620,000	540,000	475,000	420,000


1/2 MNPT X 1/2 MNPT			1 MNPT X 1 MNPT		
PART No.	Length (IN.)	Q.D.	PART No.	Length (IN.)	Q.D.
ACM-50-GAS-SP24	24	NO	ACM-100-GAS-SP36	36	NO
ACM-50-GAS-SP36	36	NO	ACM-100-GAS-SPQD36	36	YES
ACM-50-GAS-SPQD36	36	YES	ACM-100-GAS-SP48	48	NO
ACM-50-GAS-SP48	48	NO	ACM-100-GAS-SPQD48	48	YES
ACM-50-GAS-SPQD48	48	YES	ACM-100-GAS-SP60	60	NO
ACM-50-GAS-SP60	60	NO	ACM-100-GAS-SPQD60	60	YES
ACM-50-GAS-SPQD60	60	YES	ACM-100-GAS-SP72	72	NO
ACM-50-GAS-SP72	72	NO	ACM-100-GAS-SPQD72	72	YES
ACM-50-GAS-SPQD72	72	YES			
3/4 MNPT X 3/4 MNPT			1-1/4 MNPT X 1-1/4 MNPT		
PART No.	Length (IN.)	Q.D.	PART No.	Length (IN.)	Q.D.
ACM-75-GAS-SP24	24	NO	ACM-125-GAS-SP36	36	NO
ACM-75-GAS-SPQD24	24	YES	ACM-125-GAS-SPQD36	36	YES
ACM-75-GAS-SP36	36	NO	ACM-125-GAS-SP48	48	NO
ACM-75-GAS-SPQD36	36	YES	ACM-125-GAS-SPQD48	48	YES
ACM-75-GAS-SP48	48	NO	ACM-125-GAS-SP60	60	NO
ACM-75-GAS-SPQD48	48	YES	ACM-125-GAS-SPQD60	60	YES
ACM-75-GAS-SP60	60	NO	ACM-125-GAS-SP72	72	NO
ACM-75-GAS-SPQD60	60	YES			
ACM-75-GAS-SP72	72	NO			
ACM-75-GAS-SPQD72	72	YES			

TO BE INSTALLED BY LICENSED GAS FITTERS ONLY.

GAS-FLO STAINLESS STEEL GAS CONNECTORS KIT

A.N.S.I. Z21.69 - C.S.A. 6.16 "Connectors for Movable Gas Appliances"

For Quick Disconnect Specifications SEE OUR CATALOG




Gas Swivel Link
NPT SWIVEL



Gas Nipple Swivel
NPT SWIVEL



NATIONAL
SANITATION
FOUNDATION



RIGHT
NPT
SWIVEL



PART No.	Description	Length In (FT.)
ACM-50KIT-36	1/2" Appliance Connector Kit	3
ACM-50KIT-48	Kit Includes : (1) Forged Gas Ball Valve, (1) Restraining Cable,	4
ACM-50KIT-60	(1) Quick Disconnect Coupler & Nipple, (2) 90° Black Iron Elbows,	5
ACM-50KIT-72	(2) Black Iron Nipples	6
ACM-75KIT-36	3/4" Appliance Connector Kit	3
ACM-75KIT-48	Kit Includes : (1) Forged Gas Ball Valve, (1) Restraining Cable,	4
ACM-75KIT-60	(1) Quick Disconnect Coupler & Nipple, (2) 90° Black Iron Elbows,	5
ACM-75KIT-72	(2) Black Iron Nipples	6
ACM-100KIT-36	1" Appliance Connector Kit	3
ACM-100KIT-48	Kit Includes : (1) Forged Gas Ball Valve, (1) Restraining Cable,	4
ACM-100KIT-60	(1) Quick Disconnect Coupler & Nipple, (2) 90° Black Iron Elbows,	5
ACM-100KIT-72	(2) Black Iron Nipples	6

ACCESSORIES AVAILABLE

QD Valved Coupler

PART No.	Pipe / QD Body
ACM-BVQD-50	1/2
ACM-BVQD-75	3/4

360 Degree Swivel

PART No.	Pipe Swivel
ACM-AS-50	1/2
ACM-AS-75	3/4
ACM-AS-100	1

Gas Nipple Swivel

PART No.	Pipe Swivel
ACM-50-GMNSL	1/2
ACM-75-GMNSL	3/4
ACM-100-GMNSL	1

KITS CONTAIN

Gas Swivel Link



Reduces hose stress without restricting flow.

Safety Cables



PART No.	Length In (IN.)
ACM-GAS-RCP-22	22
ACM-GAS-RCP-34	34
ACM-GAS-RCP-36	36
ACM-GAS-RCP-46	46
ACM-GAS-RCP-58	58

STAINLESS STEEL SAFETY CABLES ARE RECOMMENDED FOR USE ON CASTOR MOUNTED EQUIPMENT TO LIMIT THEIR MOBILITY.

TO BE INSTALLED BY LICENSED GAS FITTERS ONLY.