



SUBMITTAL INFORMATION

Brass Saddles - (202BSD-xxx-TAP style)



202BSD DUAL BAND BRASS SADDLES FOR DUCTILE IRON OR A/C PIPE

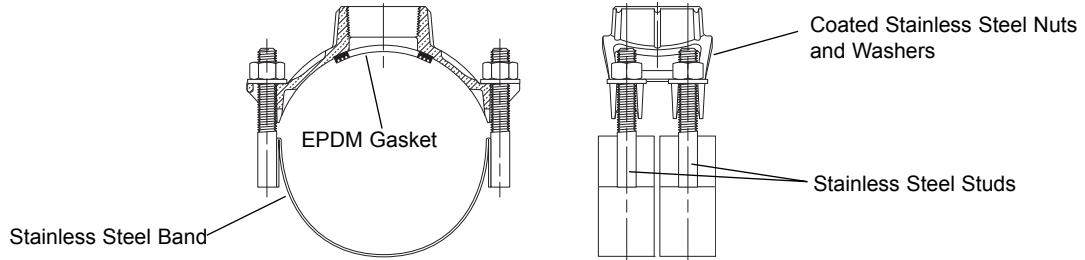

| NOM. PIPE SIZE | O.D. RANGE | APPROX. WT. LBS. | CATALOG NUMBER | SUBMITTED ITEM(S) |
|----------------|---------------|------------------|-----------------|-------------------|
| 4" | 4.80 - 5.40 | 6.6 | 202BSD-540-Tap | |
| | 4.80 - 5.10 | 7.3 | *202BSD-510-Tap | |
| | 5.10 - 5.40 | 7.3 | *202BSD-540-Tap | |
| **6" | 6.63 | 7.2 | 202BSD-663-Tap | |
| 6" | 6.90 - 7.50 | 7.7 | 202BSD-750-Tap | |
| ** 8" | 8.63 - 9.05 | 8.6 | 202BSD-905-Tap | |
| 8" | 9.05 - 9.62 | 8.8 | 202BSD-962-Tap | |
| ** 10" | 10.75 | 9.0 | 202BSD-1075-Tap | |
| 10" | 11.10 - 12.12 | 10.7 | 202BSD-1212-Tap | |
| ** 12" | 12.75 | 10.8 | 202BSD-1275-Tap | |
| 12" | 13.20 - 14.38 | 11.8 | 202BSD-1438-Tap | |
| 14" | 15.30 - 16.25 | 18.0 | 202BSD-1625-Tap | |
| | 16.30 - 17.25 | 19.1 | 202BSD-1725-Tap | |
| 16" | 17.40 - 18.40 | 23.0 | 202BSD-1840-Tap | |
| | 18.50 - 19.25 | 24.0 | 202BSD-1925-Tap | |
| 18" | 19.50 - 20.50 | 25.0 | 202BSD-2050-Tap | |
| 20" | 21.20 - 22.20 | 25.5 | 202BSD-2220-Tap | |
| | 22.50 - 23.50 | 25.7 | 202BSD-2350-Tap | |
| 24" | 23.80 - 24.80 | 26.0 | 202BSD-2480-Tap | |
| | 25.60 - 26.50 | 26.5 | 202BSD-2650-Tap | |
| 30" | 31.74 - 32.74 | 27.0 | 202BSD-3274-Tap | |

* These 4" saddles have a limited range and are for 2" taps only. For all other tap sizes use the standard 4.80 - 5.40 range.

** Only available with 3/4" and 1" taps

OUTLET TAP CODE

| CC (AWWA) THREAD | | IP THREAD | | ✓ SUBMITTED ITEM(S) |
|------------------|-------------|-----------|-------------|---------------------|
| THREAD | CODE NUMBER | THREAD | CODE NUMBER | |
| 3/4" CC | CC3 | 3/4" IP | IP3 | |
| 1" CC | CC4 | 1" IP | IP4 | |
| 1-1/4" CC | Δ CC5 | 1-1/4" IP | Δ IP5 | |
| 1-1/2" CC | CC6 | 1-1/2" IP | IP6 | |
| 2" CC | CC7 | 2" IP | IP7 | |

Δ Contact factory for availability

To Order: Select the catalog number for the desired pipe range and complete the catalog number by adding the outlet thread tap code.
Example: A dual band saddle for 6.90 D.I. pipe with a 3/4" CC thread would be 202BSD-750-CC3.

FEATURES

- All brass conforms to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS NO C83600 - 85-5-5-5)
- Bands and 5/8" UNC threaded studs are made of 18-8 type 304 stainless steel. Welds are fully passivated for corrosion resistance
- Gasket is EPDM rubber ASTM D2000
- Stainless steel nuts are coated to prevent galling

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

07/14/14

Submitted By: