



THERMOPLASTIC BASE NO-CALK® ROOF FLASHINGS TECHNICAL SPECIFICATION

Job Name	_____	Item #	_____
Location	_____		
Engineer	_____	Contractor	_____
PO #	_____	Tag	_____
Representative	_____		

SPECIFICATIONS

Oatey Thermoplastic No-Calk® Roof Flashings can be used in commercial and residential applications where a watertight seal for roof penetrations around the plumbing vent pipe is required.

APPROVALS AND LISTINGS



IAPMO Listed



DESCRIPTION

All dimensions in inches.

- Roof Flashing slides over vent pipe for pitch to 45°.
- Non-fading, non-cracking rigid black thermoplastic base.
- Non-fading sealing collar.
- Approved for Type B installations.
- Not for hot-mopped or built-up roofs.
- Do not use paint or petroleum based products on plastic bases or rubber collars.

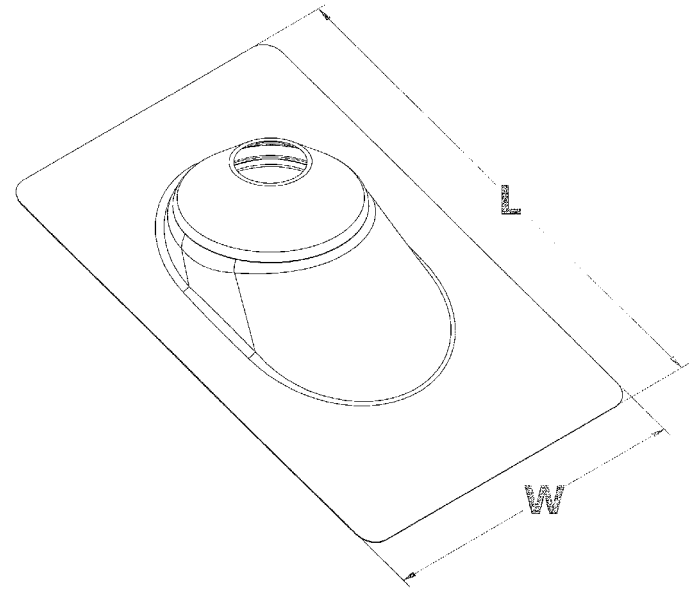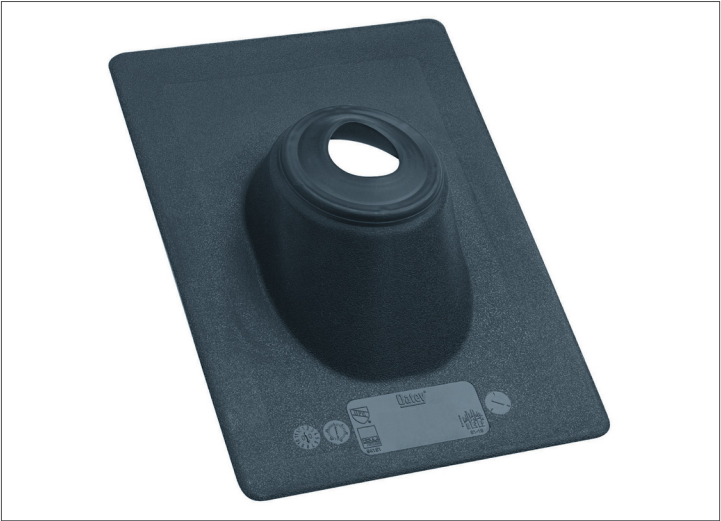

PRODUCT SELECTOR

THERMOPLASTIC BASE NO-CALK® ROOF FLASHINGS							
✓	Product Number	Description	Length (L)	Width (W)	Pack	Carton Weight	
	48100	1.25" - 1.5" Black Thermoplastic No-Calk Roof Flashing	14"	16"	12	9 lbs.	4.0 kg.
	48101	2" Black Thermoplastic No-Calk Roof Flashing	14"	16"	12	9 lbs.	4.0 kg.
	48102	3" Black Thermoplastic No-Calk Roof Flashing	14"	16"	12	10 lbs.	4.5 kg.
	48103	4" Black Thermoplastic No-Calk Roof Flashing	14"	16"	12	12 lbs.	5.4 kg.
	481051	1.5" - 3" Black Thermoplastic No-Calk Roof Flashing	14"	16"	6	5 lbs.	2.3 kg.
	481061	3 - 4" Black Thermoplastic No-Calk Roof Flashing	14"	16"	6	7 lbs.	3.2 kg.

Data is subject to manufacturing tolerances.