


Page 1 of 2	Fastenal Product Standard	REV-04
Date: July 7, 2022	FASTENAL	LW.SS

Lock Washer, Regular Split, 18-8 Stainless Steel

This product standard contains the required dimensional, mechanical, performance, and chemical characteristics of the products shown in this purchase order (as applicable to the product). Unless specified below, current revisions of national or international standards shall be applicable as of the date of Fastenal's purchase order and must be adhered to in their entirety. If the order received does not meet these requirements, corrective action may be issued which could jeopardize your status as an approved supplier to Fastenal.

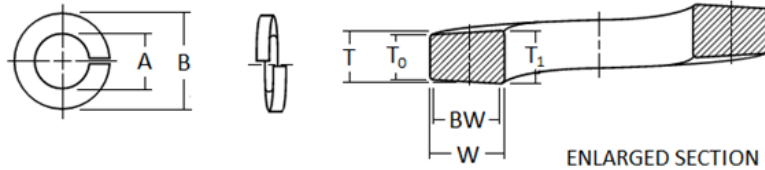

Nominal Washer Size	A		B	T	W	BW
	Inside Diameter		Outside Diameter	Mean Section Thickness $(t_1 + T_0)/2$	Section Width	Bearing Width
	Max.	Min.	Max.	Min.	Min.	Min.
#0	.069	.063	.130	.015	.026	.016
#2	.094	.088	.172	.020	.035	.024
#3	.107	.101	.195	.025	.040	.028
#4	.120	.114	.209	.025	.040	.028
#5	.133	.127	.236	.031	.047	.033
#6	.148	.141	.250	.031	.047	.033
#8	.174	.167	.293	.040	.055	.038
#10	.200	.193	.334	.047	.062	.043
#12	.227	.220	.377	.056	.070	.049
1/4	.260	.252	.487	.062	.109	.076
5/16	.322	.314	.583	.078	.125	.087
3/8	.385	.377	.680	.094	.141	.099
7/16	.450	.440	.776	.109	.156	.109
1/2	.512	.502	.869	.125	.171	.120
9/16	.574	.564	.965	.141	.188	.132
5/8	.641	.628	1.073	.156	.203	.142
3/4	.766	.753	1.265	.188	.234	.164
7/8	.894	.878	1.459	.219	.266	.186
1	1.024	1.003	1.656	.250	.297	.208
1-1/8	1.153	1.129	1.847	.281	.328	.230
1-1/4	1.280	1.254	2.036	.312	.359	.251
1-3/8	1.408	1.379	2.219	.344	.391	.274
1-1/2	1.534	1.504	2.419	.375	.422	.295
1-5/8	1.663	1.633	2.553	.389	.424	.297
1-3/4	1.789	1.758	2.679	.389	.424	.297
1-7/8	1.914	1.883	2.811	.422	.427	.299
2	2.039	2.008	2.936	.422	.427	.299
2-1/4	2.293	2.262	3.221	.440	.442	.309
2-1/2	2.543	2.512	3.471	.440	.442	.309
2-3/4	2.793	2.762	3.824	.458	.491	.344
3	3.043	3.012	4.074	.458	.491	.344

RECORD OF REVISION CHANGES TO THIS DOCUMENT ARE LOCATED ON THE LAST PAGE

Page 2 of 2	Fastenal Product Standard	REV-04
Date: July 7, 2022	FASTENAL	LW.SS

Specification Requirements:

- Dimensions: ASME B18.21.1, **Exception: Size #0 see dimensions above
- Material: 18-8 Stainless Steel meeting the following chemical composition %: C: 0.10 (Max.), Mn 2.00 (Max.), Cr 16.0 - 20.0, Ni 8.0 - 19.0
- Mechanical: Sizes \leq 5/8: HRC 35 – 43
Sizes \geq 3/4: HRC 32 – 43
- Finish: ASTM A380/A380M

Revision Level Changes to this Document

Document Name	Revision Level	Revision Date	Rationale for Revision
LW.SS	02	1/11/2018	Added size to the table. Added A380M to the finish specification.
LW.SS	03	1/29/2019	Revised medium to regular.
LW.SS	04	7/7/2022	Added chemical composition.

The rationale above may not include all of the changes within each revision. A complete review of the Fastenal Product Standard is required.