

Eccentric Plug Valve

Flo-E-Centric®


Model 54-B



Flomatic Corporation

Sizes 2"/ 50mm
Bare Stem

Materials

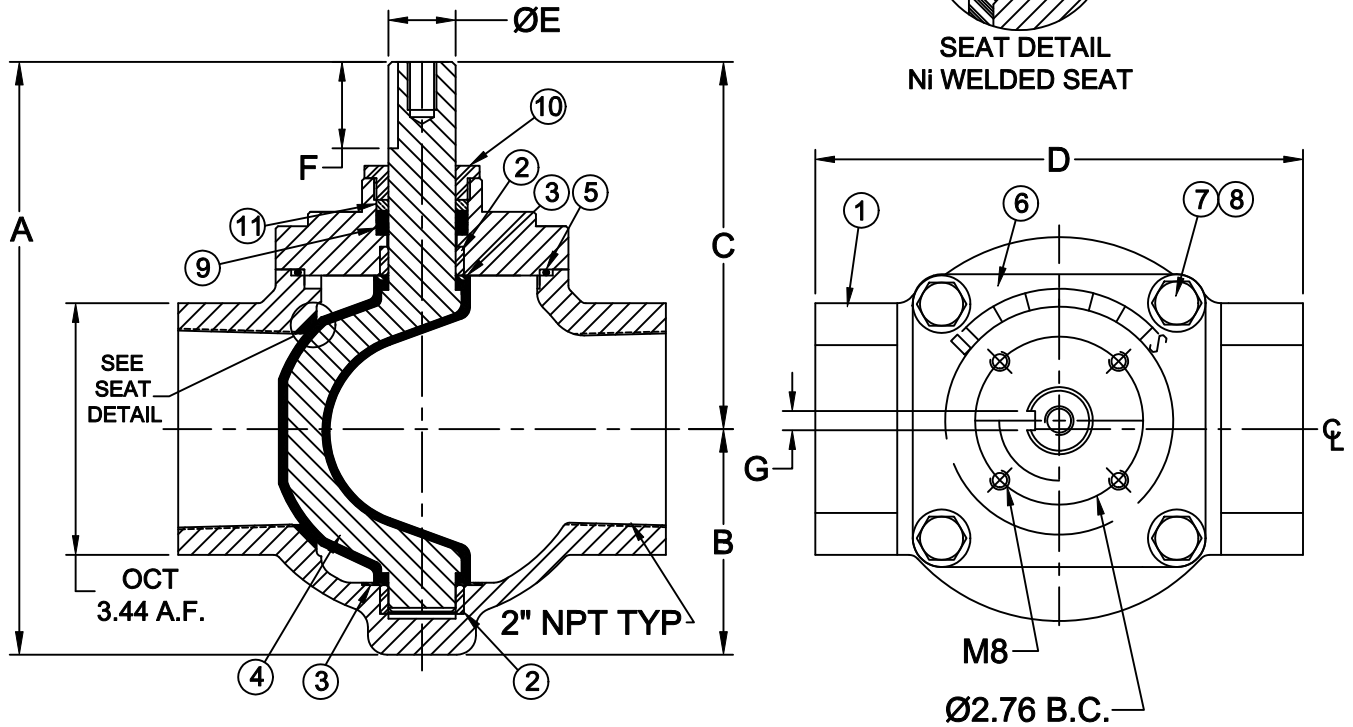

Max Temp 180°F (82°C)
Max Pressure 200 psi (14 bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body	Ductile Iron	A536 (65-45-12)	7	4	Bolt	Stainless Steel	304
2	2	Bushing	Stainless Steel	316	8	4	Washer	Stainless Steel	304
3	2	Washer	PTFE	---	9	5	V-Packing	NBR	---
4	1	Plug	Ductile Iron/NBR	A536 (65-45-12)	10	1	Packing Washer	Carbon Steel	1045, Cr Plated
5	1	O-Ring	EPDM	---	11	1	Washer	Brass	B16
6	1	Bonnet	Ductile Iron	A536 (65-45-12)					

Dimensions (NPT ANSI B1.20.1 threads)

Valve Size		Part #	A		B		C		D		ØE		F (Key)		G (Key)		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs	kg
2	50	54200004B	8.00	204	3.00	76	5.00	127	6.25	159	.87	22	1.14	29	.31	8	15	7

MANUFACTURED IN COMPLIANCE WITH AWWA C517 STANDARD

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2015 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.



September 17, 2015
Dwg No: SPLUG_BARE_NPT Rev: 0

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798