



ProMax[®] ELECTRIC

TALL AND SHORT MODELS AVAILABLE

DYNACLEAN™ DIFFUSER DIP TUBE

Helps reduce lime and sediment buildup, maximizes hot water output. Made from long-lasting PEX cross-linked polymer.

COREGARD™ ANODE ROD

A. O. Smith's exclusive anode has a stainless steel core, protects tank against corrosion.

DURABLE, TAMPER-RESISTANT BRASS DRAIN VALVE

PERMAGLAS® GLASS COATING

Protects steel tank from corrosion and maximizes tank life.


CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

CODES AND STANDARDS

Certain ProMax Electric models meet the requirements of the BC Energy Efficiency Act. See table on reverse for more details.

8-YEAR LIMITED TANK AND 6-YEAR PARTS WARRANTY

For complete information, consult written warranty or A. O. Smith Water Products Company.

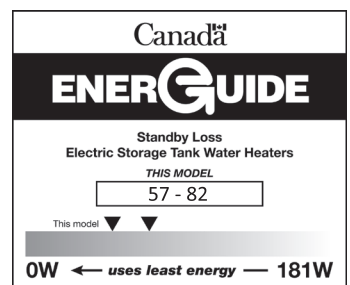





Residential Electric Water Heaters

ProMax[®] ELECTRIC

CAPACITY & DIMENSIONS

MODEL NUMBER	SERIES	CAPACITY GALLON	ELEMENT WATTAGE		FIRST HOUR RATING GALLONS	STANDBY LOSS WATTS	DIMENSIONS IN INCHES		APPROX. SHIPPING WEIGHT (LBS.)	BC COMPLIANT
			WATTS	VOLTS			(A) HEIGHT	(B) DIAMETER		
TOP ENTRY										
EPSX 50	200	50	3000	208	60	57	48-3/4	22	129	√
EPSX 50	200	50	3000	240	60	57	48-3/4	22	129	√
ECS 50	210	50	3000	208	60	66	48	21-1/2	116	-
ECS 50	210	50	3000	240	60	66	48	21-1/2	116	-
ECS 50	210	50	3800	240	60	66	48	21-1/2	116	-
EPSX 50	200	50	4500	208	60	57	48-3/4	22	129	√
EPSX 50	200	50	4500	240	60	57	48-3/4	22	129	√
ECS 50	210	50	4500	208	60	66	48	21-1/2	116	-
ECS 50	210	50	4500	240	60	66	48	21-1/2	116	-
EPSX 50	200	50	6000	208	60	57	48-3/4	22	129	√
EPSX 50	200	50	6000	240	60	57	48-3/4	22	129	√
ECS 50	210	50	6000	208	60	66	48	21-1/2	116	-
ECS 50	210	50	6000	240	60	66	48	21-1/2	116	-
ECT 80	200	80	3000	208	81	78	60-1/2	24	180	√
ECT 80	200	80	3000	240	81	78	60-1/2	24	180	√
ECT 80	200	80	3800	240	81	78	60-1/2	24	180	√
ECT 80	200	80	4500	208	81	78	60-1/2	24	180	√
ECT 80	200	80	4500	240	81	78	60-1/2	24	180	√
ECT 80	200	80	6000	208	81	78	60-1/2	24	180	√
ECT 80	200	80	6000	240	81	78	60-1/2	24	180	√
BOTTOM ENTRY										
EJSH 50	100	50	3000	240	60	66	48	22	123	√
EJSH 50	100	50	4500	208	60	66	48	22	123	√
EJTH 80	100	80	4500	208	81	82	60-1/2	24	208	√
EJTH 80	100	80	4500	240	81	82	60-1/2	24	208	√

Recovery capacity based on actual performance tests.

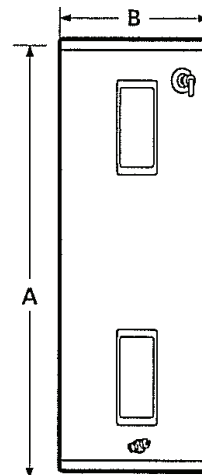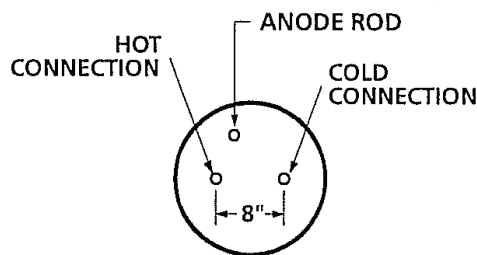

For Technical Information, call 1-888-479-8324. A. O. Smith reserves the right to make product changes or improvements without prior notice.