



# FIX-IT FLANGE REPAIR RING TECHNICAL SPECIFICATION

|                      |                  |
|----------------------|------------------|
| Job Name _____       | Item # _____     |
| Location _____       |                  |
| Engineer _____       | Contractor _____ |
| PO # _____           | Tag _____        |
| Representative _____ |                  |

## SPECIFICATIONS

The Oatey Fix-it Flange Repair Ring repairs broken, cracked or worn out toilet mounting flanges. It shall include 10 mounting holes for installation versatility, two bolt slots and four slotted mounting tabs that allow for angled screw installs.

The universal design shall fit all flange and toilet installations and work with a wide range of flooring types, including concrete. The mounting tabs shall fit all toilet styles and accommodate 1/4 in. or 5/16 in. closet bolts.

## FEATURES & MATERIALS




|          |               |
|----------|---------------|
| Material | Painted Steel |
|----------|---------------|

## DIMENSIONS

|      |               |       |      |                |       |
|------|---------------|-------|------|----------------|-------|
| [A]: | Flange Length | 7.00" | [C]: | Flange Height  | 0.15" |
| [B]: | Flange Width  | 6.14" | [D]: | Inner Diameter | 5.13" |

## PRODUCT SELECTOR

| FIX IT FLANGE |                |               |           |
|---------------|----------------|---------------|-----------|
| ✓             | Product Number | Description   | Ctn. Qty. |
|               | 42775C         | Fix It Flange | 10        |

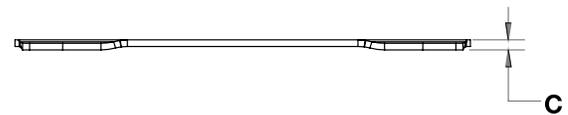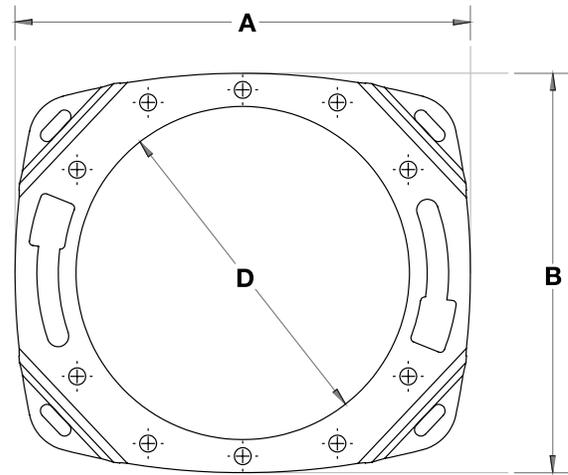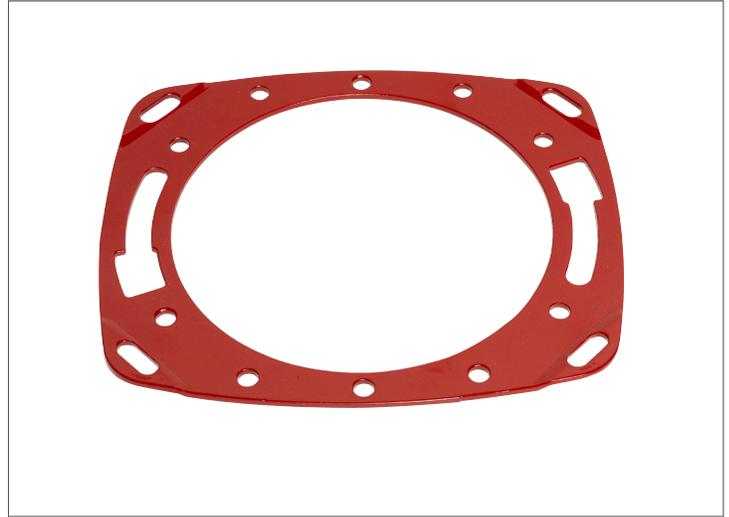

Access BIM/Revit content through [www.oatey.com](http://www.oatey.com)