


CHROME ANGLE SUPPLY VALVES

List of Materials

#	Part	Material
1	Body	C46500
2	Bonnet	C46500
3	Ball	C46500
4	Seat	PTFE
5	Stem	C46500
6	O-Ring	EPDM
7	Handle	ABS
8	Screw	SS304
9	Comp.Ring	H65 Brass
10	Nut	C37700

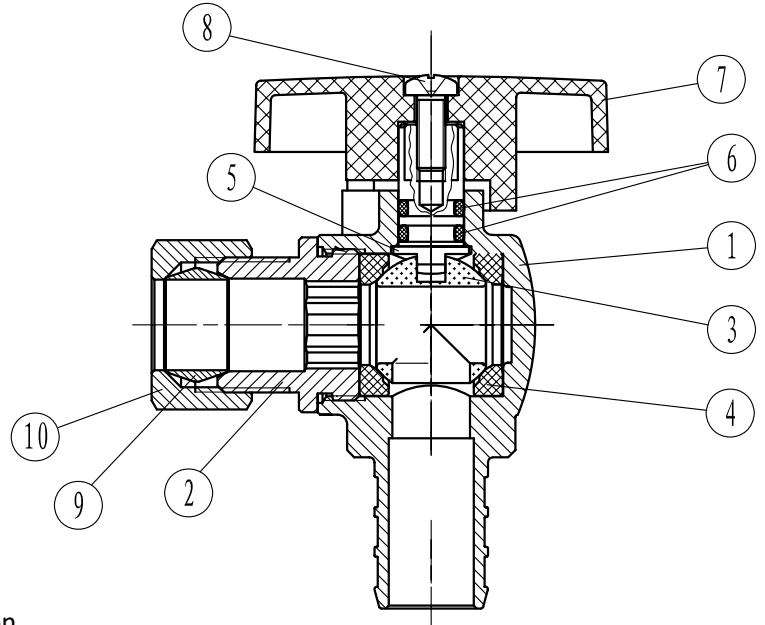


Specifications for Valves


- Forged brass with chrome plated body
- Quarter turn open & shut
- Self-lubricating P.T.F.E. seats
- Double O-ring for more safety
- Suitable for both plumbing and hydronic heating application
- Complies with: ASME A112.18.1, CSA B125.1-11, F1807, F1960, ANSI/NSF 61, ANSI/NSF 372, ANSI/NSF 14

Certified by


IAPMO (cUPC)

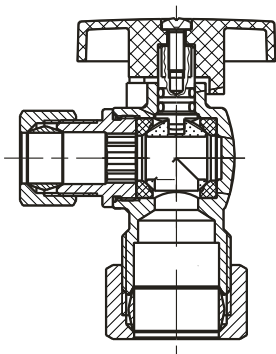


09689 5/8" O.D. x 3/8" O.D.




09639	1/2" PEX x 3/8" O.D.
09636	1/2" PEX x 1/4" O.D.




09629 1/2" EXP. x 3/8" O.D.



09615	3/8" FIPS x 3/8" O.D.
09617	1/2" FIPS x 3/8" O.D.



09619 1/2" COP x 3/8" O.D.



38989 1/2" P.F. x 3/8" O.D.




Vancouver ~ Toronto ~ Montreal ~ Cincinnati


www.bmicanada.com

1-800-361-1452

1-800-561-8579




CHROME ANGLE SUPPLY VALVES




38909

1/2" P.F. x P.F.

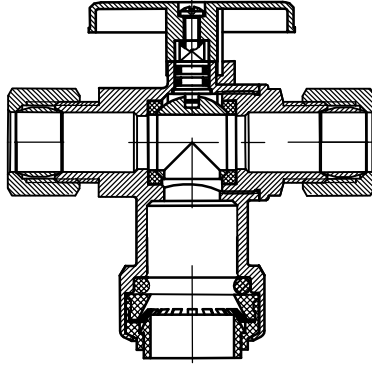


38919

1/2" P.F. x 3/8" O.D.(2x)



09644


1/2" CPVC x 3/8" O.D.



CHROME STRAIGHT SUPPLY VALVES

List of Materials

#	Part	Material
1	Body	C46500
2	Bonnet	C46500
3	Ball	C46500
4	Seat	PTFE
5	Stem	C46500
6	O-Ring	EPDM
7	Handle	ABS
8	Screw	SS304
9	Comp.Ring	Brass
10	Nut	C37700

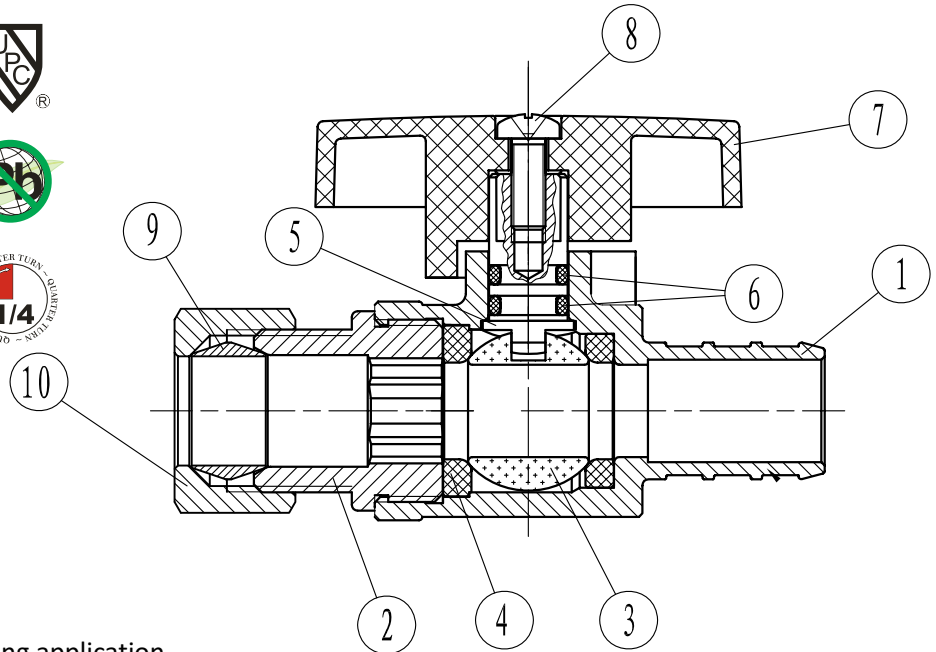


Specifications for Valves


- Forged brass with chrome plated body
- Quarter turn open & shut
- Self-lubricating P.T.F.E. seats
- Double O-ring for more safety
- Suitable for both plumbing and hydronic heating application
- Complies with: ASME A112.18.1, CSA B125.1-11, F1807, F1960, ANSI/NSF 61, ANSI/NSF 372, ANSI/NSF 14

Certified by

IAPMO (cUPC)




09684 5/8" O.D. x 3/8" O.D.




09634 1/2" PEX x 3/8" O.D.

09637 1/2" PEX x 1/4" O.D.

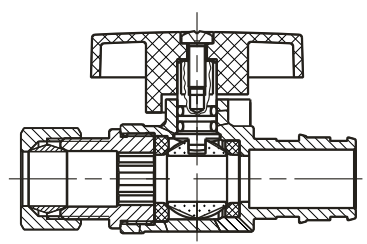


09624 1/2" EXP. x 3/8" O.D.




09610 3/8" FIPS x 3/8" O.D.

09612 1/2" FIPS x 3/8" O.D.



09614 1/2" COP x 3/8" O.D.

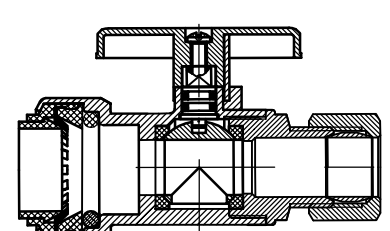

38984 1/2" P.F. x 3/8" O.D.




Vancouver ~ Toronto ~ Montreal ~ Cincinnati


www.bmicanada.com

1-800-361-1452


1-800-561-8579




CHROME STRAIGHT SUPPLY VALVES




09604	1/2" PEX x PEX
09605	3/4" PEX x PEX

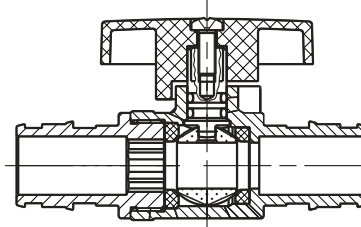


09104	1/2" EXP x EXP
09105	3/4" EXP x EXP

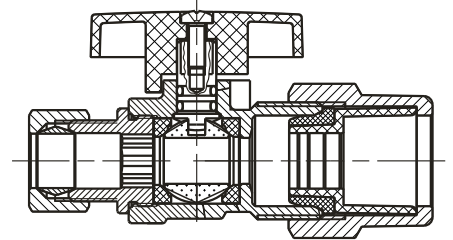

09644	1/2" CPVC x 3/8" O.D.
-------	-----------------------

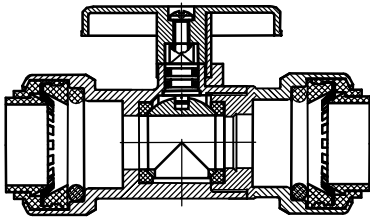

38904	1/2" P.F. x P.F.
-------	------------------

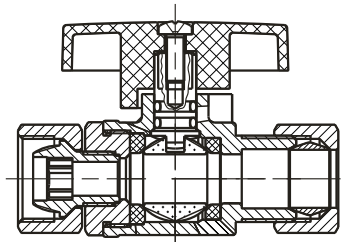

09620	3/8" REV. x 3/8" O.D.
-------	-----------------------




Vancouver ~ Toronto ~ Montreal ~ Cincinnati

www.bmicanada.com

1-800-361-1452

1-800-561-8579



C.P. ANGLE VALVES WITH HAMMER ARRESTER


Specifications for Valves with Hammer Arrester

- Forged brass & copper with total chrome plated
- Quarter turn open & shut
- Self-lubricating P.T.F.E. seats
- Double O-ring for more safety
- Piston type (permanently sealed chamber) arrester
- Copper body chamber with brass cap & brass piston, AA size
- Maximum temperature: 212 °F (100 °C)
- Maximum pressure: 250 psi (17.5 kgf/cm²)
- Absorptive capacity: 150 psi (10.5 kgf/cm²)
- Complies with: ASME A112.18.1, CSA B125.1-11, F1807, F1960, ANSI/NSF 61, ANSI/NSF 372, ANSI/NSF 14 PDI WH201, ASSE 1010




Certified by


IAPMO (cUPC)

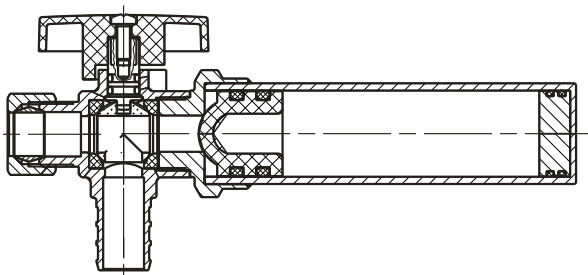


31249 1/2" PEX x 3/8" O.D.

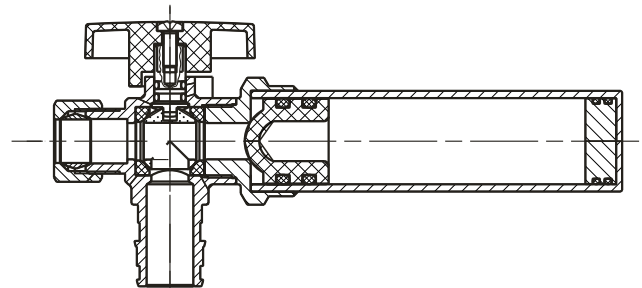

31259 1/2" EXP. x 3/8" O.D.

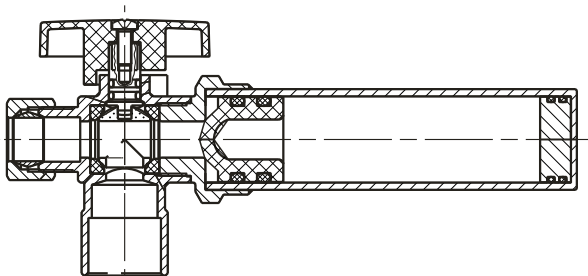

31319 1/2" COP x 3/8" O.D.

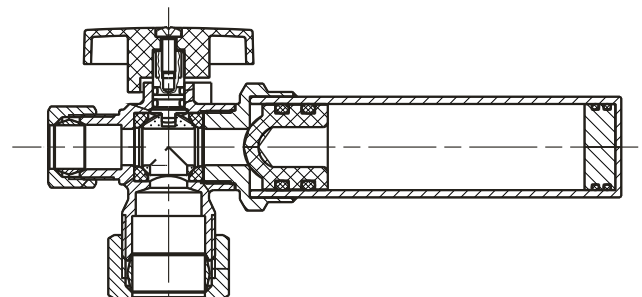

31389 5/8" O.D. x 3/8" O.D.




Vancouver ~ Toronto ~ Montreal ~ Cincinnati

www.bmicanada.com

1-800-361-1452

1-800-561-8579




C.P. STRAIGHT VALVES WITH HAMMER ARRESTER

Specifications for Valves with Hammer Arrester


- Forged brass & copper with total chrome plated
- Quarter turn open & shut
- Self-lubricating P.T.F.E. seats
- Double O-ring for more safety
- Piston type (permanently sealed chamber) arrester
- Copper body chamber with brass cap & brass piston, AA size
- Maximum temperature: 212 °F (100 °C)
- Maximum pressure: 250 psi (17.5 kgf/cm²)
- Absorptive capacity: 150 psi (10.5 kgf/cm²)
- Complies with: ASME A112.18.1, CSA B125.1-11, F1807, F1960, ANSI/NSF 61, ANSI/NSF 372, ANSI/NSF 14 PDI WH201, ASSE 1010




Certified by
IAPMO (cUPC)

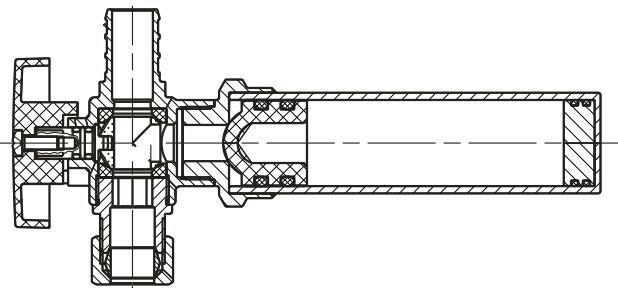


31248 1/2" PEX x 3/8" O.D.

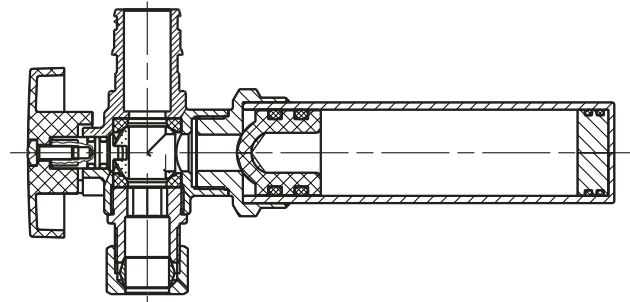


31258 1/2" EXP. x 3/8" O.D.

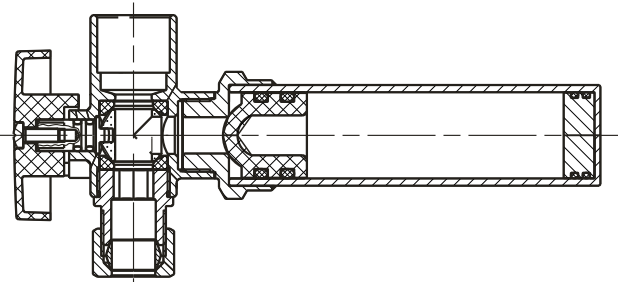

31314 1/2" COP x 3/8" O.D.

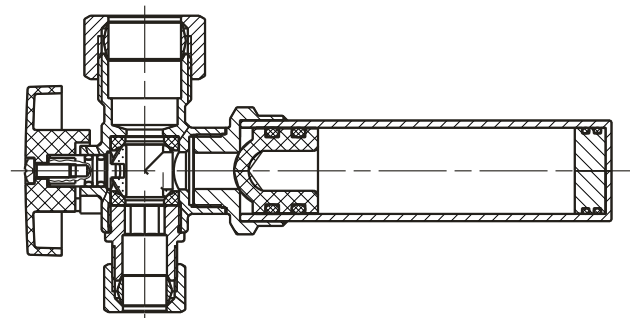

31384 5/8" O.D. x 3/8" O.D.



C.P. VALVES WITH COMPACT HAMMER ARRESTER


Specifications for Valves with Compact Hammer Arrester

- Forged brass and copper total nickel plated
- Quarter turn open & shut
- Self-lubricating P.T.F.E. seats
- Double O-ring for more safety
- Piston type (permanently sealed chamber) arrester
- Copper body chamber with brass cap & brass piston, AA size
- Maximum temperature: 180 °F (82 °C)
- Maximum pressure: 250 psi (17.5 kgf/cm²)
- Absorptive capacity: 150 psi (10.5 kgf/cm²)
- Complies with: ASME A112.18.1, CSA B125.1-11, F1807, F1690, ANSI/NSF 61, ANSI/NSF 372, ANSI/NSF 14 PDI WH201, ASSE 1010




**COMPACT
HAMMER**


Certified by
IAPMO (cUPC)

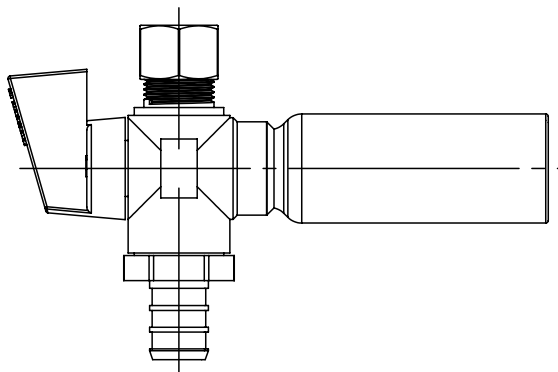


31548 1/2" PEX x 3/8" O.D.

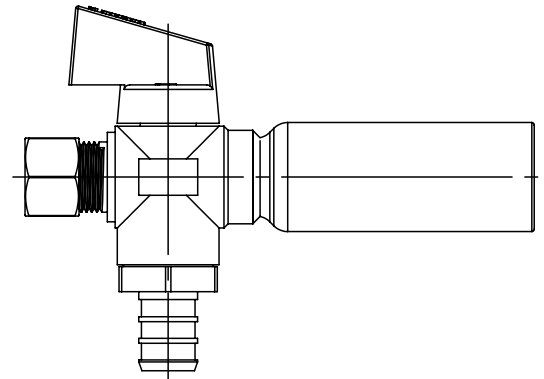

31549 1/2" PEX x 3/8" O.D.

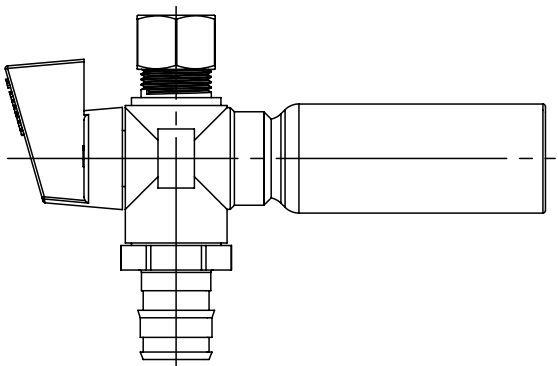

31558 1/2" EXP. x 3/8" O.D.

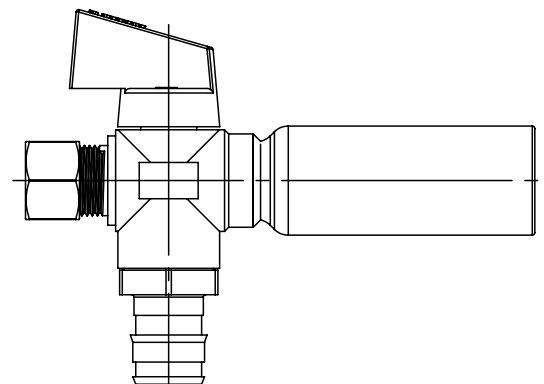

31559 1/2" EXP. x 3/8" O.D.