

# AQUA FLO®

## CRO-800UX6 Tankless Reverse Osmosis Drinking Water System

### Fresh, Great-Tasting Water on Demand!

While most RO systems use plastic storage tanks to hold the filtered water until needed, the Aqua Flo Tankless RO utilizes a high capacity reverse osmosis membrane giving you better tasting water on demand!

### Reduces:

- Total Dissolved Solids (TDS)
- Lead
- Cysts
- Chlorine, Taste and Odor
- Sediment

### Features:



No Tank Required



High-Efficiency Performance  
(2 purified : 1 drain)



Continuous Flow  
0.62 gal/min  
(2.3 L/min)



Leak Detector with Audible Alarm



Filter Life Indicator Lights



Quick Change Disposable Filter Cartridges



Item# 20010100



- Premium Quality Water for Drinking, Ice Cubes and Cooking
- No Heavy Bottles
- Better Tasting Coffee, Tea, Juice and Soup
- Healthier Plants
- Scale-Free Steam Appliances



## Features:

### Faucet Included


- ▶ Chrome faucet with swing spout

### Easy Installation


- ▶ Supply valve included - no pipe cutting or soldering required

Electric power hook-up

- ▶ Quick Connect fittings - Connect tubing to filter in seconds

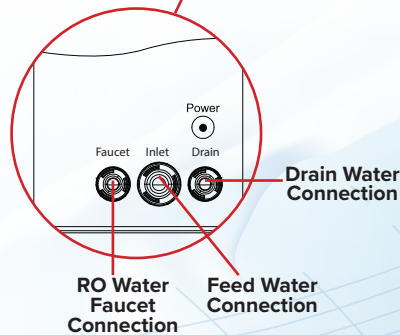

### 3 in 1 Filter - item# 65011215

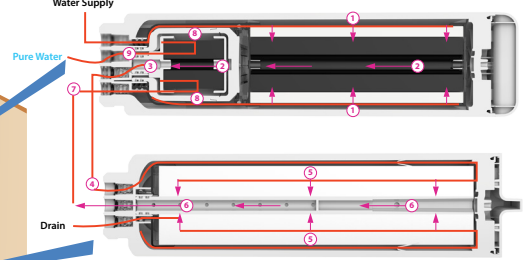

### Membrane - item# 65011216


## Additional Features:

- ▶ Simplicity of Installation - tankless
- ▶ Continuous filtered water flow on demand
- ▶ Space saving design
- ▶ Disposable filter cartridges
- ▶ No storage tank
- ▶ Intelligent filter service life reminder
- ▶ Integrated manifold design
- ▶ High efficiency technology saves water
- ▶ Designed for whisper quiet performance
- ▶ Leak detector with automatic shut off and audible alarm

Model: CR0800-UX6 Item# 20010100		
Water Supply		Potable Water
Feed Line Pressure		30 - 70 psi (96-399 kPa)
Flow Rate		0.62 gal/min (2.3 L/min)
Salt Rejection		≥93.6%
Recovery		65%
Feed Water Temperature		4~38 °C
Ambient Humidity		≤90%
Sound Level		≤60dB
Electrical	Input	100~240V AC 50/60Hz
	Output	DC24V 5A
	Power Used	120W
Membrane	Type	Thin Film Composite Membrane
	Rating	800 G
Connection	Faucet	3/8" Quick Connect
	Inlet	3/8" Quick Connect
	Drain	1/4" Quick Connect
Accessory		Faucet & Installation Kit Included
Product Dimension(WxDxH)		5.1*15.6*14.8 in
Carton Dimensions(WxDxH)		14.1*18.8*17.3 in

\*Salt rejection and water recovery are variable and can be effected by temperature and feed water conditions.

For residential use only.

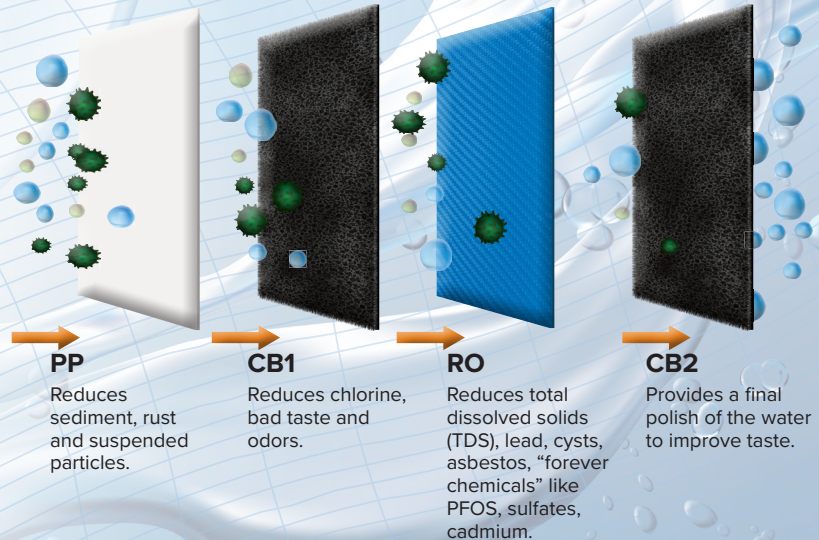

# AQUA FLO®

A Division of



Your Local Water Specialist

80155640 REV 8 2025-06-27  
www.canaturewg.com