



VERSABOOST™ PRO - CONSTANT PRESSURE BOOSTING SYSTEM

The VersaBoost™ Pro series of all-in-one constant pressure boosting systems delivers consistent water pressure—even as demand changes. Built with the trusted quality of Franklin Electric, these compact units combine performance, reliability, and smart design. Easily installed and scaled with standard plumbing, VersaBoost™ Pro is ready for everything from everyday household use to demanding multi-pump applications.

APPLICATIONS

- City water pressure boosting
- Constant pressure for private well systems
- Pressurize water from cistern tanks above or below the systems input
- Re-pressurizing after filtration systems
- Hydroponic or irrigation system boosting

FEATURES

- Powered by Franklin Electric encapsulated 4" submersible pump-motor assembly for superior performance and long life
- Franklin-engineered variable frequency drive delivers built-in protection, including underload, overload, overpressure, overheating, anti-cycling and freeze protection
- Versatile design with a 180° rotatable top cover and LCD display for multi-directional, front or rear plumbing applications
- Quick, easy-to-navigate setup assistant via its display menu or the FE Connect® mobile app
- Removable top, front and rear covers provide easy access to all components without disrupting the plumbing
- Rubber feet dampen noise from vibration
- Integrated check valve and expansion tank included
- Rated for NEMA3R indoor or outdoor applications
- Quiet operation with a noise level as low as 45 dB
- Scalable for multi-pumping systems wirelessly up to 4 units in parallel
- Compatible with FE Connect for onsite connectivity and effortless troubleshooting enhanced with the One-to-One™ real-time remote feature
- Equipped with Bluetooth and WiFi to deliver customizable updates and notifications
- NSF/ANSI/CAN 61 & 372 certified & UL/CSA listed



SPECIFICATIONS


- Operational ranges available in up to 18 or 25 GPM
- Maximum suction lift: 25' (7.6 m)
- Pressure options from 14 to 80 psi
- 120 and 240V models available
- 1" NPT inlet/outlet with molded-in hex grip with robust stainless steel inserts
- Ambient operating temperature: 33°F to 122°F (0.5°C to 50°C)
- Maximum water temperature: 104°F (40°C)
- Maximum system pressure: 100 psi (6.9 bar)

ORDERING INFORMATION


Model No.	Order No.	Input Voltage	Max. Input Amps	HP	Max Flow	Max. Output Pressure	Cord	Weight
FE-VBPRO-115	93381101	120	9.6	0.8	18 gpm (68 lpm)	80 psi (5.5 bar)	6' (1.8m)	39 lbs. (17.7 kg)
FE-VBPRO-230	93381201	208-240	5.5	0.8	18 gpm (68 lpm)	80 psi (5.5 bar)	6' (1.8m)	39 lbs. (17.7 kg)
FE-VBPROXT-230	93382201	208-240	7.0	1.1	25 gpm (95 lpm)	80 psi (5.5 bar)	6' (1.8m)	41.2 lbs. (18.69 kg)

VERSABOOST™ PRO - CONSTANT PRESSURE BOOSTING SYSTEM

PERFORMANCE

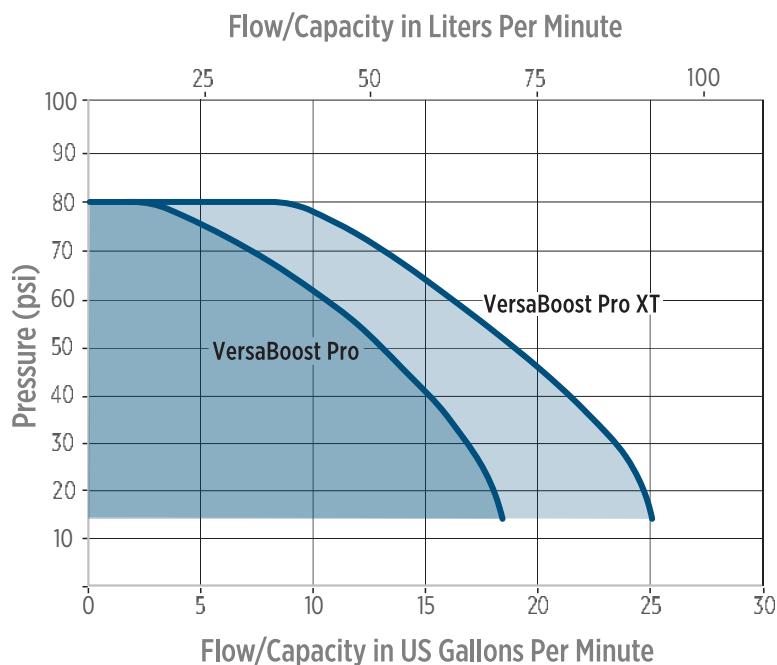

DIMENSIONS

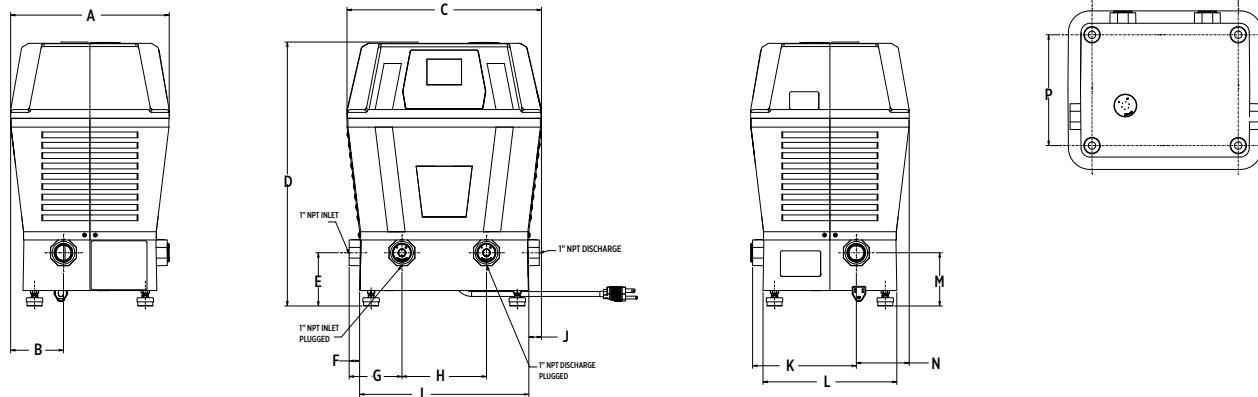

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
10.84" (27.5 cm)	3.61" (9.2 cm)	13.3" (33.8 cm)	18.0" (45.8 cm)	3.64" (9.2 cm)	0.71" (1.8 cm)	3.61" (9.2 cm)	5.78" (14.7 cm)	11.57" (29.4 cm)	0.86" (2.2 cm)	7.1" (18.0 cm)	9.15" (23.2 cm)	3.64" (9.2 cm)	3.61" (9.2 cm)	10.0" (25.4 cm)	7.58" (19.2 cm)