



The new degree of comfort.™




Residential Electric
Professional Classic Water Heaters

Professional Classic™ electric water heaters are engineered for longer life – resistored heating elements and premium grade anode rod

Efficiency

- Standby watts loss 62 - 97
- Isolated tank design reduces conductive heat loss
- Resistored copper upper element and resistored Lifeguard™ stainless steel lower element to prolong anode rod and tank life



Performance

- FHR: 42 - 99 gallons, based on gallon capacity
- Recovery rate is 21 gallons at a 90 degree Fahrenheit rise**

Longer Life

- Rheem exclusive R-Tech (resistored) anode rod provides long-lasting tank protection

Features

- Electric junction box located above heating elements for easy installation
- Over-temperature protector cuts off power in excess temperature situations

- Automatic thermostat keeps water at desired temperature


Plus...

- EverKleen™ self cleaning device fights harmful sediment build-up with a high-velocity spiraling water stream – helps operating efficiency by saving energy, money and improving tank life
- Enhanced-flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant

Warranty

- 6-Year limited tank and parts warranty*

*See Residential Warranty Certificate for complete information

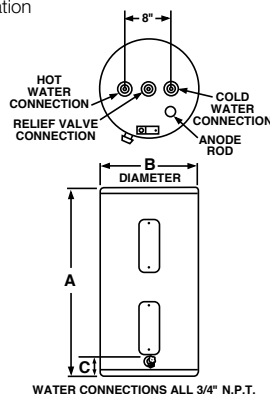

WATER CONNECTIONS ALL 3/4" N.P.T.



Professional Classic

30 to 60-Imperial Gallon

Capacities

120 and 240 Volt AC/Single Phase
Double and Single Element Models
Electric



DESCRIPTION				FEATURES						ROUGHING IN DIMENSIONS					
MODEL NUMBER	STORAGE CAP. IMP. GALS.	LITRES	ELEM. QTY.	120 VOLT WATT.	120 VOLT AMPS.	HEATING ELEMENTS 208 VOLT WATT.	HEATING ELEMENTS 208 VOLT AMPS.	240 VOLT WATT.	240 VOLT AMPS.	HEIGHT (IN.) A	OUTSIDE DIAMETER (IN) B	HEIGHT TO DRAIN VALVE (IN) C	ESTIMATED SHIP. WEIGHT LBS.	KG	STANDBY WATTS LOSS
TOP INLET															
PROE30 S2 CN62	30	135	2	1500	12.5	2250	10.8	3000	12.5	46-1/2	19-3/4	3-1/2	105	48	62
PROE40 M2 CN66	37.5	170	2	1500	12.5	2250	10.8	3000	12.5	46	21-3/4	3-1/2	117	53	66
PROE40 M2 CN61†	37.5	170	2	N/A	N/A	N/A	N/A	3000	12.5	46	21-3/4	3-1/2	117	53	61
PROE40 M2 CN61†	37.5	170	2	N/A	N/A	N/A	N/A	3800	18.8	46	21-3/4	3-1/2	117	53	61
PROE60 T2 CN87	60	270	2	N/A	N/A	3380	16.3	4500	18.8	59	23	3-1/2	177	80	87
SIDE INLET															
PROE30 S2 CN64†	30	135	2	1500	12.5	N/A	N/A	3000	12.5	46-12	19-3/4	3-1/2	105	48	64
PROE60 T2 CN97†	60	270	2	N/A	N/A	3380	16.3	4500	18.8	58	23	3-1/2	174	79	97

- Heaters furnished with standard 240 volt AC, single phase non-simultaneous wiring, and 4500 watt upper and lower heating elements.
- Special Wiring Options – A limited number of special wiring options are available. Consult factory for price and availability.
- All models equipped with heat traps.

† Complies with BC construction requirements.

**Recovery = wattage/2.42 x temp. rise °F.
Example: $\frac{4500W}{2.42 \times 90^\circ} = 21 \text{ GPH}$

**Recovery calculations used are based on 4500 watt elements used in non-simultaneous operation.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED HOME COMFORT

PRINTED IN U.S.A. 01/14 WP FORM NO. PROE RHCAN