



# 20AE

## 4" AEROBIC STAINLESS STEEL SUBMERSIBLE EFFLUENT PUMP

### FEATURES


- Durable pump construction made of stainless steel with thermoplastic reinforcement
- Industry-leading drawdown of 4½"
- Approved for Residential use: CSA/CUS Listed
- Built-in thermal overload protection with automatic reset
- Pump base accepts a 3" pipe to assist with height adjustments
- Discharge head with stainless steel insert
- Built-in check valve and capacitor

### PERFORMANCE RATINGS

Head	Flow
16	30
45	26
80	20
110	14
135	4.4
142	0



## PERFORMANCE CURVE

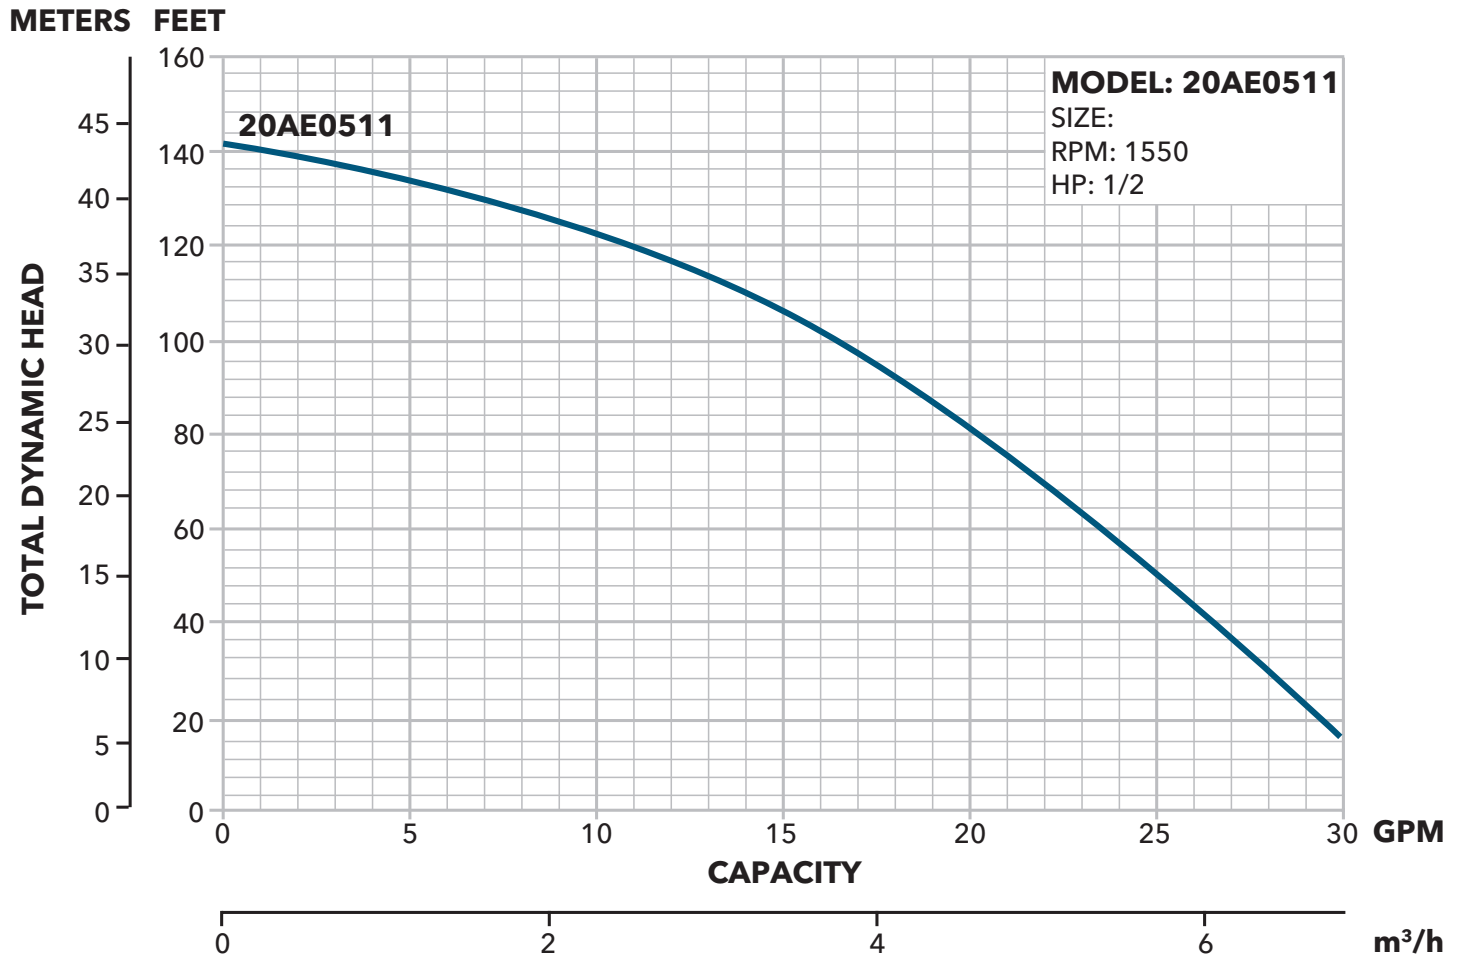

## PRODUCT SPECIFICATIONS

Model	Part No.	HP	Volts	Amps	Phase	Cord Length	Drawdown	Capacity	Discharge Size	Switch Type
20AE	20AE0511	½	115	9½	1	10'	4½"	Up to 20 GPM	1¼"	Manual



Xylem Inc.  
 2881 East Bayard Street Ext., Suite A  
 Seneca Falls, NY 13148  
 Phone: (866) 325-4210 • Fax: (888) 322-5877  
[www.gouldswatertechnology.com](http://www.gouldswatertechnology.com)

Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license.  
 © 2018 Xylem Inc. 20AESALES January 2018