




FEATURES

- Durable pump construction made of stainless steel with thermoplastic reinforcement
- Industry-leading drawdown of 4½"
- Approved for Residential use: CSA/CUS Listed
- Built-in thermal overload protection with automatic reset
- Pump base accepts a 3" pipe to assist with height adjustments
- Discharge head with stainless steel insert
- Built-in check valve and capacitor


20AE

4" AEROBIC STAINLESS STEEL
SUBMERSIBLE EFFLUENT PUMP

PERFORMANCE CURVE

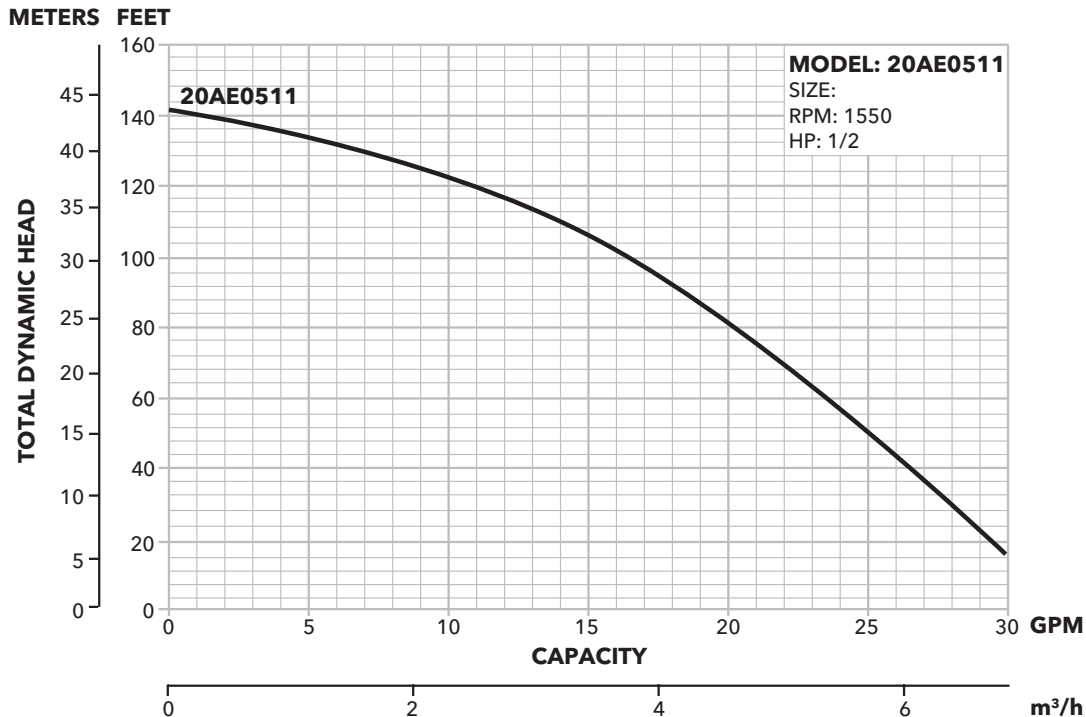

DIMENSIONS

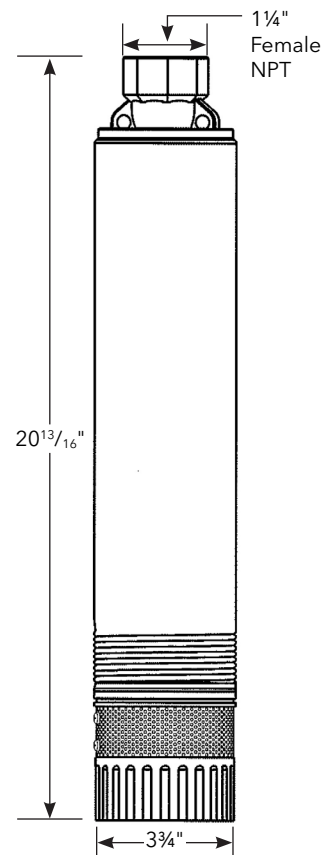

PERFORMANCE RATINGS

Head	Flow
16	30
45	26
80	20
110	14
135	4.4
142	0

PRODUCT SPECIFICATIONS

Model	20AE
Part No.	20AE0511
HP	1/2
Volts	115
Amps	9.5
Phase	1
Cord Length	10'
Drawdown	4 1/2"
Capacity	Up to 20 GPM
Discharge Size	1 1/4"
Switch Type	Manual



Xylem Inc.
 2881 East Bayard Street Ext., Suite A
 Seneca Falls, NY 13148
 Phone: (866) 325-4210
 Fax: (888) 322-5877
www.gouldswatertechnology.com

Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license.
 © 2018 Xylem Inc. B20AE January 2018