


Rubberized Cork Insulation Tape

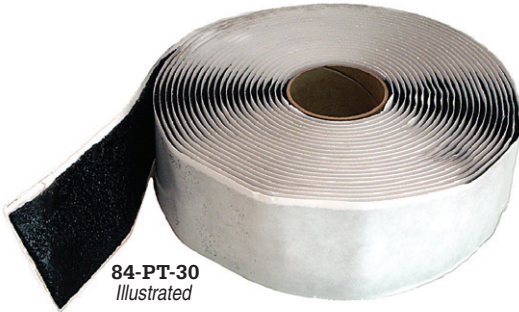

84-PT-30
Illustrated

Cork Tape


| Part # | Description |
|----------|----------------------|
| 84-PT-30 | 1/8" x 2" x 30' Roll |

Wraptite Rubberized Cork Insulation Tape

Formulated to provide insulation and to prevent condensation on hot or cool pipes, fittings and tubing used in heating, air conditioning, refrigeration and plumbing applications. Cork Insulation Tape adheres well to most clean, dry surfaces and to itself, making it possible to apply more than one layer without adding fasteners or adhesives.

It is sufficiently soft and pliable enabling it to be molded around most fittings or connections. The material retains its flexibility and adhesion after prolonged exposure to UV and over a service temperature range of -29°C to 88°C (-20°F to 190°F). Cork Insulation Tape is black in colour and has a grainy, rubber-like consistency which is non-toxic and non-asbestos.

Foam Insulation Tape

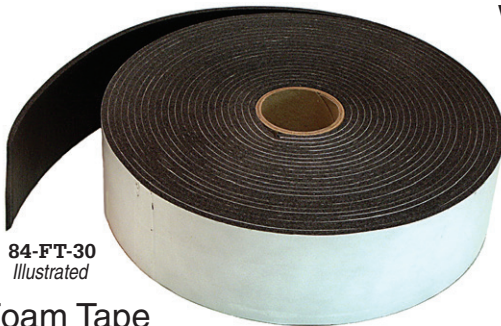

84-FI-30
Illustrated

Foam Tape

| Part # | Description |
|----------|----------------------|
| 84-FI-30 | 1/8" x 2" x 30' Roll |

Wraptite Foam Insulation Tape

Foam Insulation Tape is designed to seal, insulate and isolate vibration in air conditioning and refrigeration applications. The soft, flexible, closed cell sponge tape with paper covered self-adhesive backing seals out air and moisture while reducing heat loss or transfer. Cold water pipes, valves, chilled water and refrigeration lines can be wrapped to prevent sweating or condensation while hot water pipes and pipe heaters can be wrapped to insulate against heat loss.

Easily applied by hand, Wraptite Foam Insulation Tape adheres well to most clean, dry surfaces and to itself, making it possible to apply more than one layer. The formulated operating temperature of Wraptite Foam Insulation Tape is between -34°C to 82°C (-30°F to 180°F) with the ability to intermittently tolerate temperature of 98°C (210°F).

Slugs & Cords



84-PC-30
Illustrated

84-PS-30
Illustrated

Slugs & Cords

| Part # | Description |
|-----------|------------------|
| 84-PC-30 | 3/8" x 25' Cord |
| 84-PS-30 | 2 lb. Slug |
| 84-PS30-B | 50 lb. Bulk Slug |

Wraptite Slugs & Cords

Sealing slugs & cord are soft, permanently pliable, water-resistant sealants having a wide variety of applications. The product has the unique quality of retaining the same consistency throughout its application range of -7°C to 60°C (20°F to 140°F). Non-asbestos and non-hardening, remains flexible to -7°C (20°F).

Sealing slugs & cords are used widely in the air conditioning and refrigeration industries to seal around outer cases, behind hinges and under breaker strips. They can be used to seal out air or moisture around utility panels, cables, ducts, window frames and metal joints. This product adheres to metal, wood, glass, plastic and most clean surfaces to provide an effective barrier against water, moisture, dirt and dust. It is non-staining, non-bleeding, odorless and can be painted.



Wraptite's Standard Packaging

Includes, directions, bar-coding and complete product line descriptions both in French & English.