

TOWNSEND® FREESTANDING TUB **HIGH GLOSS ACRYLIC**

TOWNSEND® FREESTANDING TUB

☐ 2691.004 TOWNSEND FREESTANDING TUB

Product Features:

- Contemporary styling
- Straight back wall allows for a flush-to-the-wall installation
- High quality seamless acrylic construction with fiberglass reinforcement
- Center drain
- Wide deck ledge on one side is ideal for deck mount and/or handshower
- Wide deck ledge can be used to store bath accessories
- Integrated tub drain for easy installation
- Adjustable leveling feet under the tub
- · Easy to clean high-gloss surface
- Removable access panel on the back of the tub
- Coordinates with Townsend bathroom suite making a complete bathroom remodel easier
- Limited Lifetime warranty

Nominal Dimensions:

68" x 36" x 24" (1727 x 915 x 610mm)

Compliance Certifications -Meets or Exceeds the Following Specifications:

- IAPMO Z124
- CSA B45.5-11

SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS

| AND PRODUCT SPECIFICATIONS | |
|----------------------------|--|
| | |

| To Be | Specified | - Red | quired: |
|-------|------------------|-------|---------|
|-------|------------------|-------|---------|

☐ Color: White

1582.000 Townsend® Drain and Overflow Kit

Choose Finish:

- □ .002 Chrome
- □ .013 Polished Nickel
- ☐ .278 Legacy Bronze
- □ .295 Brushed Nickel


Recommended: For concrete slab installation

Drain adapter rough-in suggest

- ☐ OS&B® ABS Island Tub Drain™ Rough-In #ITD35
- PVC Island Tub Drain[™] Rough-In #ITD5135
- ☐ Cast Iron Island Tub Drain Rough-In #ID357

Island Tub Drain™ is a registered trademark of OS&B®



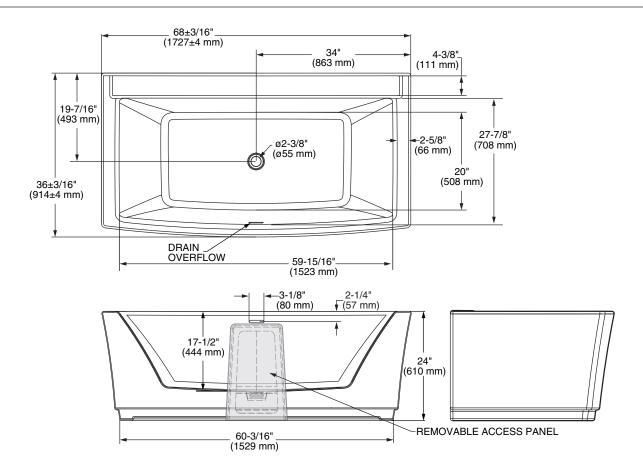

| GENERAL SPECIFICATIONS FOR | | | |
|----------------------------|------------------------------------|--|--|
| 2691 FREE STANDING BATH | | | |
| INSTALLED SIZE | 68 x 36 x 24 in. | | |
| | (1727 x 914 x 610mm) | | |
| WEIGHT | 151 Lbs. (69 Kg.) | | |
| WEIGHT w/WATER | 697 Lbs. (316 Kg.) | | |
| GAL. TO OVERFLOW | 65 Gal. (246L) | | |
| BATHING WELL AT SUMP4 | 41-1/2 x 21-1/2 ln. (1054 x 546mm) | | |
| BATHING WELL AT RIM6 | 61-7/8 x 29-3/8 ln. (1572 x 746mm) | | |
| WATER DEPTH TO OVERFLOW | V15 In. (381mm) | | |
| FLOOR LOADING | 38 Lbs./Sq.Ft. (186 Kgs./Sq.m) | | |
| (PROJECTED AREA) | | | |

NOTES:

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATHTUB FOR ADDITIONAL INFORMATION.

Fittings not included and must be ordered separately. Provide suitable reinforcement for all supports. Mounting holes drilled by installer.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.

© 2019 AS America Inc.