

Lavatory Faucets

Single shank mixing faucet less coverplate-CER-TECK® 1/4 turn ceramic structures

Model No: 25C3827

COMPLIES WITH:

- CSA certified.
- Complies to ASME A112.18.1/CSA B125.1
- Verified compliant with 0.25% weighted average Pb content regulations
- Verified compliant with 0.25% weighted average Pb content regulations
- & Indicates compliance to ICC/ANSI A117.1
- Outlet options 2, 3, 4 and 7 are EPA WaterSense listed
- (Contact Delta Representative for State and/or Local Approvals)





SPECIFICATION:


- CAST BRASS single shank mixing sink faucet
- Two handle, polished chrome plated finish
- CER-TECK® 1/4 turn ceramic structures
- Metal hold-down package
- Anti-rotation, body mounted locking pins
- BRASS swing-spout or 3/8" IPS BRASS PIPE Rigid/Swivel Gooseneck Spout
- Single shank mixing faucet less coverplate-CER-TECK® 1/4 turn ceramic structures
- Spout#: 8 Gooseneck spout-4.5" spout reach -Standard rigid/swivel field installation-Vandal resistant .090" wall thickness(R2)
- Outlet#: 2 Vandal Resistant 1.5 GPM (5.7 L/Min) Laminar w/Agion® Antimicrobial
- Handle#: 7 63.5 mm (2.5") Balanced Lever Handles ADA compliant -Metal - Color Indexed - Vandal Resistant screws

OPERATION:

Not Available

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced May 24, 2017.

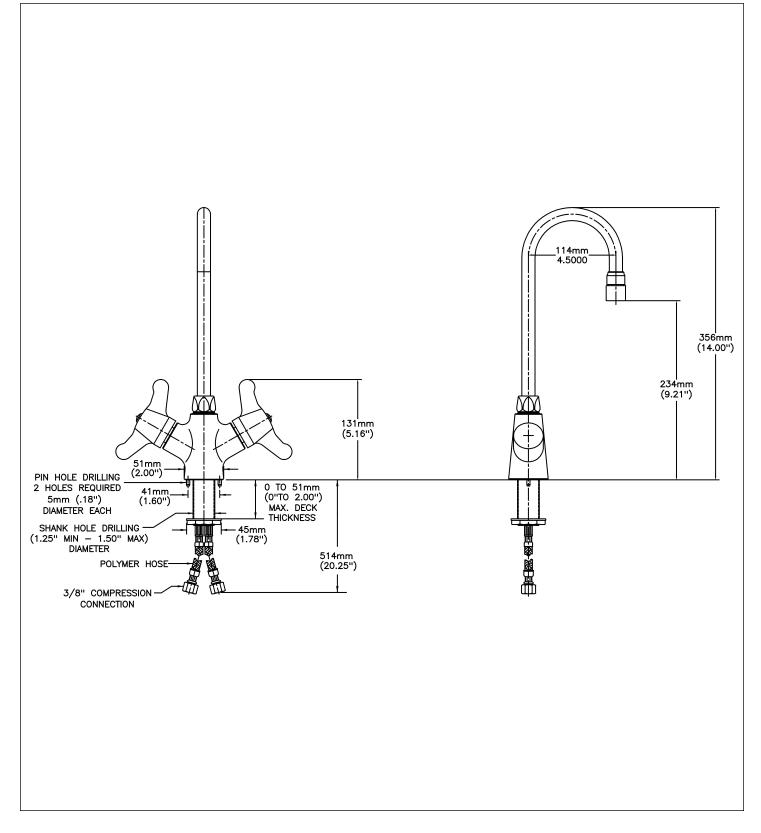

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced May 24, 2017.