



2-1/2" & 3" DIAL BI-METAL AND HOT WATER THERMOMETER

APPLICATION:

- General purpose industrial thermometer
- Red Organic Kerosene Oil in hot water thermometer
- Brass thermowell

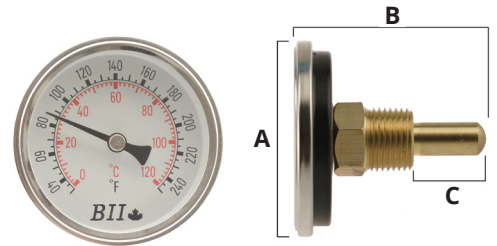

THERMOMETER SPECIFICATIONS	
Standard	ASME B40.1
Dial	2" (51mm) white aluminum dial
Case	Aluminum
Lens	Acrylic
Connection	Brass / Stainless Steel
Element	Coiled Bi-Metal / Brass
Pointer	Aluminum (Anodized Black)
Welding	Tin Solder
Pressure Rating	Thermowell Max: 87 PSI (600 kPa)

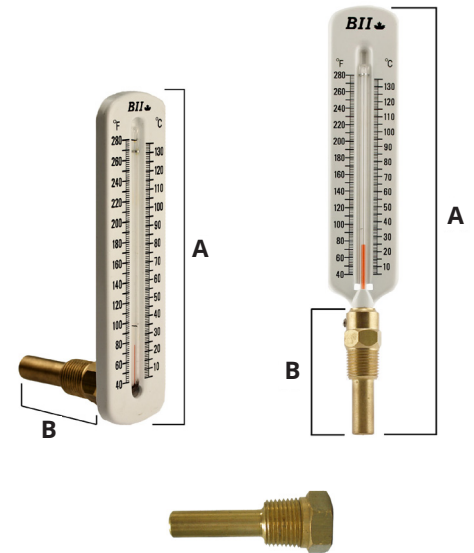

DIMENSIONS							
Part No.	Connection	Dual Range		A	B	C	Weight grams
		°F	°C				
BI-METAL THERMOMETER							
TW25-CB2-250-25	1/2" CBM	32-250	0-120	2-1/2"	2-9/16"	1"	100
TW30-CB2-250-25	1/2" CBM	32-250	0-120	3-5/16"	3-11/16"	2-7/16"	300
TW25-CB2-250-SS25	1/2" CBM	32-250	0-120	2-1/2"	2-9/16"	1"	100
HOT WATER THERMOMETER							
THW8-A2-280	1/2" MPT	40-280	5-135	6-15/16"	3-1/8"	N/A	320
THW8-S2-280	1/2" MPT	40-280	5-135	10-7/8"	3-1/8"	N/A	320
THERMOWELL							
TW-05/40MM*	1/2" MPT	32-250	0-120	N/A	N/A	N/A	50

* for use with TW25-CB2-250-25

BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com