



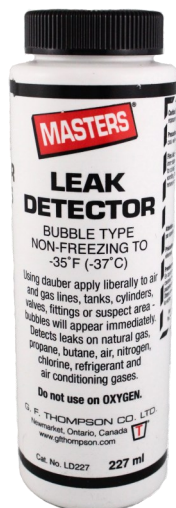

LEAK DETECTOR

Bubble Type

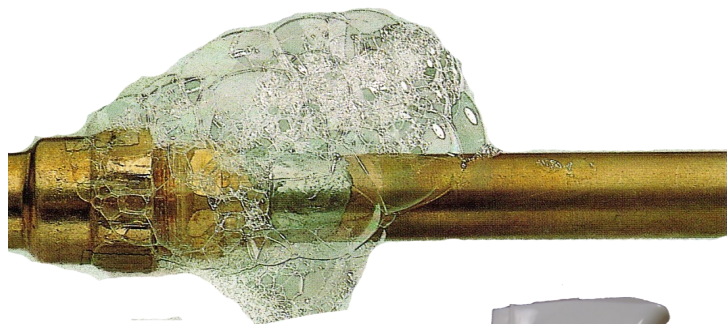

MASTERS® LEAK DETECTOR quickly locates pin hole leaks even at low pressures. It is a clear, non-freezing (to -35°F / -37°C) liquid. It is also available in pink for easy spotting. It can be used wherever areas are to be tested, or leaks suspected, in:

- Appliances
- Air and Gas Lines
- Cylinders
- Fittings
- Piping
- Pressure Vessels
- Tanks
- Tubing
- Valves

MASTERS® LEAK DETECTOR will detect leaks of:

- Ammonia
- Butane
- Chlorine
- CO₂
- Compressed Air
- Helium
- Inert Gases
- Natural Gas
- Nitrogen
- Propane
- Refrigerants and Air Conditioning Gases

Catalogue Number	Description	Quantity per Case	Approximate Case Shipping Weight
LD059	59 ml (1/8 pt) Spray Bottle	20	5 lbs 2 kg
LD227	227 ml (1/2 pt) Applicator Bottle	20	13 lbs 6 kg
LD500	500 ml (1 pt) Spray Bottle	12	15 lbs 7 kg
LD4L	4 L (1 gal) Jug	4	34 lbs 16 kg
LD20L	20 L (5 gal) Pail	1	44 lbs 20 kg

NOT FOR USE ON
Oxygen Systems.

Directions:

- Apply liberally to the suspect area. If there is a leak, bubbles will form.

G. F. THOMPSON CO. LTD.

The professional choice since 1947

1-800-499-3673

www.gfthompson.com

Canada

