

BSC SERIES SUMP PUMP CHECK VALVE WITH COUPLING(S)




APPLICATION:


- Full port valve design
- Flapper opens 100%
- Flapper seat design reduces water hammer and debris buildup
- Designed to be threaded directly into pump discharge

SPECIFICATION:


- Max Temperature Rating: 140°F (60°C)
- Material: ABS
- Straight or Reducing Flexible Rubber Coupling (FRC) included
- Four all stainless steel clamps included
- Rubber Boot Installation: 10 feet of head/4.3 psi
- Solvent Weld Installation: 58 feet of head/25 psi
- For SRS Series: Standard part has a drill indicator, -AR part has an air release hole drilled

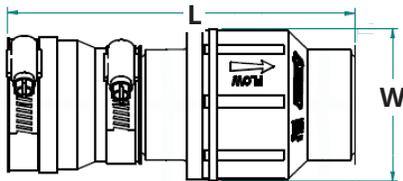


SRS Series

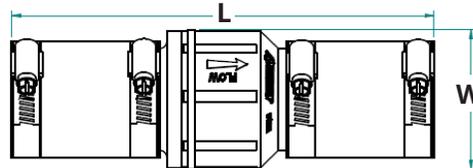

SB Series

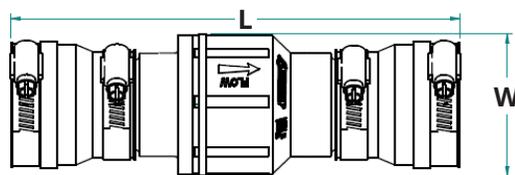

DRS Series

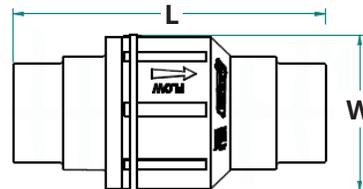

SXS Series

DIMENSIONS

Part No. Standard	Part No. Air Release	Inlet	Outlet	L		W		Weight grams
				inch	mm	inch	mm	
BSC-125-SRS*	BSC-125-SRS-AR*	1-1/4" MPT	1-1/4" FRC or 1-1/2" FRC	5.10	129.54	2.85	72.39	202
BSC-150-SRS*	BSC-150-SRS-AR*	1-1/2" MPT	1-1/4" FRC or 1-1/2" FRC	5.10	129.54	2.75	69.85	200
BSC-125-SB	—	1-1/4" FRC	1-1/4" FRC	7.70	195.58	2.61	66.29	256
BSC-150-SB	—	1-1/2" FRC	1-1/2" FRC	7.90	200.66	2.61	66.29	288
BSC-125/150-DRS	—	1-1/4" FRC or 1-1/2" FRC	1-1/4" FRC or 1-1/2" FRC	8.28	210.31	2.61	66.29	311
BSC-125/150-SXS	—	1-1/4" FRC or 1-1/2" SPIGOT	1-1/4" FRC or 1-1/2" SPIGOT	5.20	132.08	2.61	66.27	95
BSC-150-SXS	—	1-1/2" SPIGOT	1-1/2" SPIGOT	4.35	110.49	2.60	66.04	91
BSC-200-SB **	—	2" FRC	2" FRC	9.62	244.35	3.17	80.52	481

* Only one reducing flexible rubber coupling and two stainless steel clamps included

** Neoprene gasket



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com