

# For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

## SSR19X Multi-Turn Angle Stop w/ Lock Shield Screwdriver Slot – Sweat x Compression

**Use:** For use with potable water systems in accessible locations only. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications, use our KT™ series ball stops

### Design Features:

- **Machined one-piece brass body** provides strength, durability, and long-lasting performance




### Operating Specifications:

**Temperature:** 40° - 140° F

**Pressure:** 125 PSI maximum

STOP MATERIAL SPECIFICATIONS	
<b>Body</b>	Brass, plated
<b>Screwdriver Slot Stem</b>	Brass, plated
<b>Bib &amp; Packing Washer</b>	Rubber
<b>Lock Shield</b>	Brass, plated
<b>Compression Nut</b>	Brass, plated
<b>Compression Sleeve</b>	Brass

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
SSR19X	1.04	2.16

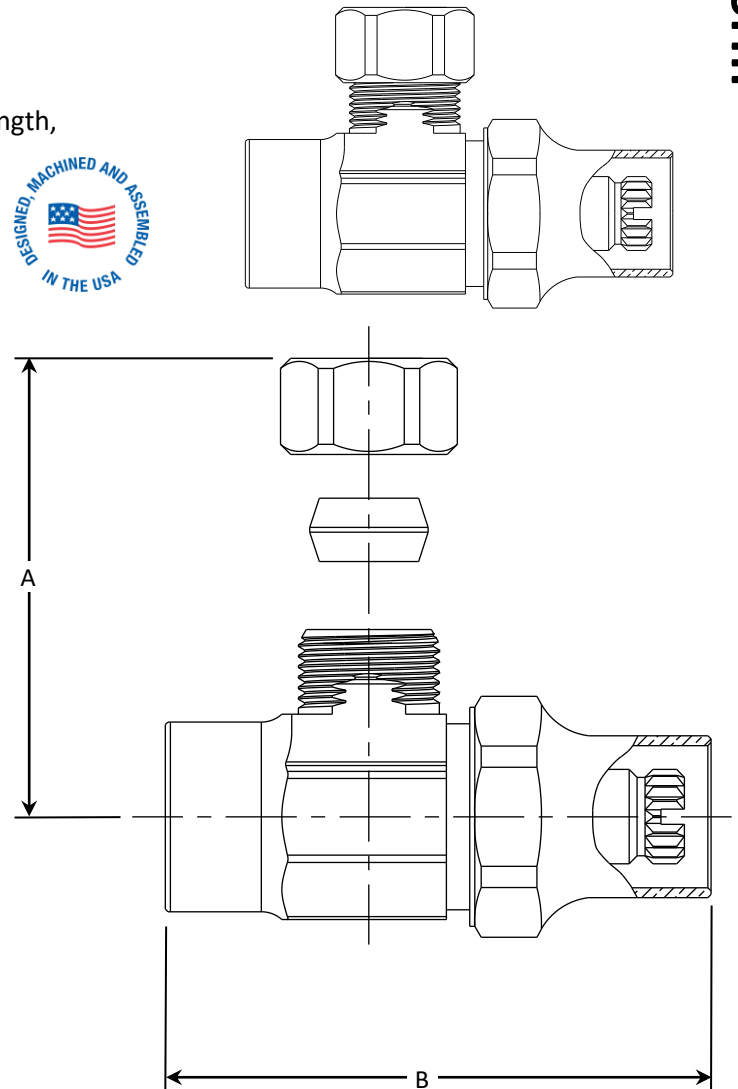

### Part Listing:

- SSR19X C 1/2" sweat x 3/8" OD compression with lock shield, screwdriver slot, chrome, tray

### Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI372 & NSF61)



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

400.329 SSR19X Multi-Turn Angle Stop w/Lock Shield - Sweat x Comp REV 9.19

**BrassCraft®**

©2019 Brasscraft Manufacturing Company