

# Water Systems

## Product Catalog

- Constant Pressure System • Jet Pumps • Lawn Sprinkler Pumps • End Suction Centrifugal Pumps
- Pressure Tanks • 4" Submersible Well Pumps



Wastewater

Water Systems

HVAC

Industrial

Engineered  
Products

**LittleGIANT®**

# Brand known.

A proven line of heavy-duty pumps for plumbing contractors.


## Jet Pumps – Shallow Well Applications

- For applications with a vertical distance of 25 feet or less
- Cast iron casing and seal plate
- Precision-engineered thermoplastic impeller, diffuser, nozzle, and venturi
- A.O. Smith higher than standard NEMA factor dual compartment motors



## Jet Pumps – Convertible Well Applications

- For applications with a vertical distance of 90 feet or less
- Cast iron casing and seal plate
- Precision-engineered thermoplastic impeller, diffuser, nozzle, and venturi
- A.O. Smith higher than standard NEMA factor dual compartment motors

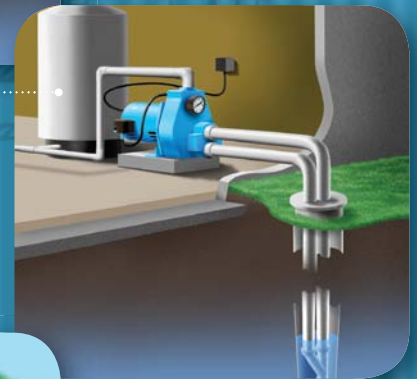

## Sprinkler – Irrigation Pumps

- For residential and commercial lawn and turf applications
- Self-priming
- Cast iron casing
- Includes LSP Series sprinkler pumps and CP Series end suction centrifugal pumps



## Pressure Tanks – Water Well and Pressure Boosting

- Patented, controlled action, double diaphragm assembly is completely contained in a pre-pressurized air cushion to reduce condensation
- Quality tested at four different stages on the production line
- Welded malleable water connection withstands aggressive water



## 4" Submersible Pumps – Deep Well Applications

- For new installs or replacements
- Performance ranges from 5 to 22 gpm
- Thermoplastic or stainless steel
- Powered by Franklin Electric technically superior submersible motors



See your distributor for more information, or call Franklin Electric directly at 1-800-701-7894.

# Water Systems Product Catalog

- Constant Pressure System • Jet Pumps • Lawn Sprinkler Pumps
- End Suction Centrifugal Pumps • Pressure Tanks • 4" Submersible Well Pumps



## Table of Contents

### Constant Pressure System

Inline CP . . . . . 2

### Jet Pumps

Shallow Well Jet Pumps . . . . . 4  
Shallow Well Jet Pumps Systems . . . . . 5  
Convertible Jet Pumps . . . . . 6  
Convertible Jet Pumps Systems. . . . . 7  
Utility Jet Pumps . . . . . 8

### Lawn Sprinkler Pumps

LSP Series . . . . . 9

### End Suction Centrifugal Pumps

CP Series. . . . . 10

### Pressure Tanks

RL Series. . . . . 11

### 4" Submersible Well Pumps

5 GPM. . . . . 13  
8 GPM. . . . . 16  
12 GPM. . . . . 19  
16 GPM. . . . . 22  
22 GPM. . . . . 25  
5 - 22 GPM Pump Ends . . . . . 28  
Control Boxes. . . . . 29  
Specification Charts . . . . . 30  
Glossary . . . . . 31

## Constant Pressure System

# Inline CP

### Applications

- For applications on municipal water or private well systems
- For multi-family dwellings - duplexes, triplexes, and quads
- For increased and constant water pressure from water storage/cistern systems
- For irrigation and water reclamation systems
- For general pressure regulation/increase

### Features

- Increase pressure by up to 60 psi
- Handles up to 35 gpm
- Complete packaged system
- Small and compact design
- Simple and easy installation
- NEMA 4 electronics enclosure
- Mount in any configuration
- Product power rating: 1.2 hp, 0.9 kW
- Built in system protections guard the Inline CP from many common failure modes including: surge protection, voltage underload, locked pump, open circuit, short circuit, and overheated controller.
- Capable of operating with more than one pump in parallel for larger volume demand applications



### Model Characteristics


Item #	Model Description	Input Voltage	Input Phase
90411101	25LGIL1100N4 <sup>1</sup> (Inline CP)	230	Single
305707907	Drive Assembly	230	Single
305707902	Pump Motor Assembly	230	Three
305707903	Mounting Feet	N/A	N/A
305707906	Pressure Sensor	N/A	N/A
604452	Pressure Tank (2-gallon) Total Volume	N/A	N/A
604453	Pressure Tank (4-gallon) Total Volume	N/A	N/A
305707904	Fastener Kit	N/A	N/A
305707905	Pressure Sensor Cable	N/A	N/A
305707909	Overpressure Shut-off Switch <sup>2</sup>	N/A	N/A
305707908	Overpressure Shut-off Switch Cable <sup>2</sup>	N/A	N/A
225970901	High Pressure Sensor Kit	N/A	N/A
305707912	Over Pressure Shut-off Sensor/Cable Kit <sup>2</sup>	N/A	N/A
5850012000	Duplex Alternator	115	Single



<sup>1</sup> Includes pump, motor, drive, pressure sensor, and cables.

<sup>2</sup> Overpressure switch is sold as an accessory and is not required for normal operation.


### System Components

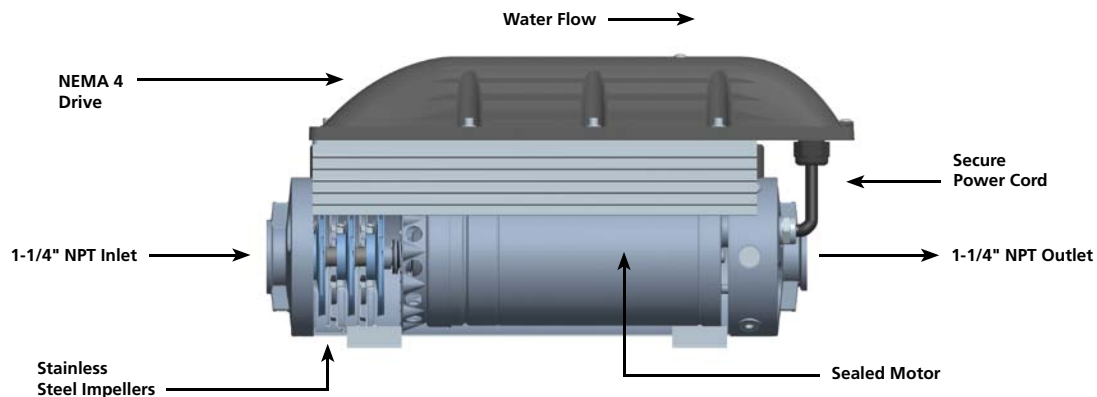

# Constant Pressure System

## Inline CP

### Typical Installation

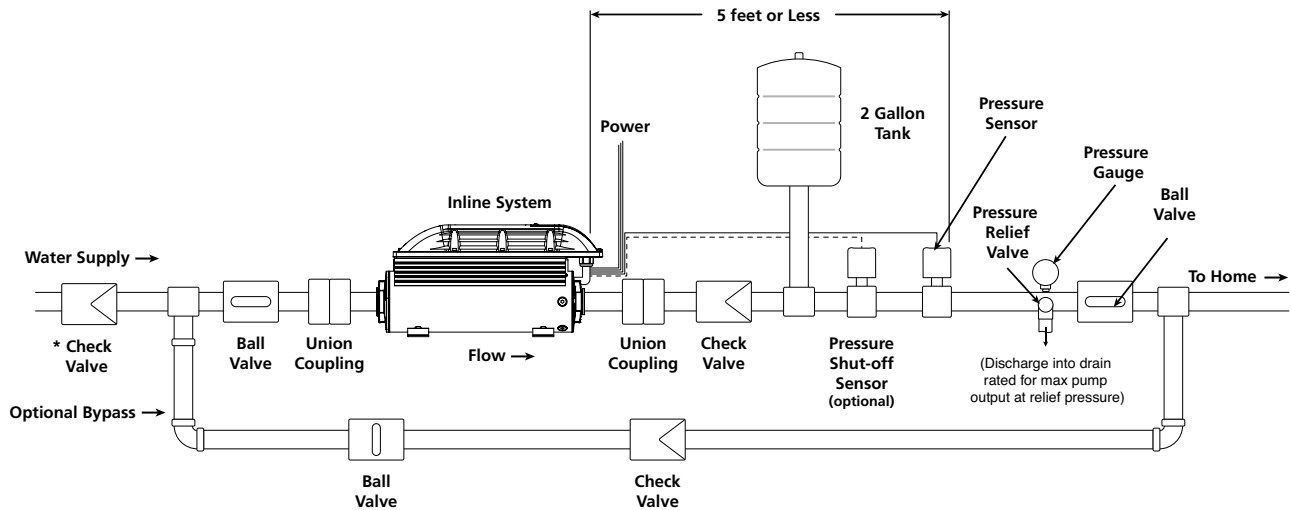


**\*NOTICE:** If system plumbing does not have a backflow prevention device, a check valve is required on the incoming water supply line.

**NOTE:** These optional components are shown in a typical installation diagram. They should be used at the installer's discretion as required for particular applications.

**NOTE:** 2 gallon total volume tank is a recommendation only. Other tank sizes are acceptable based on specific application conditions.

### Performance Curve

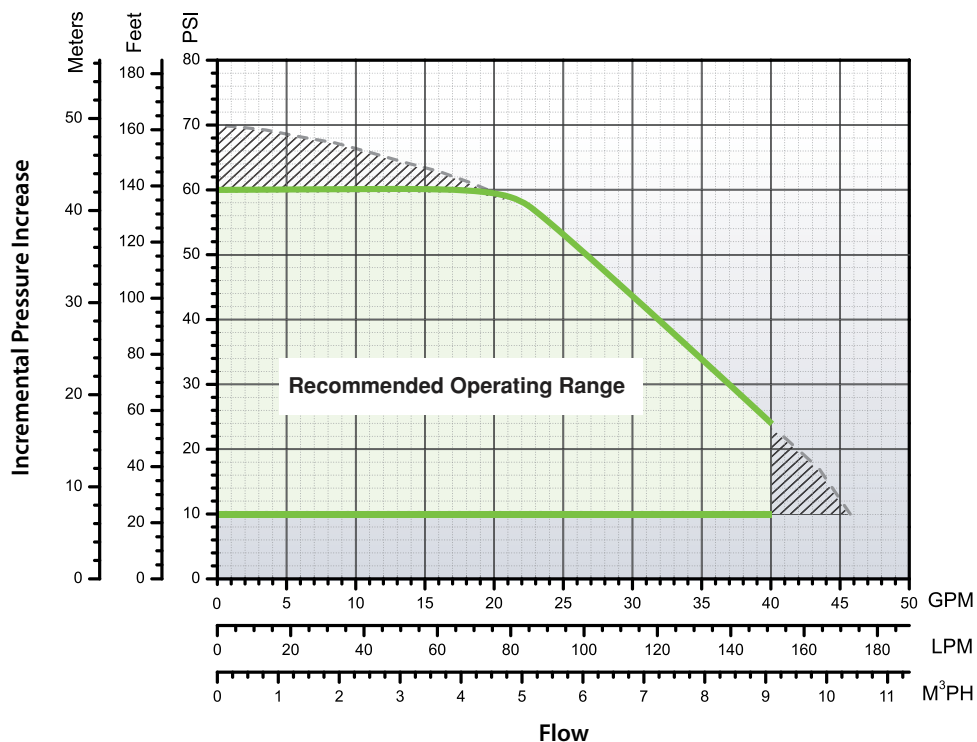

**NOTE:** Running outside of 'Recommended Operating Range' for short periods of time is permissible.

# Shallow Well Jet Pumps



### Applications

- For supplying fresh water to rural homes, farms, and cabins
- For installations where the vertical distance from the pump to the pumping water level does not exceed 25 feet (7.6 m)

### Features

- Cast iron casing and seal plate for durability and long life
- A.O. Smith higher than standard NEMA service factor dual compartment motor
- Dual voltage 115/230 V
- Pressure switch preset at 30/50 psi
- 1-1/4" (31.7 mm) suction, 1" NPT (25.4 mm) discharge
- Pressure gauge included with all models
- Stainless steel motor shaft and dual ball bearings
- Precision-engineered thermoplastic impeller, diffuser, nozzle, and venturi
- Clean-out plug to easily unclog nozzle
- Fully serviceable with two-year warranty

### Model Characteristics

Item #	Model	HP	Total Suction Lift (ft/m)	Pump Capacity GPM (LPM) Discharge Pressure in PSI								Max. Pressure in PSI (kg/cm <sup>2</sup> )		
				20	25	30	35	40	45	50	55		60	
558279	JPH-50-C	1/2	5 (1.5)	8.8 (33.3)	8.9 (33.7)	8.6 (32.5)	8.4 (31.8)	8.3 (31.4)	8.1 (30.3)	7.4 (28)	6.0 (22.7)	4.7 (17.8)	80.6 (5.7)	
			10 (3.1)	7.8 (29.5)	7.7 (29.1)	7.5 (28.6)	7.4 (28)	7.25 (27.4)	7.2 (27.3)	6.6 (25)	5.4 (20.4)	4.15 (15.7)	78.5 (5.5)	
			15 (4.6)	6.5 (24.6)	6.4 (24.2)	6.3 (23.8)	6.2 (23.5)	6.1 (23.1)	6.0 (22.7)	5.3 (20.1)	4.8 (18.2)	3.6 (13.6)	76.3 (5.4)	
			20 (6.1)	5.3 (20.1)	5.2 (19.7)	5.1 (19.3)	4.9 (18.5)	4.8 (18.2)	4.7 (17.8)	4.6 (17.4)	4.1 (15.5)	2.9 (11)	74.1 (5.2)	
			25 (7.6)	3.7 (14.0)	3.65 (13.8)	3.6 (13.6)	3.55 (13.4)	3.5 (13.2)	3.5 (13.2)	3.45 (13.1)	2.4 (9.1)	2.3 (8.7)	71.9 (5.1)	
558274	JP-050-C	1/2	5 (1.5)	12.8 (48.5)	12.5 (47.3)	12.3 (46.6)	12.1 (45.8)	11.2 (42.4)	9.5 (36)	6.9 (26.1)	4.3 (16.3)	2 (7.6)	64.2 (4.5)	
			10 (3.1)	11.5 (43.5)	11.3 (42.8)	11 (41.6)	10.8 (40.9)	10.4 (39.4)	8.5 (32.2)	6 (22.7)	3.4 (12.9)	1 (3.8)	62 (4.4)	
			15 (4.6)	9.8 (37.1)	9.7 (36.7)	9.6 (36.4)	9.5 (36)	9.4 (35.6)	7.3 (27.7)	4.7 (17.8)	2.2 (8.3)	–	59.9 (4.2)	
			20 (6.1)	8.3 (31.4)	8.1 (30.7)	7.8 (29.5)	7.7 (29.2)	7.6 (28.8)	5.7 (21.6)	3.5 (13.3)	1 (3.8)	–	57.7 (4.06)	
			25 (7.6)	5.6 (21.2)	5.5 (20.8)	5.5 (20.8)	5.4 (20.5)	5.3 (20.1)	4.1 (15.5)	2.3 (8.7)	0.2 (8)	–	55.5 (3.9)	
558275	JP-075-C	3/4	5 (1.5)	16.2 (61.3)	16 (60.6)	15.8 (59.8)	15.6 (59.1)	15.4 (58.3)	12.1 (45.8)	8.7 (33)	5.7 (21.6)	2.9 (11)	65 (4.6)	
			10 (3.1)	14.3 (54.1)	14 (53)	13.7 (51.9)	13.5 (51.1)	13.2 (50)	10.6 (40.1)	7.6 (28.8)	4.6 (17.4)	1.6 (6.1)	62.8 (4.4)	
			15 (4.6)	12.1 (45.8)	11.7 (44.3)	11.3 (42.8)	11 (41.7)	10.6 (40.1)	9.3 (35.2)	6.3 (23.9)	3.2 (12.1)	0.2 (8)	60.6 (4.3)	
			20 (6.1)	9.9 (37.5)	9.6 (36.3)	9.3 (35.2)	9 (34.1)	8.7 (33)	7.8 (29.5)	4.8 (18.2)	1.9 (7.2)	–	58.5 (4.1)	
			25 (7.6)	7.2 (27.3)	7.1 (26.9)	7 (26.5)	6.9 (26.1)	6.8 (25.8)	6.7 (25.4)	3.5 (13.3)	0.6 (2.3)	–	56.3 (4)	
558276	JP-100-C	1	5 (1.5)	24.8 (93.9)	24.7 (93.5)	23.2 (87.8)	19.8 (75)	16.5 (62.5)	13.1 (49.6)	9.5 (36)	6.3 (23.9)	3.4 (12.9)	0.5 (1.9)	66.2 (4.7)
			10 (3.1)	21.5 (81.4)	21.2 (80.3)	20.1 (76.1)	18.4 (69.7)	15.2 (57.6)	11.5 (43.6)	7.9 (29.9)	4.9 (18.6)	2.4 (9.1)	–	64.2 (4.5)
			15 (4.6)	18.1 (68.5)	17.8 (67.7)	17.4 (65.9)	16.7 (63.2)	13.8 (52.2)	10.3 (39)	6.9 (26.1)	4 (15.1)	1.3 (4.9)	–	62.1 (4.4)
			20 (6.1)	14.4 (54.5)	14.3 (54.2)	14.2 (53.8)	14.6 (55.3)	12.3 (46.7)	9 (34.1)	5.3 (20.1)	2.3 (8.7)	0.2 (8)	–	60.1 (4.2)
			25 (7.6)	10.5 (39.8)	10.5 (39.8)	10.4 (39.4)	10.3 (39)	8.8 (33.3)	7 (26.5)	4.2 (15.9)	1.3 (4.9)	–	–	57.2 (4)

# Shallow Well Jet Pumps Systems

## Applications

- For supplying pressurized fresh water to rural homes, farms, and cabins
- For use where the vertical distance from the water supply does not exceed 25 feet

## Features

- Cast iron casing and seal plate for durability and long life
- A.O. Smith higher than standard NEMA service factor dual compartment motors
- Pressure switch preset at 30/50 psi
- 1-1/4" (31.7 mm) suction
- Pressure gauge included with all models
- Heavy duty steel constructed tank
- Welded malleable water connection, will not break during installations
- Tank's butyl rubber diaphragm system isolates the air charge from system water
- Fully serviceable with two-year warranty
- Condensation-reducing design

## Series Specifications

**Discharge:** 1" NPT (25.4 mm)


**Electrical:** Dual Voltage 115/230



## Model Characteristics

Item #	Model	HP	Tank (Gal)	Length (in)	Width (in)	Height (in)	Ship Wt (lbs)
558277	JP-050-C/T9H	1/2	8.5	25	13	29	57
558278	JP-050-C/T14H	1/2	14	24	16	31	62

# Convertible Jet Pumps

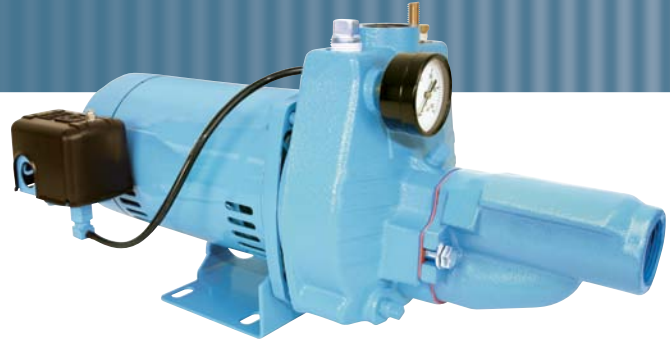

### Applications

- For supplying fresh water to rural homes, farms, and cabins
- For installations where the vertical distance from the pump to the pumping water level does not exceed 90 feet (27.4 m)

### Features

- Cast iron casing and seal plate for durability and long life
- A.O. Smith higher than standard NEMA service factor dual compartment motor
- Dual voltage 115/230 V
- Pressure switch preset at 30/50 psi
- 1-1/4" (31.7 mm) suction, 1" NPT (25.4 mm) discharge
- Brass flow control valve included
- Pressure gauge included with all models
- Stainless steel motor shaft and dual ball bearings
- Precision-engineered thermoplastic impeller, diffuser, nozzle, and venturi
- Injector kit included for both shallow and deep well installations
- Fully serviceable with two-year warranty

### Model Characteristics

Item #	Model	HP	Total Suction Lift (ft/m)	Pump Capacity GPM (LPM) Discharge Pressure in PSI										Max. Pressure in PSI (kg/cm <sup>2</sup> )
				20	25	30	35	40	45	50	55	60		
558281	JPC-050-C	1/2	Shallow	5 (1.5)	11.1 (42)	11 (41.6)	10.9 (41.3)	10.8 (40.9)	10.7 (40.5)	9.2 (34.8)	7.4 (28.1)	5.9 (22.4)	4.5 (17.1)	76.2 (5.3)
				15 (4.6)	8.1 (31.7)	8 (30.3)	7.9 (29.9)	7.8 (29.5)	7.7 (29.2)	7.3 (27.7)	5.9 (22.4)	4.4 (16.7)	3.1 (11.8)	71.7 (5.1)
				25 (7.6)	4.8 (18.2)	4.8 (18.2)	4.7 (17.8)	4.7 (17.8)	4.6 (17.4)	4.5 (17.1)	4.4 (16.7)	3.2 (12.1)	1.9 (7.2)	67.5 (4.8)
			Deep	20 (6.1)	–	10.7 (3.3)	9.2 (2.8)	7.8 (2.4)	6.5 (2.0)	5.4 (1.7)	4.5 (1.4)	3.6 (1.1)	2.9 (.9)	85 (5.8)
				50 (15.3)	–	6.8 (2.1)	5.8 (1.8)	4.8 (1.5)	4.0 (1.2)	3.2 (1)	2.4 (.08)	1.8 (.6)	1.3 (.4)	72 (5.1)
				80 (24.4)	–	4.1 (1.3)	3.4 (1.1)	2.8 (.85)	2.2 (.07)	1.6 (.49)	1 (.3)	0.4 (.01)	–	59 (4.2)

Item #	Model	HP	Total Suction Lift (ft/m)	Pump Capacity GPM (LPM) Discharge Pressure in PSI										Max. Pressure in PSI (kg/cm <sup>2</sup> )
				20	25	30	35	40	45	50	55	60		
558282	JPC-075-C	3/4	Shallow	5 (1.5)	18.2 (69)	17.9 (67.8)	17.7 (67)	16.6 (62.8)	14.3 (54.2)	12 (45.4)	9.7 (36.7)	7.4 (28)	5.1 (18.9)	71 (5)
				15 (4.6)	12.7 (48.1)	12.5 (47.3)	12.4 (47)	12.2 (46.2)	12 (45.5)	9.9 (37.5)	7.5 (28.4)	5.3 (20.1)	3 (11.4)	66.7 (4.7)
				25 (7.6)	7.7 (29.2)	7.5 (28.1)	7.4 (28)	7.1 (26.9)	6.9 (26.1)	6.7 (25.4)	5 (18.9)	3 (11.4)	1 (3.8)	62.4 (4.4)
			Deep	20 (6.1)	–	11.5 (43.6)	9.8 (37.1)	7.6 (28.8)	6.8 (25.8)	5.7 (21.6)	4.7 (17.8)	3.8 (14.4)	3 (11.4)	86 (6.1)
				50 (15.3)	–	7.4 (28)	6.1 (23.1)	5.1 (19.3)	4.1 (15.5)	3.3 (12.5)	2.5 (9.5)	1.9 (7.2)	1.3 (5)	73 (5.13)
				90 (27.5)	–	4.5 (17.1)	3.5 (13.3)	2.8 (10.6)	2.1 (8.0)	1.5 (5.7)	1.0 (3.8)	.5 (1.9)	–	60 (4.2)

Item #	Model	HP	Total Suction Lift (ft/m)	Pump Capacity GPM (LPM) Discharge Pressure in PSI										Max. Pressure in PSI (kg/cm <sup>2</sup> )
				20	25	30	35	40	45	50	55	60		
558283	JPC-100-C	1	Shallow	5 (1.5)	20.2 (76.4)	20.1 (76.1)	19.9 (75.3)	19.5 (73.8)	16.7 (63.2)	13.9 (52.6)	11.1 (42.0)	8.3 (31.4)	5.6 (21.2)	71 (5)
				15 (4.6)	14.5 (54.8)	14.3 (54.2)	14.1 (53.4)	13.8 (52.3)	13.6 (51.5)	11.4 (43.2)	8.7 (33)	6 (22.7)	3.3 (12.5)	66.7 (4.7)
				25 (7.6)	9.1 (34.5)	8.9 (33.7)	8.8 (33.3)	8.7 (33)	8.6 (32.6)	8.5 (32.2)	6 (22.7)	3.6 (13.6)	1.2 (4.6)	62.4 (4.4)
			Deep	20 (6.1)	–	12.8 (48.5)	10.5 (39.8)	8.7 (33)	7.3 (27.7)	6.6 (25)	5.2 (19.7)	4.4 (16.7)	3.6 (13.6)	87 (6.1)
				50 (15.3)	–	8.4 (31.8)	7.2 (27.3)	6 (22.7)	5 (18.9)	4.2 (15.9)	3.4 (12.9)	2.6 (9.9)	1.9 (7.2)	74 (5.2)
				90 (27.5)	–	4.3 (16.3)	3.4 (12.9)	2.7 (10.2)	1.9 (7.2)	1.8 (6.8)	.7 (2.7)	–	–	56.7 (4)



# Convertible Jet Pumps Systems

## Applications

- For supplying pressurized fresh water to rural homes, farms, and cabins
- For use where the vertical distance from the water supply does not exceed 90 feet (27.4 m)
- Injector can be attached to the pump casing for shallow well performance

## Features

- Cast iron casing and seal plate for durability and long life
- A.O. Smith higher than standard NEMA service factor dual compartment motors
- Square D pressure switch preset at 30/50 psi
- 1-1/4" (31.7 mm) suction and brass flow control valve
- Pressure gauge included with all models
- Heavy duty steel constructed tank
- Welded malleable water connection, will not break during installations
- Tank's butyl rubber diaphragm system isolates the air charge from system water
- Fully serviceable with two-year warranty
- Condensation-reducing design



## Model Characteristics

Item #	Model	HP	Tank (Gal)	Length (in)	Width (in)	Height (in)	Ship Wt (lbs)
558287	JP-050-C/T9H	1/2	8.5	25	13	29	57

# Injector Kits



## Model Characteristics

Item #	Model	Description
305446946	1/2 Injector Kit	Injector Kit for JPC-050-C
305446947	3/4 Injector Kit	Injector Kit for JPC-075-C/JPC-100-C

# Utility Jet Pumps

## Applications

- For pressure boosting, small underground lawn sprinklers, and a multitude of other general purpose clean water applications

## Features


- Cast iron casing and seal plate ensures durability and long life
- A.O. Smith higher than standard NEMA service factor dual compartment motors; single-phase, square flange design with threaded motor shaft
- 3600 rpm, open drip proof motor with capacitor start and thermal overload protection
- Precision-engineered glass filled thermoplastic impeller
- Includes garden hose adapter, venturi, and built-in nozzle
- 8 ft grounded power cord
- Fully serviceable with two-year warranty




## Model Characteristics

Item #	Model	HP	Total Suction Lift (ft/m)	Pump Capacity GPM (LPM) Discharge Pressure in PSI									Shut-Off Head in feet (m)
				20	25	30	35	40	45	50	55	60	
558280	JPU-050-C	1/2	5 (1.5)	12.8 (48.5)	12.5 (47.3)	12.3 (46.6)	12.1 (45.8)	11.2 (42.4)	9.5 (36)	6.9 (26.1)	4.3 (16.3)	2.0 (7.6)	64.2 (19.6)
			10 (3.1)	11.5 (43.5)	11.3 (42.8)	11 (41.6)	10.8 (44.9)	10.4 (39.4)	8.5 (32.2)	6.0 (22.7)	3.4 (12.9)	1.0 (3.8)	62.0 (18.9)
			15 (4.6)	9.8 (31.1)	9.7 (36.7)	9.6 (36.3)	9.5 (36)	9.4 (35.6)	7.3 (27.6)	4.7 (17.8)	2.2 (8.3)	–	59.9 (18.3)
			20 (6.1)	8.3 (31.4)	8.1 (30.7)	7.8 (29.5)	7.7 (29.1)	7.6 (28.8)	5.7 (21.6)	3.5 (13.2)	1.0 (3.8)	–	57.7 (17.6)
			25 (7.6)	5.6 (21.2)	5.5 (20.8)	5.5 (20.8)	5.4 (20.4)	5.3 (20.1)	4.7 (17.8)	2.3 (8.7)	0.2 (0.8)	–	55.5 (16.9)

## Performance Curve

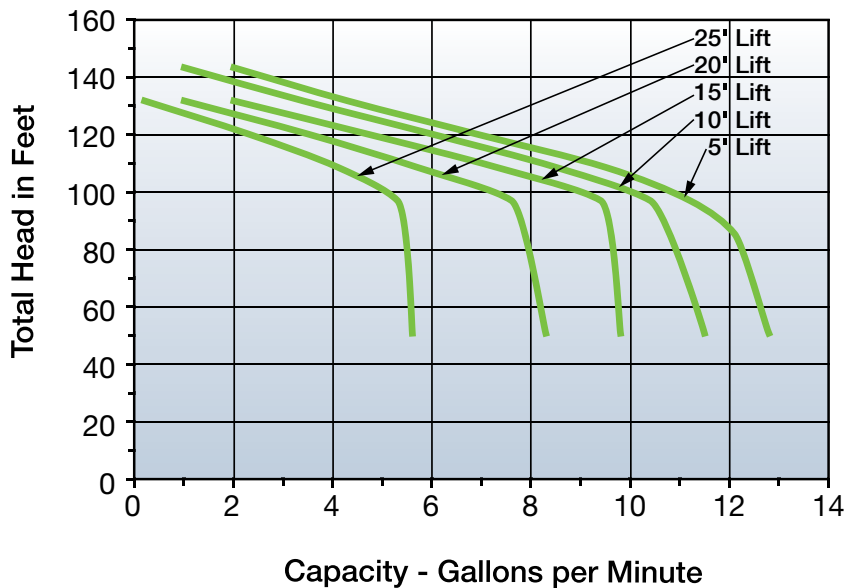

# LSP SERIES

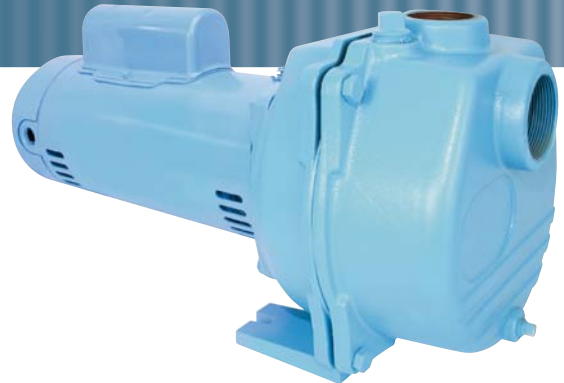



### Applications

- For both residential and commercial lawn and turf sprinkler systems, irrigation, gardens, and general water transfer

### Features

- Self priming
- Cast iron casing and seal plate for durability and long life
- Single-phase capacitor start, 115/230 dual voltage on 3/4 hp, 1 hp and 1-1/2 hp models. Higher than standard NEMA service factors (230 V on 2 hp model)
- Standard 5/8" rotating mechanical seal, for a reliable seal against water leakage
- 2" NPT (51 mm) suction, 1-1/2" NPT (38 mm) discharge
- Priming plug to facilitate priming
- Drain plug for easy drainage of pump
- Fully serviceable with two-year warranty
- 2 hp model uses a brass impeller

### Performance Curve

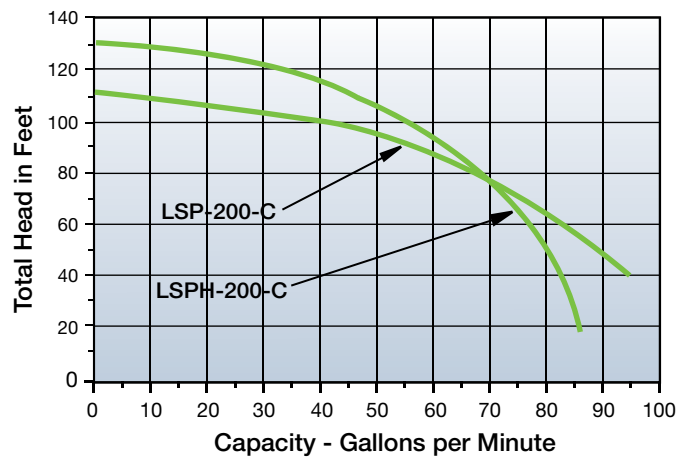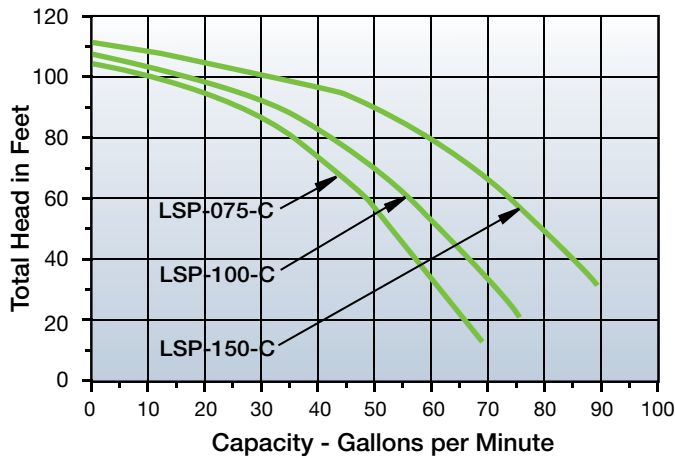

### Model Characteristics

Item #	Model	HP	Pump Capacity GPM (LPM) Discharge Pressure in PSI @ 5' (1.5 m) Lift				Max. Pressure in PSI (kg/cm <sup>2</sup> )
			10	20	30	40	
558297	LSP-075-C	3/4	63 (238.5)	52 (196.8)	40 (151.4)	12 (45.4)	45 (3.2)
558294	LSP-100-C	1	72 (272.5)	62 (234.7)	46 (174.1)	20 (75.7)	46 (3.3)
558295	LSP-150-C	1-1/2	90 (340.7)	80 (302.9)	64 (242.3)	40 (151.4)	47 (3.3)
558296	LSP-200-C	2	97 (367.2)	90 (340.7)	74 (280.1)	47 (177.9)	48 (3.4)
558298	LSPH-200-C	2	84 (318)	81 (306.6)	73 (276.3)	58 (219.6)	57 (4.1)

## End Suction Centrifugal Pumps

# CP SERIES

### Applications


- For water transfer, booster, and lift applications for irrigation

### Features

- 115/230 V 60 Hz (2 hp is 230 V Only)
- 3600 rpm, single-phase; square flange motor
- Thermal overload protection and higher than standard NEMA service factor
- Glass-filled thermoplastic impeller for increased efficiency
- Large drain hole and shaft flinger in adapter bracket prevents moisture from damaging bearings
- Ports for air bleeding when priming and drainage to prevent frost damage
- Fully serviceable with two-year warranty



### Performance Curve

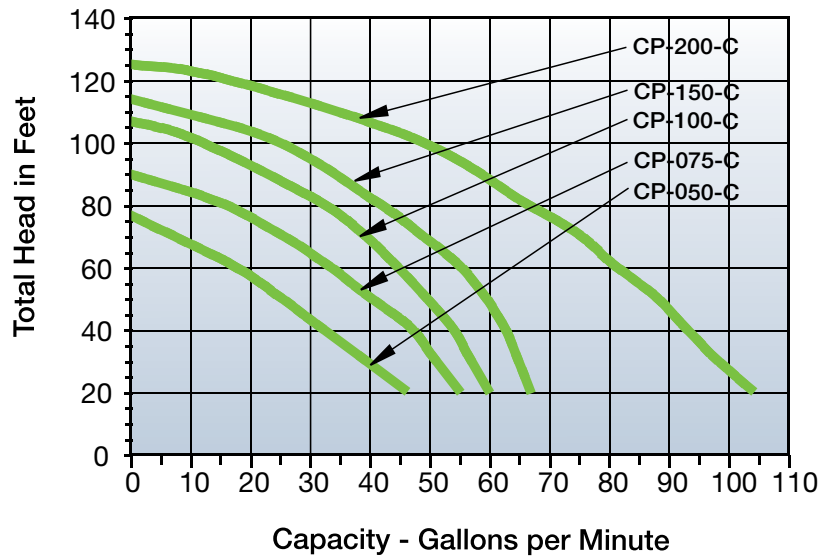

### Model Characteristics

Item #	Model	HP	Suction NPT	Discharge NPT	Total Head in Feet Capacities in U.S. GPM (LPM)								
					20	30	40	50	60	70	80	100	120
558240	CP-050-C	1/2	1-1/4"	1"	46 (174)	38 (144)	32 (121)	24 (91)	15 (57)	–	–	–	–
558241	CP-075-C	3/4	1-1/4"	1"	55 (208)	52 (197)	47 (178)	38 (144)	32 (121)	25 (95)	15 (57)	–	–
558242	CP-100-C	1	1-1/4"	1"	60 (227)	57 (216)	54 (205)	49 (186)	44 (167)	39 (148)	32 (121)	12 (46)	–
558243	CP-150-C	1-1/2	1-1/4"	1"	67 (254)	65 (246)	63 (239)	59 (224)	54 (205)	49 (186)	39 (148)	24 (91)	–
558244	CP-200-C	2	1-1/2"	1-1/4"	104 (394)	97 (367)	92 (348)	88 (333)	81 (307)	75 (284)	66 (250)	48 (182)	15 (57)

# RL SERIES



### Applications

- For well water storage
- For pressure-boosting applications in homes, mobile homes, and office buildings

### Features

- Vertical and horizontal tanks
- Heavy-duty steel construction
- Appliance-quality paint finish over primer coat
- Welded malleable water connection, will not break during installations
- Butyl rubber diaphragm system isolates the air charge from system water
- Condensation-reducing design
- Five-year warranty
- ANSI/NSF standard 61 approved

### Performance Curve

Item #	Model	Diameter		Length		System Connect	Volume		Shipping (Box) Volume		Shipping Weight	
		in	cm	in	cm		gal	liter	cu. ft	cu. m	lbs	Kg
604452	RL2	8	20	12	30	3/4" FNPT	2.1	8	0.5	0.02	5	2.3
604453	RL4	11	27.8	14.5	37	3/4" FNPT	4.8	18.2	1.1	0.03	10	4.6
604529	RL6H	11.4	28.9	17.5	44.4	3/4" FNPT	5.3	20	1.5	0.04	13.3	6
604493	RL14H	16.3	41.4	20.8	52.8	3/4" FNPT	14	53	3.7	0.11	27	12.3
604457	RL20	16	40.6	29	73.7	1" NPT	20	75.7	4.73	0.13	35	15.9
604449	RL33	16	40.6	42.75	108.6	1" NPT	33	124.9	6.93	0.2	55	25
604459	RL44	21	53.3	36.25	92.1	1-1/4" NPT	44	166.5	10.17	0.11	65	29.5
604530	RL62	21	53.3	48	122	1-1/4" NPT	62	234.7	7.6	0.22	82	37.2
604541	RL81	21	53.3	62	157.5	1-1/4" NPT	81	306.6	16.5	0.46	104	47.2
604542	RL85	26	66	44.5	113	1-1/4" NPT	85	321.8	8.3	0.24	121	54.9
604531	RL119	26	66	59.75	150.5	1-1/4" NPT	119	450.5	26.2	0.73	160	72.6

Total drawdown assumes tank pre-charge set at 2 psi below cut-in pressure. Drawdown can be affected by many factors, including temperature, pressure and elevation.

### Quick Sizing Chart

Model	Total Tank Volume		Total Drawdown					
			20/40		30/50		40/60	
	Gallons	Liters	Gallons	Liters	Gallons	Liters	Gallons	Liters
RL2	2.1	8	0.8	2.9	0.78	2.5	0.6	2.1
RL4	4.8	18.2	1.7	6.6	1.5	506	1.3	4.8
RL6H	5.3	20	1.9	7.3	1.6	6.2	1.4	5.4
RL14H	14	53	5.1	19.3	4.8	18.1	3.8	14.2
RL20	20	80	8.1	30.5	6.8	25.8	5.9	22.3
RL33	33	130	13.3	50.3	11.3	42.6	9.7	36.8
RL44	44	170	17.7	67.1	15	56.8	13	49.1
RL62	62	234.7	25	94.6	21.1	117.7	18.3	69.3
RL81	81	306.6	32.6	123.4	27.6	104.5	23.9	90.5
RL85	85	321.8	34.3	129.8	29	109.8	25.1	95
RL119	119	450.5	48	181.7	40.6	153.7	35.1	132.9

Total drawdown assumes tank pre-charge set at 2 psi below cut-in pressure. Drawdown can be affected by many factors, including temperature, pressure and elevation.






# RL SERIES

## Tank Replacement Guide

Flexcon				Amtrol				Goulds A.O. Smith	State Perma Tank	WellMate	Pro-Source	Standard Galvanized
Little Giant	Challenger	Well-Rite	H2 Pro	Well-X-Trol	Wel-Flow	Champion	How 2 Tank					
RL2	PRJ6	PJR6	PJR6	WX-101	WF-6	CM1001	HT20	V6P	PIL-2	WM8L	N/A	5 gal
RL6H	PJR20S	PJR20S	PJR20S	WX105	N/A	N/A	N/A	N/A	N/A	WM25L	PS15-502	18 gal
RL20	PC66	WR60	WWT-20	WX-202	WF60	CM4202	HT20	V60	PAD-20	WM6	PS42T-T02	42 gal
RL33	PC122	WR120	WWT-35	WX-203	WF1100	CM8003	HT32	V100	WM9	WM9	PS82T-T05	82 gal
RL44	PC144	WR140	WWT-45	WX-250	WF140	CM10050	HT44	V140	WM14	WM14	PS120-T50	82 gal
RL62	PC211	WR200	WWT-65	WX-251	WF200	CM12051	HT44	V200	PAD-52	WM20	PS200-T51	220 gal
RL85	PC266	WR260	WWT-85	WX-302	WF260	CM17002	HT86	V250	PAD-86	WM25L	PS220-T52	220 gal
RL119	PC366	WR360	WWT-120	WX-350	WF360	CM22050	HT119	V350	PAD-119	WM35	N/A	315 gal

Add "S" for horizontal models with pump stand. All models: 20 psi/1.9 bar pre-charge. Maximum Working Pressure: All models 125 psi/8.5 bar. Maximum Working Temperature: All models 140 ° F/60 ° C



## Tank Sizing Information

There are three factors to consider when selecting the proper size for your water system:

- The pump delivery rate in gallons/liters per minute (gpm/lpm).
- The recommended minimum running time of the pump.
- The minimum (cut-in) and maximum (cut-out) system pressure parameters.

Once these factors are known, the following calculations will determine, in most cases, the correct model to meet your specifications.\*

Calculating Drawdown

- 1) Pump delivery rate. \_\_\_\_\_ gpm/lpm
- 2) Desired minimum pump running time in minutes \_\_\_\_\_ Minutes  
(1 minute, 45 seconds = 1.75 minutes).
- 3) Multiply line #1 by line #2. \_\_\_\_\_ Gallons/Liters  
This is the minimum drawdown or available water volume required.\*

Calculating Tank Size

- 4) Minimum system pressure (cut-in). \_\_\_\_\_ PSIG/kPa/bar
- 5) Maximum system pressure (cut-out). \_\_\_\_\_ PSIG/kPa/bar
- 6) Using table #2, find the drawdown factor applicable to lines #4 and #5. \_\_\_\_\_ Factor
- 7) Divide line #3 by line #6 to determine the minimum total volume required. \_\_\_\_\_ Gallons/Liters
- 8) Refer to the design data and select the model with the lowest total capacity that is greater than or equal to line #7. \_\_\_\_\_ Model

Example: An application using an 8 gpm pump with a minimum run time of 1 minute and a 30/50 PSIG system pressure range:

$$\frac{8 \text{ gpm} \times 1 \text{ minute}}{.30 \text{ (factor)}} = 26.7 \text{ gallon minimum tank capacity}$$

\*If a volume of water needed is greater than the amount calculated on line #3, enter that amount on line #3 in place of the calculated volume.

## Draw Down Factors

Maximum System Pressure (Cut-Out) PSIG/(kPa)/bar	Minimum System Pressure (Cut-In) -- PSIG/(kPa)/bar																			
	20 (138)	25 (173)	30 (207)	35 (242)	40 (276)	45 (311)	50 (345)	55 (380)	60 (414)	65 (449)	70 (483)	75 (518)	80 (552)	85 (587)	90 (621)	95 (656)	100 (690)	105 (725)	110 (759)	
30/(207)/2.06	.21																			
35/(242)/2.41	.28	.19																		
40/(276)/2.76	.34	.26	.17																	
45/(311)/3.10	.39	.32	.24	.16																
50/(345)/3.45	.44	.37	.30	.22	.15															
55/(380)/3.80	.47	.41	.34	.28	.21	.14														
60/(414)/4.16	.50	.44	.38	.32	.26	.19	.13													
65/(449)/4.48	.53	.48	.42	.36	.30	.24	.18	.12												
70/(483)/4.83	.56	.50	.45	.40	.34	.29	.23	.17	.11											
75/(518)/5.17		.53	.48	.43	.38	.32	.27	.22	.16	.11										
80/(552)/5.51			.50	.46	.41	.36	.31	.26	.21	.15	.10									
85/(587)/5.86				.48	.43	.39	.34	.29	.24	.20	.15	.10								
90/(621)/6.20					.46	.42	.37	.32	.28	.23	.19	.14	.09							
95/(656)/6.55						.44	.40	.35	.31	.27	.22	.18	.13	.09						
100/(690)/6.89							.42	.38	.34	.30	.26	.21	.17	.13	.09					
105/(725)/7.24								.41	.37	.33	.29	.25	.20	.16	.13	.08				
110/(759)/7.58									.39	.35	.31	.27	.24	.20	.16	.12	.08			
115/(794)/7.92										.38	.34	.30	.26	.23	.19	.15	.11	.08		
120/(828)/8.27											.36	.33	.29	.25	.22	.18	.15	.11	.07	
125/(863)/8.62												.35	.32	.28	.25	.21	.18	.14	.11	

In keeping with current industry standards, drawdown factors are based on Boyle's law. Actual drawdowns will vary depending upon system variables, including the accuracy and operation of the pressure switch and gauge, actual precharge pressure and operating temperature of the system.

## 4" Submersible Well Pumps

# 5 GPM

## Thermoplastic and Stainless Steel

### Applications

- For both new installs and replacement applications where water must be transferred under pressure from wells, cisterns, ponds, lakes, and streams

### Features

- 1/2 hp to 1 hp single-phase motors
- Removable suction screen prevents debris from clogging impellers and provides full-flow performance
- Hex rubber bearing has multi-flow channels to keep small particles away from bearing surface
- Built-in Flomatic™ check valve assembly provides positive seal, preventing system drain-back
- Stainless steel bearing sleeve
- Acetal disk facilitates close tolerances for increased performance
- Stainless steel up-thrust washer prevents excessive wear in severe applications
- Two-year limited warranty

### Series Specifications

**Capacity:** 5 gpm (19 lpm)

**Discharge:** 1-1/4" FNPT (31.7 mm)

**Electrical:** 115 V, 230 V



### Model Characteristics

#### Thermoplastic Discharge

Item #	Model	HP	Stages	Volts	Wire	Shut Off (ft)	Weight (lbs)	Quick Disconnect Control Box (QD)	Capacitor Run Control Box (CRC)
558551	W5G05S13-21P	1/2	13	115	2	364 (110.9 m)	26	–	–
558537	W5G05S13-22P	1/2	13	230	2	364 (110.9 m)	26	–	–
558554	W5G05S13-32P	1/2	13	230	3	364 (110.9 m)	25	558814	558815
558552	W5G07S18-22P	3/4	18	230	2	528 (160.9 m)	29	–	–
558555	W5G07S18-32P	3/4	18	230	3	528 (160.9 m)	30	558823	558824
558553	W5G10S21-22P	1	21	230	2	614 (187.1 m)	33	–	–
558556	W5G10S21-32P	1	21	230	3	614 (187.1 m)	34	558833	558834


#### Stainless Steel Discharge

Item #	Model	HP	Stages	Volts	Wire	Shut Off (ft)	Weight (lbs)	Quick Disconnect Control Box (QD)	Capacitor Run Control Box (CRC)
558575	W5G05S13-21S	1/2	13	115	2	364 (110.9 m)	26	–	–
558599	W5G05S13-22S	1/2	13	230	2	364 (110.9 m)	26	–	–
558578	W5G05S13-32S	1/2	13	230	3	364 (110.9 m)	25	558814	558815
558576	W5G07S18-22S	3/4	18	230	2	528 (160.9 m)	29	–	–
558579	W5G07S18-32S	3/4	18	230	3	528 (160.9 m)	30	558823	558824
558577	W5G10S21-22S	1	21	230	2	614 (187.1 m)	33	–	–
558580	W5G10S21-32S	1	21	230	3	614 (187.1 m)	34	558833	558834

# 5 GPM

Thermoplastic and Stainless Steel

Performance Curve

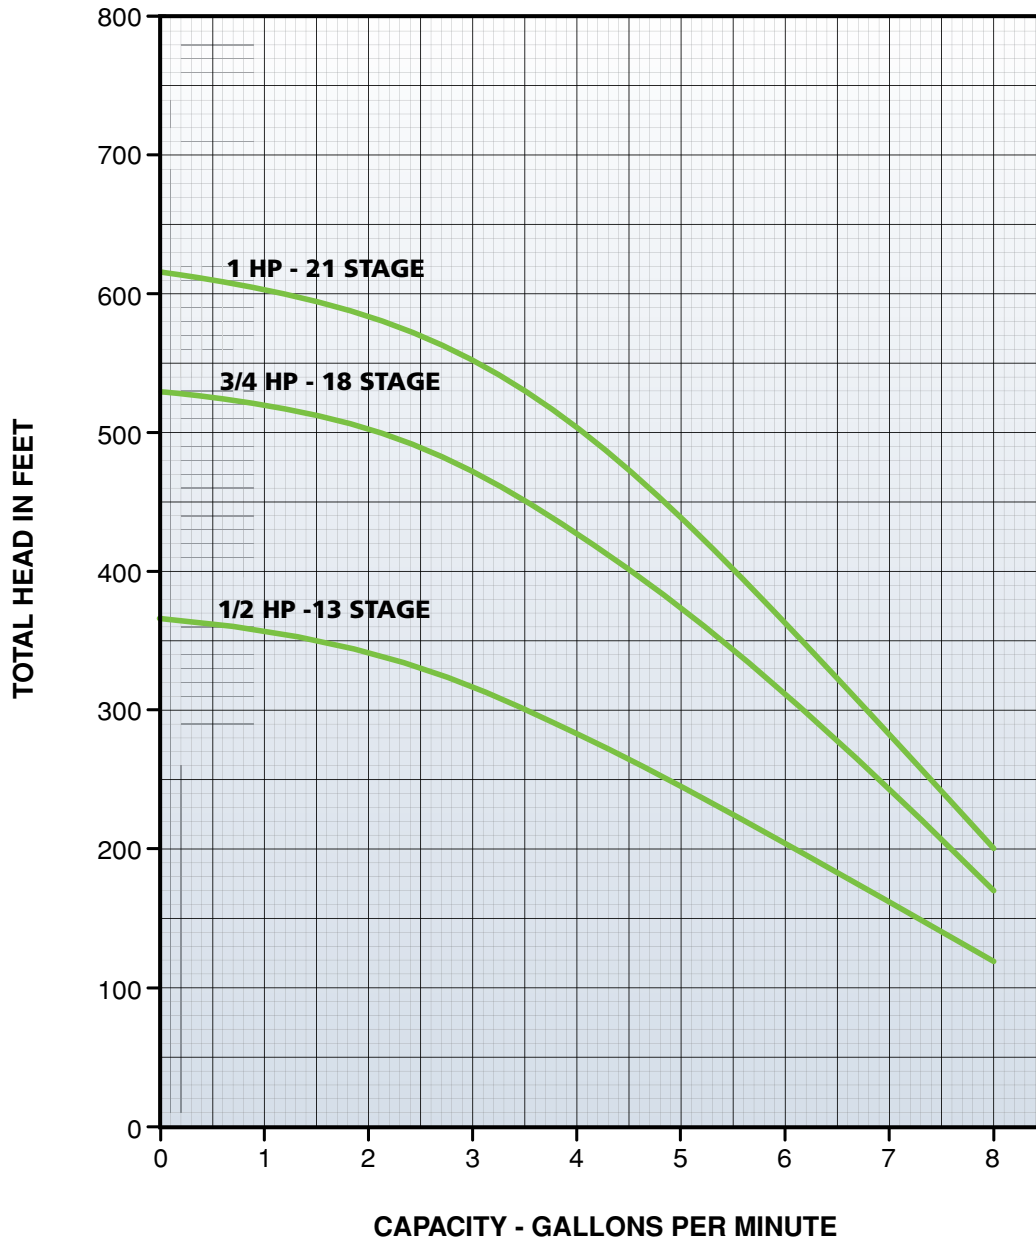



## 4" Submersible Well Pumps

# 5 GPM

## Thermoplastic and Stainless Steel

### Capacities in U.S. Gallons per Minute – 5 GPM

Model	HP	Stg.	PSI	Depth to Pumping Water Level in Feet																			Max. Press.						
				20	40	60	80	100	120	140	160	180	200	240	260	300	340	360	400	440	480	500	600	700	PSI	Feet			
W5G05S13	1/2	13	0						8	7	7	6	6	5	4	3										156	364		
			20				7	7	6	6	5	5	4	3	3	2													
			30			7	7	6	6	5	5	4	4	3	2														
			40		7	7	6	6	5	5	4	4	3	2															
			50	7	7	6	6	5	5	4	4	3	2																
			60	7	6	6	5	5	4	4	3	2																	
			80	6	5	5	4	4	3	2	1																		
Shut Off PSI				149	140	131	122	114	105	96	88	79	70	53	45	27													

Model	HP	Stg.	PSI	Depth to Pumping Water Level in Feet																			Max. Press.						
				20	40	60	80	100	120	140	160	180	200	240	260	300	340	360	400	440	480	500	600	700	PSI	Feet			
W5G07S18	3/4	18	0									7	7	7	6	6	5	5	4	3					229	528			
			20							7	7	7	6	6	6	5	4	4	3	2									
			30					8	7	7	7	6	6	6	5	5	4	4	2										
			40				8	7	7	7	6	6	6	5	5	4	3	3											
			50			7	7	7	6	6	6	6	5	5	5	4	3	2											
			60	7	7	7	7	6	6	6	6	5	5	5	4	3	2												
			80	7	7	6	6	6	6	5	5	5	4	4	3	3													
Shut Off PSI				220	211	203	194	185	177	168	159	151	142	125	116	99	81	73	55	38									

Model	HP	Stg.	PSI	Depth to Pumping Water Level in Feet																			Max. Press.						
				20	40	60	80	100	120	140	160	180	200	240	260	300	340	360	400	440	480	500	600	700	PSI	Feet			
W5G10S21	1	21	0									8	7	7	6	6	6	5	5	4	4				266	614			
			20							7	7	7	6	6	6	5	5	5	4	3	2								
			30							7	7	7	6	6	6	5	5	5	4	3	2	2							
			40						7	7	7	6	6	6	6	5	5	4	4	3	2	1							
			50					7	7	7	6	6	6	6	5	5	5	4	4	3	2	1							
			60				7	7	7	6	6	6	6	5	5	5	4	4	3	1									
			80	7	7	7	7	6	6	6	6	6	5	5	5	4	3	3	2										
Shut Off PSI				257	248	239	231	222	213	205	196	187	179	161	153	135	118	109	92	75	58	49							

## 4" Submersible Well Pumps

# 8 GPM

## Thermoplastic and Stainless Steel

### Applications

- For both new installs and replacement applications where water must be transferred under pressure from wells, cisterns, ponds, lakes, and streams

### Features

- 1/2 hp to 1 hp single-phase motors
- Removable suction screen prevents debris from clogging impellers and provides full-flow performance
- Hex rubber bearing has multi-flow channels to keep small particles away from bearing surface
- Built-in Flomatic™ check valve assembly provides positive seal, preventing system drain-back
- Stainless steel bearing sleeve
- Acetal disk facilitates close tolerances for increased performance
- Stainless steel up-thrust washer prevents excessive wear in severe applications
- Two-year limited warranty

### Series Specifications

**Capacity:** 8 gpm (30 lpm)

**Discharge:** 1-1/4" FNPT (31.7 mm)

**Electrical:** 115 V, 230 V



### Model Characteristics

#### Thermoplastic Discharge

Item #	Model	HP	Stages	Volts	Wire	Shut Off (ft)	Weight (lbs)	Quick Disconnect Control Box (QD)	Capacitor Run Control Box (CRC)
558557	W8G05S9-21P	1/2	9	115	2	280 (85.3 m)	24	–	–
558558	W8G05S9-22P	1/2	9	230	2	280 (85.3 m)	24	–	–
558561	W8G05S9-32P	1/2	9	230	3	280 (85.3 m)	24	558814	558815
558559	W8G07S12-22P	3/4	12	230	2	374 (113.9 m)	28	–	–
558562	W8G07S12-32P	3/4	12	230	3	374 (113.9 m)	28	558823	558824
558560	W8G10S15-22P	1	15	230	2	450 (137.1 m)	33	–	–
558563	W8G10S15-32P	1	15	230	3	450 (137.1 m)	33	558833	558834


#### Stainless Steel Discharge

Item #	Model	HP	Stages	Volts	Wire	Shut Off (ft)	Weight (lbs)	Quick Disconnect Control Box (QD)	Capacitor Run Control Box (CRC)
558581	W8G05S9-21S	1/2	9	115	2	280 (85.3 m)	24	–	–
558582	W8G05S9-22S	1/2	9	230	2	280 (85.3 m)	24	–	–
558585	W8G05S9-32S	1/2	9	230	3	280 (85.3 m)	24	558814	558815
558583	W8G07S12-22S	3/4	12	230	2	374 (113.9 m)	28	–	–
558586	W8G07S12-32S	3/4	12	230	3	374 (113.9 m)	28	558823	558824
558584	W8G10S15-22S	1	15	230	2	450 (137.1 m)	33	–	–
558587	W8G10S15-32S	1	15	230	3	450 (137.1 m)	33	558833	558834

# 8 GPM

Thermoplastic and Stainless Steel

Performance Curve

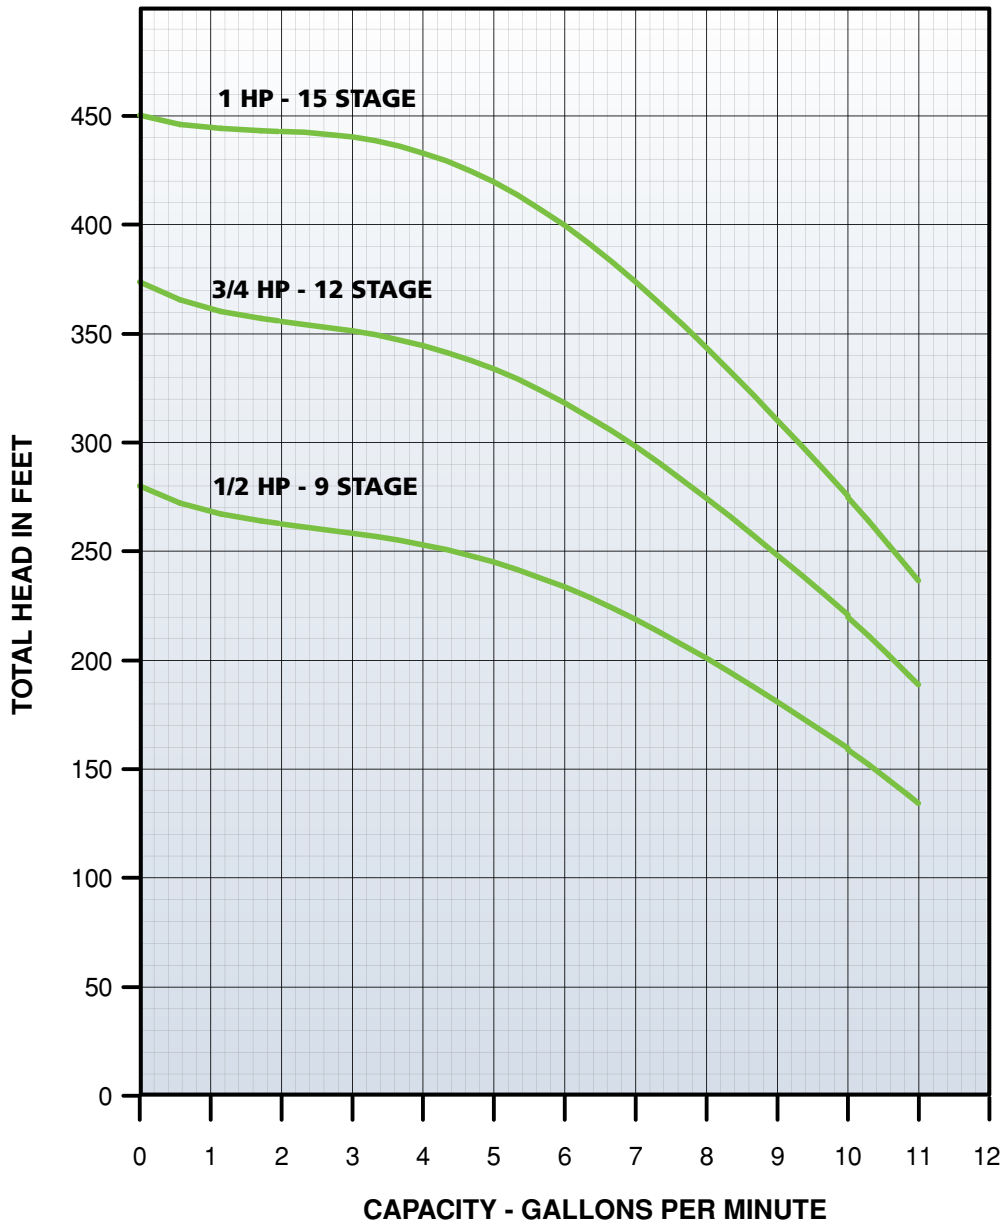

## 4" Submersible Well Pumps

# 8 GPM

## Thermoplastic and Stainless Steel

### Capacities in U.S. Gallons per Minute – 8 GPM

Model	HP	Stg.	PSI	Depth to Pumping Water Level in Feet																	Max. Press.						
				20	40	60	80	100	120	140	160	180	200	250	300	380	350	400	450	500	PSI	Feet					
W8G05S9	1/2	9	0									10.0	9.0	8.0	4.3							115	280				
			20						9.7	8.7	7.7	6.6	4.8														
			30					9.5	8.5	7.6	6.4	4.4															
			40				9.4	8.4	7.4	6.2	4.0																
			50			9.2	8.2	7.3	5.9	3.5																	
			60		9.0	8.1	7.1	5.7	2.9																		
			80	7.8	6.7	5.0																					
Shut Off PSI				113	104	95	87	78	69	61	52	43	35	13													

Model	HP	Stg.	PSI	Depth to Pumping Water Level in Feet																	Max. Press.						
				20	40	60	80	100	120	140	160	180	200	250	300	380	350	400	450	500	PSI	Feet					
W8G07S12	3/4	12	0											9.0	6.9	3.0						152	374				
			20									9.8	9.1	7.1	3.4												
			30								9.7	9.0	8.3	5.8													
			40							9.6	8.9	8.2	7.3	3.8													
			50						9.5	8.8	8.0	7.2	6.0														
			60					9.4	8.7	7.9	7.0	5.8	4.2														
			80		9.9	9.2	8.5	7.7	6.7	5.4	3.6																
Shut Off PSI				153	145	136	127	119	110	101	93	84	75	54	32	10											

Model	HP	Stg.	PSI	Depth to Pumping Water Level in Feet																	Max. Press.						
				20	40	60	80	100	120	140	160	180	200	250	300	380	350	400	450	500	PSI	Feet					
W8G10S15	1	15	0												9.2	7.9	6.1					186	450				
			20											9.3	8.0	6.3											
			30											10.0	8.7	7.4	4.8										
			40										9.9	9.4	8.1	6.5	2.4										
			50									9.9	9.3	8.8	7.5	5.1											
			60									9.8	9.2	8.7	8.2	6.7	2.9										
			80					9.6	9.0	8.5	8.0	7.5	6.8	3.4													
Shut Off PSI				186	178	169	160	152	143	134	126	117	108	87	65	43	22										

## 4" Submersible Well Pumps

# 12 GPM

## Thermoplastic and Stainless Steel

### Applications

- For both new installs and replacement applications where water must be transferred under pressure from wells, cisterns, ponds, lakes, and streams

### Features

- 1/2 hp to 1-1/2 hp single-phase motors
- Removable suction screen prevents debris from clogging impellers and provides full-flow performance
- Hex rubber bearing has multi-flow channels to keep small particles away from bearing surface
- Built-in Flomatic™ check valve assembly provides positive seal, preventing system drain-back
- Stainless steel bearing sleeve
- Acetal disk facilitates close tolerances for increased performance
- Stainless steel up-thrust washer prevents excessive wear in severe applications
- Two-year limited warranty

### Series Specifications

**Capacity:** 12 gpm (45 lpm)

**Discharge:** 1-1/4" FNPT (31.7 mm)

**Electrical:** 115 V, 230 V



### Model Characteristics

#### Thermoplastic Discharge

Item #	Model	HP	Stages	Volts	Wire	Shut Off (ft)	Weight (lbs)	Quick Disconnect Control Box (QD)	Capacitor Run Control Box (CRC)	Standard Capacitor Start Capacitor Run Control Box
558564	W12G05S7-21P	1/2	7	115	2	240 (73.1 m)	24	—	—	—
558536	W12G05S7-31P	1/2	7	115	3	240 (73.1 m)	24	2801044915	—	—
558565	W12G05S7-22P	1/2	7	230	2	240 (73.1 m)	24	—	—	—
558569	W12G05S7-32P	1/2	7	230	3	240 (73.1 m)	24	558814	558815	—
558566	W12G07S9-22P	3/4	9	230	2	295 (89.9 m)	28	—	—	—
558570	W12G07S9-32P	3/4	9	230	3	295 (89.9 m)	28	558823	558824	—
558567	W12G10S12-22P	1	12	230	2	395 (120.3 m)	31	—	—	—
558571	W12G10S12-32P	1	12	230	3	395 (120.3 m)	32	558833	558834	—
558568	W12G15S17-22P	1-1/2	17	230	2	560 (170.6 m)	38	—	—	—
558572	W12G15S17-32P	1-1/2	17	230	3	560 (170.6 m)	39	—	—	558842


#### Stainless Steel Discharge

Item #	Model	HP	Stages	Volts	Wire	Shut Off (ft)	Weight (lbs)	Quick Disconnect Control Box (QD)	Capacitor Run Control Box (CRC)	Standard Capacitor Start Capacitor Run Control Box
558588	W12G05S7-21S	1/2	7	115	2	240 (73.1 m)	24	—	—	—
558600	W12G05S7-31S	1/2	7	115	3	240 (73.1 m)	24	2801044915	—	—
558589	W12G05S7-22S	1/2	7	230	2	240 (73.1 m)	24	—	—	—
558593	W12G05S7-32S	1/2	7	230	3	240 (73.1 m)	24	558814	558815	—
558590	W12G07S9-22S	3/4	9	230	2	295 (89.9 m)	28	—	—	—
558594	W12G07S9-32S	3/4	9	230	3	295 (89.9 m)	28	558823	558824	—
558591	W12G10S12-22S	1	12	230	2	395 (120.3 m)	31	—	—	—
558595	W12G10S12-32S	1	12	230	3	395 (120.3 m)	32	558833	558834	—
558592	W12G15S17-22S	1-1/2	17	230	2	560 (170.6 m)	38	—	—	—
558596	W12G15S17-32S	1-1/2	17	230	3	560 (170.6 m)	39	—	—	558842

# 12 GPM

Thermoplastic and Stainless Steel

Performance Curve

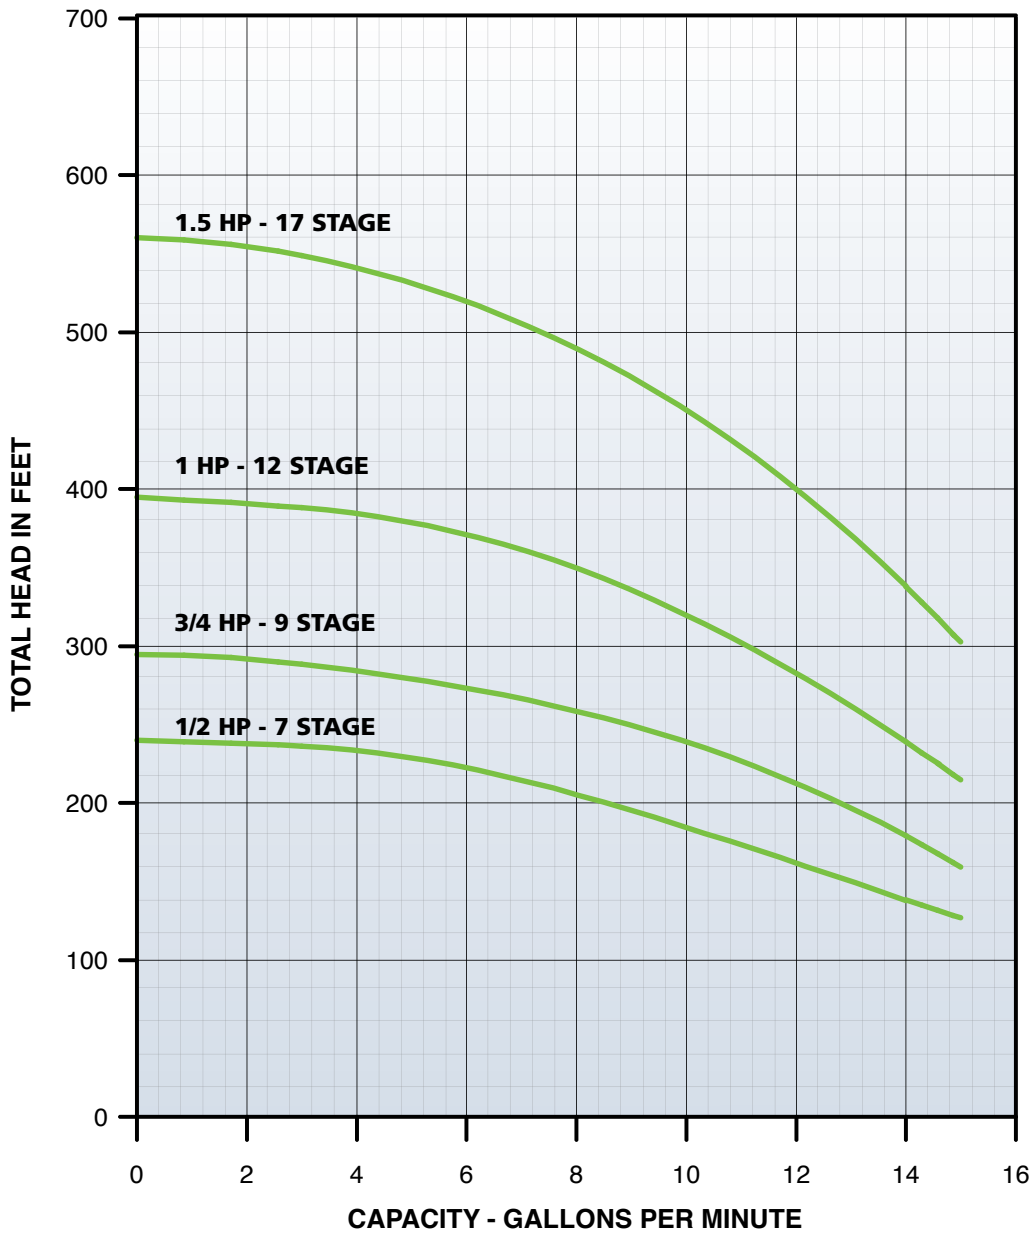



## 4" Submersible Well Pumps

# 16 GPM

## Thermoplastic and Stainless Steel

### Applications

- For both new installs and replacement applications where water must be transferred under pressure from wells, cisterns, ponds, lakes, and streams

### Features

- 3/4 to 1-1/2 hp single-phase motors
- Removable suction screen prevents debris from clogging impellers and provides full-flow performance
- Hex rubber bearing has multi-flow channels to keep small particles away from bearing surface
- Built-in Flomatic™ check valve assembly provides positive seal, preventing system drain-back
- Stainless steel bearing sleeve
- Acetal disk facilitates close tolerances for increased performance
- Stainless steel up-thrust washer prevents excessive wear in severe applications
- Two-year limited warranty

### Series Specifications

**Capacity:** 16 gpm (61 lpm)

**Discharge:** 1-1/4" FNPT (31.7 mm)

**Electrical:** 230 V



### Model Characteristics

#### Thermoplastic Discharge

Item #	Model	HP	Stages	Volts	Wire	Shut Off (ft)	Weight (lbs)	Quick Disconnect Control Box (QD)	Capacitor Run Control Box (CRC)	Standard Capacitor Start Capacitor Run Control Box
558601	W16G07S8-22P	3/4	8	230	2	220 (67.1 m)	28	-	-	-
558602	W16G07S8-32P	3/4	8	230	3	220 (67.1 m)	27	558823	558824	-
558603	W16G10S10-22P	1	10	230	2	280 (85.3 m)	31	-	-	-
558604	W16G10S10-32P	1	10	230	3	280 (85.3 m)	30	558833	558834	-
558605	W16G15S13-22P	1-1/2	13	230	2	369 (112.5 m)	40	-	-	-
558606	W16G15S13-32P	1-1/2	13	230	3	369 (112.5 m)	39	-	-	558842

#### Stainless Steel Discharge


Item #	Model	HP	Stages	Volts	Wire	Shut Off (ft)	Weight (lbs)	Quick Disconnect Control Box (QD)	Capacitor Run Control Box (CRC)	Standard Capacitor Start Capacitor Run Control Box
558607	W16G07S8-22S	3/4	8	230	2	220 (67.1 m)	28	-	-	-
558608	W16G07S8-32S	3/4	8	230	3	220 (67.1 m)	27	558823	558824	-
558609	W16G10S10-22S	1	10	230	2	280 (85.3 m)	31	-	-	-
558610	W16G10S10-32S	1	10	230	3	280 (85.3 m)	20	558833	558834	-
558611	W16G15S13-22S	1-1/2	13	230	2	369 (112.5 m)	40	-	-	-
558612	W16G15S13-32S	1-1/2	13	230	3	369 (112.5 m)	39	-	-	558842



# 16 GPM

Thermoplastic and Stainless Steel

Performance Curve

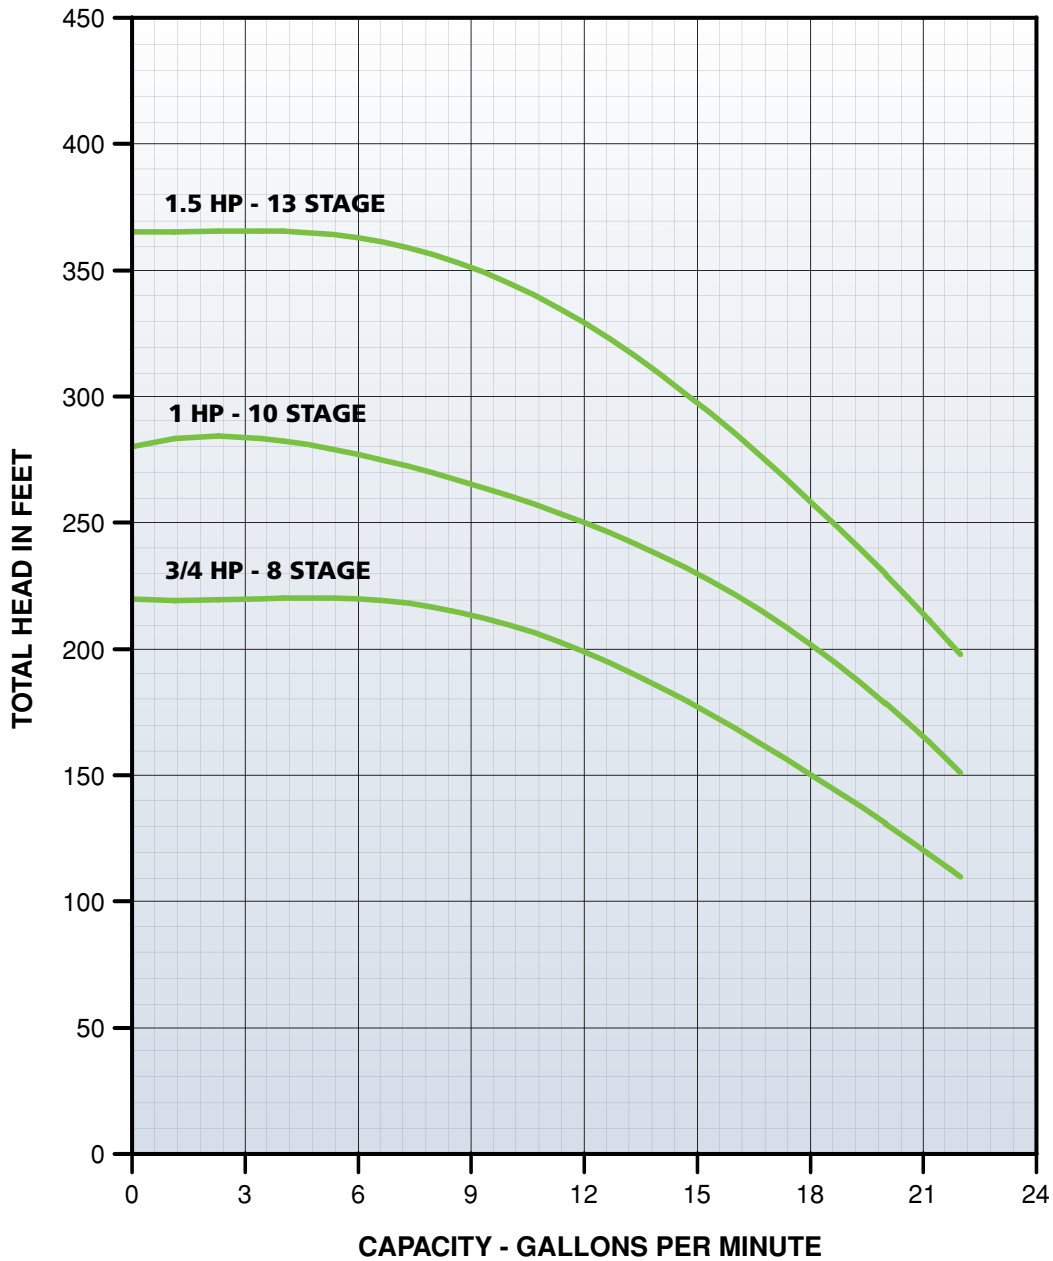

## 4" Submersible Well Pumps

# 16 GPM

## Thermoplastic and Stainless Steel

### Capacities in U.S. Gallons per Minute – 16 GPM

Model	HP	Stg.	PSI	Depth to Pumping Water Level in Feet																						Max. Press.				
				20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	600	650	PSI	Feet						
W16G07S8	3/4	8	0									19	17	15	12											95	220			
			10							19	17	14	11																	
			20				20	18	16	14	10																			
			30			20	18	16	13	10																				
			40		20	18	16	13	9																					
			50	20	17	15	13	7																						
			60	17	15	12	6																							
			70	14	11																									
			80	11																										
Shut Off PSI				87	78	69	61	52	43	35	26	18	9																	

Model	HP	Stg.	PSI	Depth to Pumping Water Level in Feet																						Max. Press.				
				20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	600	650	PSI	Feet						
W16G10S10	1	10	0											20	18	12										121	280			
			10										20	18	16	7														
			20									19	18	15	13															
			30								19	17	15	12	8															
			40				20	19	17	15	12	7																		
			50			20	19	17	14	11	6																			
			60		20	18	16	14	10	5																				
			70	20	18	16	13	10	4																					
			80	18	16	13	9																							
			90	15	12	8																								
			100	12	8																									
			110	7																										
Shut Off PSI				113	104	95	87	78	69	61	52	43	35	13																

Model	HP	Stg.	PSI	Depth to Pumping Water Level in Feet																						Max. Press.					
				20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	600	650	PSI	Feet							
W16G15S13	1-1/2	13	0													19	15	9								160	369				
			10														17	13													
			20													20	19	15	10												
			30													20	19	17	13												
			40													20	18	17	15	10											
			50									20	18	17	15	13	5														
			60								19	18	16	15	13	11															
			70						19	18	16	15	13	11	6																
			80		20	19	17	16	14	13	10	5																			
			90	20	19	17	16	14	12	9	4																				
			100	19	17	15	14	12	9																						
			110	17	15	14	12	8																							
			120	15	13	11	7																								
			130	13	11	7																									
			140	10	6																										
			150	5																											
			160																												
Shut Off PSI				151	143	134	125	117	108	99	91	82	73	52	30	8															

## 4" Submersible Well Pumps

# 22 GPM

## Thermoplastic and Stainless Steel

### Applications

- For both new installs and replacement applications where water must be transferred under pressure from wells, cisterns, ponds, lakes, and streams

### Features

- 3/4, 1, and 1-1/2 hp single-phase motors
- Removable suction screen prevents debris from clogging impellers and provides full-flow performance
- Hex rubber bearing has multi-flow channels to keep small particles away from bearing surface
- Built-in Flomatic™ check valve assembly provides positive seal, preventing system drain-back
- Stainless steel bearing sleeve
- Acetal disk facilitates close tolerances for increased performance
- Stainless steel up-thrust washer prevents excessive wear in severe applications
- Two-year limited warranty

### Series Specifications

**Capacity:** 22 gpm (83 lpm)

**Discharge:** 1-1/4" FNPT (31.7 mm)

**Electrical:** 230 V



### Model Characteristics

#### Thermoplastic Discharge

Item #	Model	HP	Stages	Volts	Wire	Shut Off (ft)	Weight (lbs)	Quick Disconnect Control Box (QD)	Capacitor Run Control Box (CRC)	Standard Capacitor Start Capacitor Run Control Box
558613	W22G07S5-22P	3/4	5	230	2	153 (46.6 m)	27	–	–	–
558614	W22G07S5-32P	3/4	5	230	3	153 (46.6 m)	27	558823	558824	–
558573	W22G10S7-22P	1	7	230	2	212 (64.6 m)	30	–	–	–
558574	W22G10S7-32P	1	7	230	3	212 (64.6 m)	33	558833	558834	–
558538	W22G15S9-22P	1-1/2	9	230	2	280 (85.3 m)	40	–	–	–
558539	W22G15S9-32P	1-1/2	9	230	3	280 (85.3 m)	39	–	–	558542


#### Stainless Steel Discharge

Item #	Model	HP	Stages	Volts	Wire	Shut Off (ft)	Weight (lbs)	Quick Disconnect Control Box (QD)	Capacitor Run Control Box (CRC)	Standard Capacitor Start Capacitor Run Control Box
558615	W22G07S5-22S	3/4	5	230	2	153 (46.6 m)	27	–	–	–
558616	W22G07S5-32S	3/4	5	230	3	153 (46.6 m)	27	558823	558824	–
558597	W22G10S7-22S	1	7	230	2	212 (64.6 m)	30	–	–	–
558598	W22G10S7-32S	1	7	230	3	212 (64.6 m)	33	558833	558834	–
558548	W22G15S9-22S	1-1/2	9	230	2	280 (85.3 m)	40	–	–	–
558549	W22G15S9-32S	1-1/2	9	230	3	280 (85.3 m)	39	–	–	558842

# 22 GPM

Thermoplastic and Stainless Steel

Performance Curve

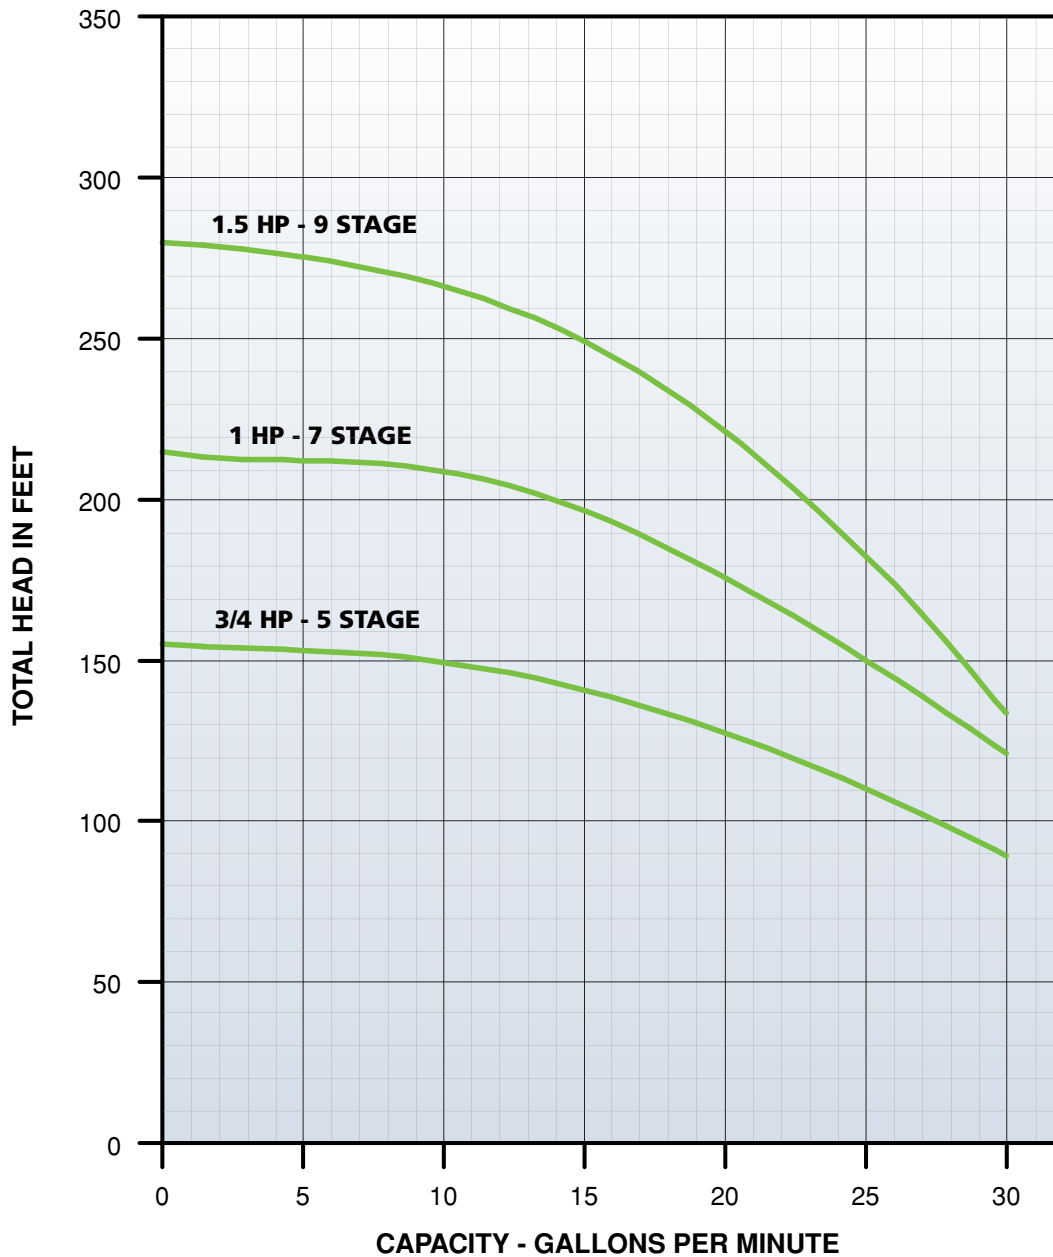

## 4" Submersible Well Pumps

# 22 GPM

## Thermoplastic and Stainless Steel

### Capacities in U.S. Gallons per Minute – 22 GPM

Model	HP	Stg.	PSI	Depth to Pumping Water Level in Feet																	Max. Press.											
				20	40	60	80	100	120	140	160	180	200	220	240	260	280	300	340	380	420	460	500	900	PSI	Feet						
W22G07S5	3/4	5	0					27	22	15																		66	153			
			10				27	21	14																							
			20			26	20	12																								
			30		25	19	10																									
			40	25	18	7																										
			50	17																												
Shut Off PSI				58	49	40	32	23	14	6																						

Model	HP	Stg.	PSI	Depth to Pumping Water Level in Feet																	Max. Press.											
				20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	600	650	700	750	PSI	Feet						
W22G10S7	1	7	0							27	23	19	14															92	212			
			10						26	23	18	13																				
			20					26	22	18	11																					
			30				25	21	17	9																						
			40			25	20	16																								
			50	27	24	20	16																									
			60	24	19	15																										
			70	19	13																											
			80	12																												
Shut Off PSI				83	75	66	57	49	40	31	23	14	5																			

Model	HP	Stg.	PSI	Depth to Pumping Water Level in Feet																	Max. Press.											
				20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	600	650	700	750	PSI	Feet						
W22G1S9	1-1/2	9	0								27	25	23	15														121	280			
			10							27	25	23	20	7																		
			20						27	25	22	19	16																			
			30					26	24	22	19	15	9																			
			40				26	24	21	18	14	7																				
			50			26	24	21	18	14																						
			60	27	26	23	20	17	13																							
			70	25	23	20	17	12																								
			80	22	19	16	11																									
			90	19	15	9																										
			100	15	8																											
			110	6																												
Shut Off PSI				139	130	121	113	104	95	87	78	69	61	39	17																	

## 4" Submersible Well Pumps

# 5 - 22 GPM

## Thermoplastic and Stainless Steel Pump Ends

### Capacities in U.S. Gallons per Minute – 22 GPM

Thermoplastic Pump Ends						
Item #	Model	HP	Stages	GPM	Weight (lbs)	Height (in)
558400	W5G05S13-PEP	1/2	13	5	8	17.54
558401	W5G07S18-PEP	3/4	18	5	10	21.51
558402	W5G10S21-PEP	1	21	5	11	22.27
558403	W8G05S9-PEP	1/2	9	8	4	14.30
558404	W8G07S12-PEP	3/4	12	8	7	16.65
558405	W8G10S15-PEP	1	15	8	8	19.00
558406	W12G05S7-PEP	1/2	7	12	6	12.73
558407	W12G07S9-PEP	3/4	9	12	7	14.30
558408	W12G10S12-PEP	1	12	12	8	16.65
558409	W12G15S17-PEP	1-1/2	17	12	12	20.57
558410	W16G07S8-PEP	3/4	8	16	7	16.12
558411	W16G10S10-PEP	1	10	16	7	18.34
558412	W16G15S14-PEP	1-1/2	14	16	10	21.66
558413	W22G07S5-PEP	3/4	5	22	6	12.79
558414	W22G10S7-PEP	1	7	22	7	15.01
558415	W22G15S9-PEP	1-1/2	9	22	8	17.23

Stainless Steel Pump Ends						
Item #	Model	HP	Stages	GPM	Weight (lbs)	Height (in)
558450	W5G05S13-PES	1/2	13	5	9	17.95
558451	W5G07S18-PES	3/4	18	5	11	21.91
558452	W5G10S21-PES	1	21	5	12	24.29
558453	W8G05S9-PES	1/2	9	8	5	14.62
558454	W8G07S12-PES	3/4	12	8	8	16.97
558455	W8G10S15-PES	1	15	8	9	19.32
558456	W12G05S7-PES	1/2	7	12	7	13.05
558457	W12G07S9-PES	3/4	9	12	8	14.62
558458	W12G10S12-PES	1	12	12	9	16.97
558459	W12G15S17-PES	1-1/2	17	12	13	20.89
558460	W16G07S8-PES	3/4	8	16	8	16.44
558461	W16G10S10-PES	1	10	16	8	18.66
558462	W16G15S14-PES	1-1/2	14	16	11	21.98
558466	W16G2S18-PES	2	18	16	13	27.53
558467	W16G3S24-PES	3	24	16	16	30.76
558463	W22G07S5-PES	3/4	5	22	7	13.11
558464	W22G10S7-PES	1	7	22	8	15.33
558465	W22G15S9-PES	1-1/2	9	22	9	17.55
558468	W22G2S11-PES	2	11	22	10	19.77
558469	W22G3S15-PES	3	15	22	12	24.20
558470	W22G5S25-PES	5	25	22	19	37.38

Maximum diameter with cable guard is 3.90".

# Submersible Motor Control Boxes

## QD, Standard & Deluxe

### Applications

- Quick Disconnect (QD) & Capacitor Run Control (CRC) - These control boxes are designed for use with Franklin 3-wire single-phase submersible motors through 1 hp.

### Features

- Suitable for outdoor mounting
- Capacitor Start/Capacitor Run design (except QD boxes)
- External access to overload resets
- Multiple-size knockouts
- User-friendly connection diagrams
- Easy access to grounding lugs



### Model Characteristics

Item #	Model	HP	Volts	Wire	Weight (lbs)
2801044915	CB-1/2-115-60-Q	1/2	115	3	3
2801054915	CB-1/2-230-60-Q	1/2	230	3	3
2801074915	CB-3/4-230-60-Q	3/4	230	3	3
2801084915	CB-1-230-60-Q	1	230	3	3
2824055015	CB-1/2-230-60-CRC	1/2	230	3	5
2824075015	CB-3/4-230-60-CRC	3/4	230	3	5
2824085015	CB-1-230-60-CRC	1	230	3	5
2823008110	CB-1.5-230-60-S	1-1/2	230	3	7
28923018110	CB-2-230-60-S	2	230	3	7
2823018310	CB-2-230-60-D	2	230	3	7

# Specification Charts

Loss of head in feet, due to friction per 100 feet of pipe. (Based on C=100 for Steel, C=130 for Copper and C=140 for Plastic.)

Nom: Pipe Size	1/2"			3/4"			1"			1-1/4"			1-1/2"			2"			2-1/2"			3"	4"	5"	6"	8"	Nom: Pipe Size	
	Material	Steel	Copper	Plastic	Steel	Copper	Plastic	Steel	Copper	Plastic	Steel	Copper	Plastic	Steel	Copper	Plastic	Steel	Copper	Plastic	Steel	Copper	Plastic	Steel	6.065	8.071	Material		
I.D.	.622	.625	.622	.824	.822	.824	1.049	1.062	1.049	1.380	1.368	1.380	1.610	1.600	1.610	2.067	2.062	2.067	2.469	2.500	2.469	3.068	4.026	5.047	6.065	8.071	I.D.	
U.S. GPM	.58	.35	.31																								U.S. GPM	
0.5																											0.5	
1.0																												1.0
1.5																												1.5
2.0																												2.0
2.5																												2.5
3.0																												3.0
3.5																												3.5
4.0																												4.0
4.5																												4.5
5.0																												5.0
5.5																												5.5
6.0																												6.0
6.5																												6.5
7.0																												7.0
7.5																												7.5
8.0																												8.0
8.5																												8.5
9.0																												9.0
9.5																												9.5
10																												10
11																												11
12																												12
13																												13
14																												14
16																												16
18																												18
20																												20
25																												25
30																												30
35																												35
40																												40
45																												45
50																												50
55																												55
60																												60
65																												65
70																												70
75																												75
80																												80
85																												85
90																												90
95																												95
100																												100
110																												110
120																												120
130																												130
140																												140
150																												150
160																												160
170																												170
180																												180
190																												190
200																												200
220																												220
240																												240
260																												260
280																												280
300																												300
320																												320
340																												340
360																												360
380																												380
400																												400
450																												450
500																												500
550																												550
600																												600
650																												650
700																												700
750																												750
800																												800
850																												850
900																												900
950																												950
1000																												1000
1100																												1100
1200																												1200
1300																												1300
1400																												1400
1500																												1500
1600																												1600
1800																												1800
2000																												2000
2200																												2200
2400																												2400

Note: **Bold items** are recommended for normal operation.



**Air volume control** – Designed to maintain the air charge in a standard water storage tank. Pre-charged tanks do not require an air volume control.

**Atmospheric pressure** – A force exerted upon the earth's surface by the weight of air extending to a height of 25 miles above the earth. At sea level, 14.7 pounds per square inch (psi).

**Centrifugal force** – The force created by a spinning or rotating impeller resulting in the movement of water outward from the center point. A pump uses an impeller to create centrifugal force.

**Check valve** – Allows water to move in only one direction which prevents water from returning to its source.

**Convertible jet pump** – For deep wells where pumping water levels are as far as 90 feet below the pump. Also easily converted for shallow wells where pumping water levels are no more than 25 feet below the pump. Jet packages must be purchased separately.

**Cut-in pressure setting** – The point at which the pressure switch turns the pump on.

**Deep well** – Well with a depth to water greater than 25 feet.

**Depth to water** – The vertical measurement from pump level down to water level of water source. Pump height above water.

**Discharge pressure** – The amount of force, or pressure of the water being discharged from the pump.

**Dual voltage motor** – Pump motor that can be operated on 115 or 230 Volts.

**Foot valve** – Installs on the end of pump suction pipe to prevent water from draining back to source. Includes strainer to minimize suction of debris into pump.

**GPH** – Gallons per hour.

**GPM** – Gallons per minute.

**HP** – Horsepower (power of motor).

**Jet pump** – A centrifugal pump which requires a jet to help build additional water pressure.

**Multi-stage jet pump** – For use on deep wells only, with pumping water levels as far as 210 feet below the pump.

**PSI** – Pounds per square inch. A volumetric pressure measure.

**Pre-charged tank** – A water storage tank pre-charged with air at the factory featuring a rubber diaphragm to separate water from air which prevents waterlogging. This tank design provides greater drawdown than standard tanks. Pre-charged tanks do not require an air volume control.

**Pressure** – A force usually expressed in pounds per square inch.

**Pressure switch** – The switch that automatically turns the pump on and off at specified pressures 30/50 psi and 40/60 psi. **IMPORTANT:** Always replace an old switch with a new switch that has the same pressure settings.

- **30/50 pressure operation** – Pressure switch turns pump on at 30 psi and off at 50 psi.

- **40/60 pressure operation** – Pressure switch turns pump on at 40 psi and off at 60 psi.

**Priming the pump** – The initial filling of a jet or centrifugal pump with water so that the air can be removed.

**Pump capacity** – The amount of water a pump is capable of moving at a given pressure.

**Safety relief valve** – Required for all submersible pump and pressure boosting installations to prevent over-pressurization of water storage tank and system piping that could develop from pressure switch malfunction.

**Shallow well** – Well with a depth of water of 25 feet or less.

**Shallow well pump** – For use on wells where pumping water levels are no more than 25 feet below the pump. Features a built-in jet.

**Sizing** – Properly matching product to application for best performance.

**Standard tank** – A pressurized water storage tank where air comes in contact with water. Requires air volume control for proper operation.

**Submersible pump control box** – Installs above ground. Contains electrical starting components for three-wire submersible deep well pumps. Two-wire submersible deep well pumps do not use a control box.

**Submersible deep well pump** – For use on wells where pump water levels are up to 400 feet below point of use. Pump is submerged under water in the well.

**Tank drawdown** – The amount of usable water available from a water storage tank between pump stops and starts.

**Waterlogging** – The absorption of air into water stored in a water storage tank which greatly reduces the amount of usable water drawdown available from the tank.

**Water storage tank** – Stores air and water under pressure to provide for automatic pump operation and a source of water when pump is not running.





## About Our Company.

In 2006, Franklin Electric acquired Little Giant Pump Company to solidify our position as a leading global supplier of water pumping systems for residential and commercial markets.

Little Giant® products – sump, sewage, effluent, utility, condensate removal, and submersible industrial pumps – complement and broaden Franklin Electric's overall water systems offering.

Little Giant Pump Company, now Franklin Electric, offers the industry a well-respected brand of products – Little Giant. Founded on quality, availability, service, innovation, and value, Franklin Electric continues to bring the Little Giant brand name advantage.

Franklin Electric Company is a global leader in the production and marketing of systems and components for the movement of water and automotive fuels. Recognized as a technical leader in its specialties, Franklin serves customers around the world in residential, commercial, agricultural, industrial, municipal, and fueling applications.

Long recognized as the world's largest manufacturer of submersible electric motors, Franklin Electric has been able to leverage its expertise in motor applications to grow and serve several different markets. The principal application for Franklin products is water well pumping systems, where the company offers pumps, motors, drives, and controls. In addition, Franklin Electric produces a vast array of products for fueling systems and the water transfer market.

With 3,500 employees worldwide, Franklin Electric is a global manufacturer with over 25 manufacturing and distribution facilities located in the United States, Germany, Czech Republic, Italy, Mexico, Canada, Australia, Brazil, South Africa, China, and Japan.

**Franklin Electric**  
P.O. Box 12010  
Oklahoma City, OK 73157-2010  
PH: 1-800-701-7894  
FX: 1-800-678-7867  
[www.LittleGiantPump.com](http://www.LittleGiantPump.com)



**Franklin Electric**

Form 995468 06/12