SERVICE PARTS LIST

BULLETIN NO.
54-49-8403

SPECIFY CATALOG NO. AND SERIAL NO. WHEN ORDERING PARTS

PACKOUT™ Totes & Bags

CATALOG NO.	SERIAL NO.

REVISED BULLETIN	DATE
	May 2023
WIRING INSTRUCTION	

EXAMPLE:
Component Parts (Small #) Are Included When Ordering The Assembly (Large #).

`00` `0`

SPECIAL NOTE: There are two locker designs for the 15" model. An early version of the 48-22-8321 had a different locker system. The design used in the 20" model was incorporated in later production of the 15" model.
See page two.

48-22-8321   15" PACKOUT™ (Medium) Tool Bag*

Locker located on side

48-22-8322   20" PACKOUT™ (Large) Tool Bag*

Locker located in front

*48-22-8321   15" PACKOUT™ (Medium) Tool Bag
*48-22-8322   20" PACKOUT™ (Large) Tool Bag

FIG.	PART NO.	DESCRIPTION OF PART	NO. REQ.
1	45-56-8300	Shoulder Strap (For both tote models)	(1)
2	44-20-8300	Locker Kit (For early versions of 48-22-8321) See page two.	(1)
3	44-20-0305	Locker (For 48-22-8322 and later versions of 48-22-8321) See page two.	(1)

SEE PAGE 2 FOR INSTRUCTIONS ON REMOVING SELECTION AND INSTALLING BOTH LOCKER SYSTEMS

48-22-8310   10" PACKOUT™(Small) Storage Tote
48-22-8315   15" PACKOUT™ (Medium) Storage Tote
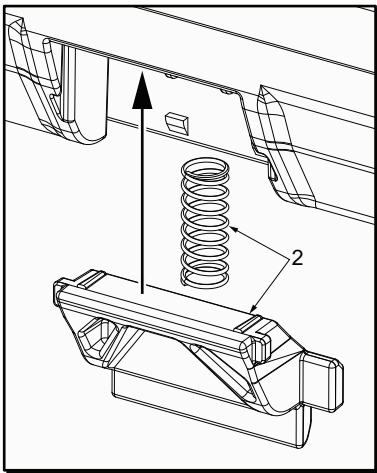**48-22-8320   20" PACKOUT™ (Large) Storage Tote**

FIG.	PART NO.	DESCRIPTION OF PART	NO. REQ.
1	45-56-8300	Shoulder Strap (For all three tote models)	(1)
2	44-20-8300	Locker Kit (For all three tote models)	(1)
	or		
3	44-20-0305	Locker Kit (For all three tote models)	(1)

SEE DIAGRAMS BELOW TO DETERMINE LOCKER SERVICE PART NEEDED.

1

No. 44-20-8300
Locker Kit
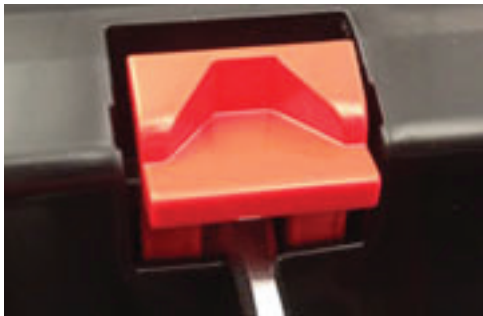For early production PACKOUT™
Storage Totes

To remove a damaged locker system, flip tote upside down and approach tote from the bottom of base. Insert a large flat blade screwdriver in middle of locking carriage as shown. Lightly pry carriage upward out of base opening. Remove and discard old locking carriage and spring.
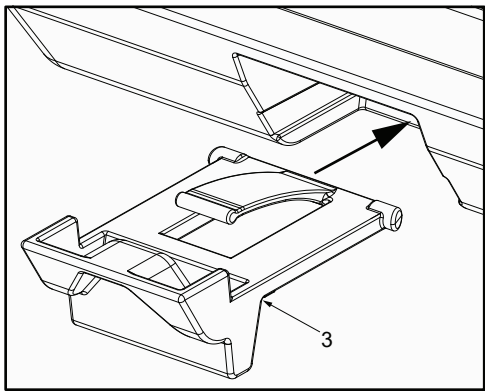
2

To install a Locker Kit (2), align spring as shown and guide the tabs of locking carriage in channels of tote base. Push locking carriage upward to snap into place.

To remove a damaged locker system, flip tote over on the side and approach tote from the bottom of base. Insert a large flat blade screwdriver in middle of locking carriage as shown. Lightly pry carriage upward out of base opening. Remove and discard old locking carriage.

No. 44-20-0305
Locker
For later production PACKOUT™
Storage Totes

3

To install a new Locker (3), guide the tabs of locking carriage in channels of tote base. Push locking carriage forward to snap into place.

48-22-8300   PACKOUT™ Tech Bag

48-22-8301   PACKOUT™ Jobsite Backpack

48-22-8302   PACKOUT™ Jobsite Cooler

FIG.	PART NO.	DESCRIPTION OF PART	NO. REQ.
1	45-56-8300	Shoulder Strap (For Cooler & Tech Bag)	(1)
2	44-20-0305	Locker System	(1)

SEE PAGE 2 FOR INSTRUCTIONS ON REMOVING AND INSTALLING BOTH LOCKER SYSTEMS

48-22-8311 PACKOUT™ 10" Structured Tote

FIG.	PART NO.	DESCRIPTION OF PART	NO. REQ.
1	14-46-8316	Shoulder Strap	(1)
2	14-46-8317	10" Structured Tote Accessory Strap	(2)

48-22-8316 PACKOUT™ 15" Structured Tool Bag

FIG.	PART NO.	DESCRIPTION OF PART	NO. REQ.
1	14-46-8316	Shoulder Strap	(1)
2	14-46-8318	15" Structured Tool Bag Accessory Strap	(2)