


INSTRUCTION SHEET

SNE SERIES

FULL DOOR OPTION

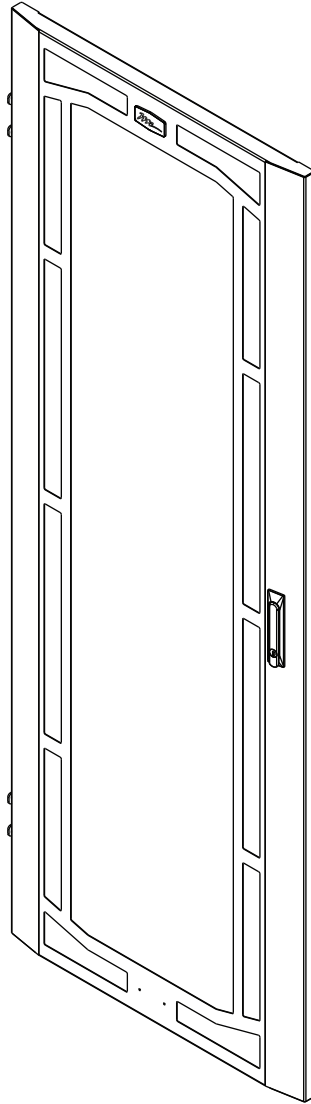

THANK YOU

Thank you for purchasing an SNE Series Full Door option. Please read these instructions thoroughly before installing or assembling this product. For more information, refer to the SNE Series Enclosure instruction sheet (I-00641).

PRODUCT FEATURES

- SNE Series locking full door available in vented plexiglass, plexiglass, vented, and solid options.
- Door may be installed to hinge left or right.
- Accepts industry-standard (25mm x 150mm) handle.


Middle Atlantic Products

IMPORTANT SAFETY INSTRUCTIONS

- Read these instructions.
- Heed all warnings.
- Clean only with dry cloth.
- Keep these instructions.
- Follow all instructions.
- Only use attachments/accessories specified by the manufacturer.



DANGER HAZARDOUS VOLTAGE: The lightning flash with the arrowhead symbol, within an equilateral triangle is intended to alert the user to the presence of uninsulated dangerous voltage within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



WARNING: A warning alerts you to a situation that could result in serious personal injury or death.



CAUTION: A caution alerts you to a situation that may result in minor personal injury or damage to the product and/or property.

NOTE: A note is used to highlight procedures pertaining to the installation, operation, or maintenance of the product.



WARNING: Failure to read, understand and follow the following information can result in serious personal injury, damage to the equipment or voiding of the warranty.



CAUTION: All installation and assembly steps must be performed by qualified personnel.



CAUTION: Ensure that the floor has a structural load capacity that will support the weight of the cabinet fully loaded with equipment.



CAUTION: The following parts are not effectively bonded to the protective earth terminal: Rack rails, lace bars, Lever Lock™, shelves, baffle, blanking panels, fans, and cable management. If any part needs to be bonded to the protective earth terminal it shall be done in accordance with Article 250 of the National Electrical Code.



CAUTION: To reduce the risk of personal injury and conform to the UL listing, the system must be grounded and bonded in accordance with Article 250 of the National Electrical Code.



CAUTION: Power cord, for fans or other accessories, need to be secured to ensure that they are routed away from pinch points and moving parts.



CAUTION: To reduce the risk of personal injury, these mounting instructions must be followed and proper weight capacities must be observed.



CAUTION: Watch hands and fingers around pinch points.



CAUTION: Individual components mounted inside of the wall mount rack must have their own fire enclosure.

INSTRUCTIONS IMPORTANTES SUR LA SÉCURITÉ

- Lire ces instructions.
- Respectez tous les avertissements.
- Nettoyer uniquement avec un chiffon sec.
- Conservez ces instructions.
- Suivez toutes les instructions.
- N'utilisez que des accessoires spécifiés par le fabricant.



DANGER TENSION DANGEREUSE: Le symbole de la pointe de flèche, dans un triangle équilatéral, est destiné à alerter l'utilisateur sur la présence de tension dangereuse non isolée dans l'enceinte du produit qui peut être d'une ampleur suffisante pour constituer un risque d'électrocution.



AVERTISSEMENT: Un avertissement vous avertit d'une situation pouvant entraîner des blessures graves ou la mort.



ATTENTION: Une attention vous avertit d'une situation pouvant entraîner des blessures mineures ou des dommages au produit et/ou à la

REMARQUE: Une remarque est utilisée pour mettre en évidence les procédures relatives à l'installation, au fonctionnement ou à l'entretien du produit.



AVERTISSEMENT: Ne pas lire, comprendre et suivre les informations suivantes peut entraîner des blessures graves, des dommages à l'équipement ou de la nullité de la garantie.



ATTENTION: Toutes installation et de montage étapes doivent être effectuées par du personnel qualifié.



ATTENTION: Veiller à ce que le sol a une capacité de charge structurelle qui supporter le poids de le cabinet entièrement chargé avec l'équipement.



ATTENTION: Les pièces suivantes ne sont pas correctement liés à la borne de terre de protection: rails de rack, des bars de dentelle, Lever Lock™, des étagères, des chicanes, des panneaux d'obturation, ventilateurs, et la gestion des câbles. Si une partie doit être lié à la borne de terre de protection, il doit être fait conformément à l'article 250 du Code national de l'électricité.



ATTENTION: Pour réduire le risque de blessure et se conformer à la liste UL, le système doit être mis à la terre et collé conformément à l'article 250 du Code national de l'électricité.



ATTENTION: Le cordon d'alimentation, pour les fans ou autres accessoires, doivent être fixé à veiller à ce que ils sont acheminés loin des points de pincement et des pièces mobiles.



ATTENTION: Pour réduire le risque de blessures, ces instructions de montage doivent être respectées et les capacités de poids appropriées doivent être respectées.



ATTENTION: Observez les mains et les doigts autour des points de pincement.




ATTENTION: Les composants individuels montés à l'intérieur de montage mural doivent avoir leur propre armoire à incendie.

SUPPLIED COMPONENTS AND HARDWARE




(4x) Hinge Screw

A



(2x) Male Hinge


B

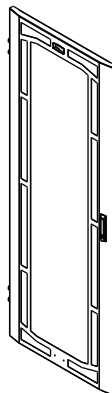

Full Door

(Pre-Installed Female Hinges, Logo/Badge, and Handle)

C



Bonding Wire

D



(2x) Key
(1333)

E

REQUIRED TOOLS

No. 2 Phillips Screwdriver



WARNING: Use tools with caution and follow all necessary safety protocols.

AVERTISSEMENT: Utiliser des outils avec prudence et suivre tous les protocoles de sécurité nécessaires.

INSTALLING THE FULL DOOR

NOTE:

- Decide whether you want to install your full door with the hinges on the left or right side of the rack (facing) as shown. **(FIGURE A)**
- This topic shows how to install the full door with the hinges on the left of the rack and the door handle on the right. To reverse the installation, see “Reversing the Full Door” on page 6.

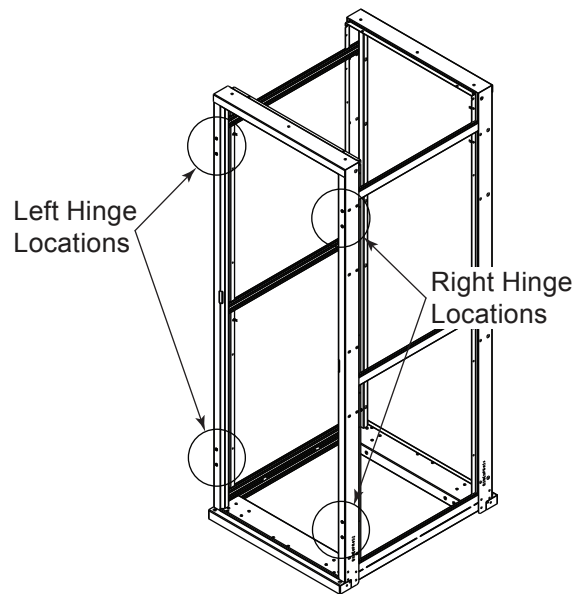


FIGURE A

1. Use a No. 2 Phillips screwdriver and (4x) hinge screws (A) to attach (2x) male hinges (B, 2x screws per hinge) to your desired side of the rack. **(FIGURE B)**


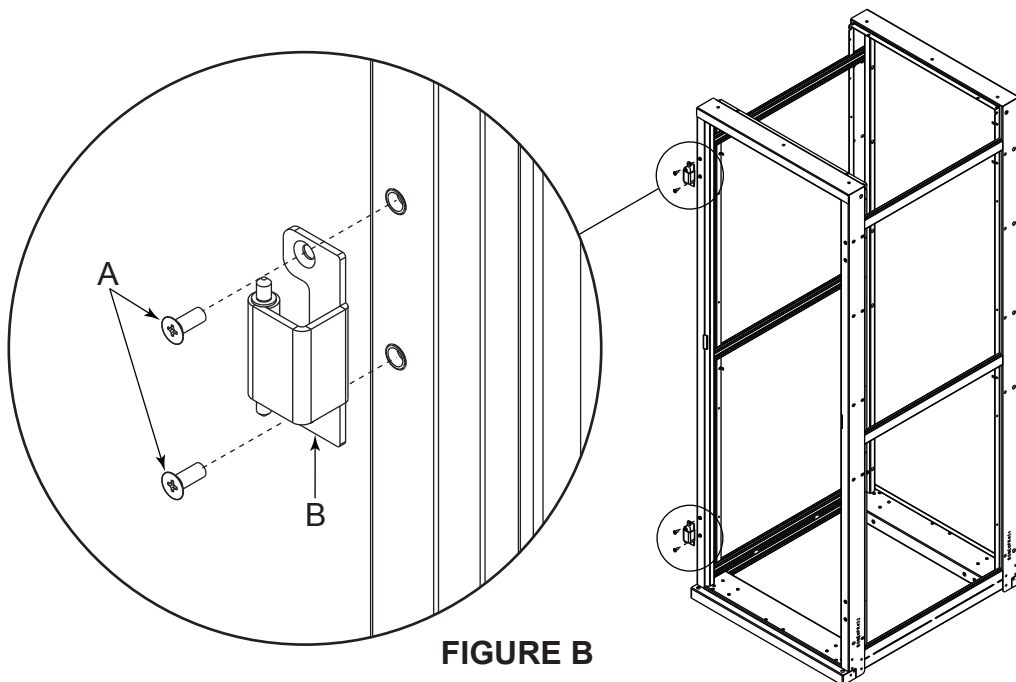


FIGURE B

INSTALLING THE FULL DOOR (CONTINUED)

2. Lift the full door (C) with its inside facing you and hook the female hinges (on the full door) on to the male hinge pins (on the rack). **(FIGURE C)**

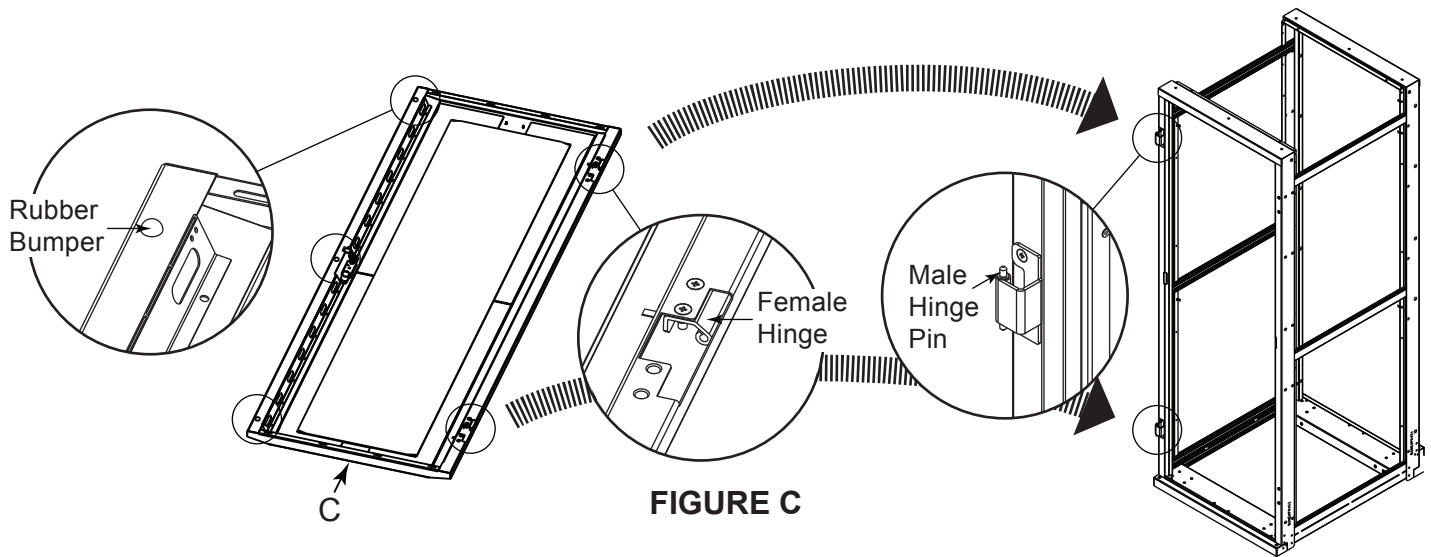


NOTE:

- Female hinges are preinstalled on the full door as shown. **(FIGURE C)**
- Rubber bumpers are presintalled on the full door (on the opposite side of the preinstalled female

BONDING THE FULL DOOR

1. Attach bonding wire (D) to the rack bonding wire connector. **(FIGURE D)**
2. Attach other end of bonding wire to the full door bonding wire connector.

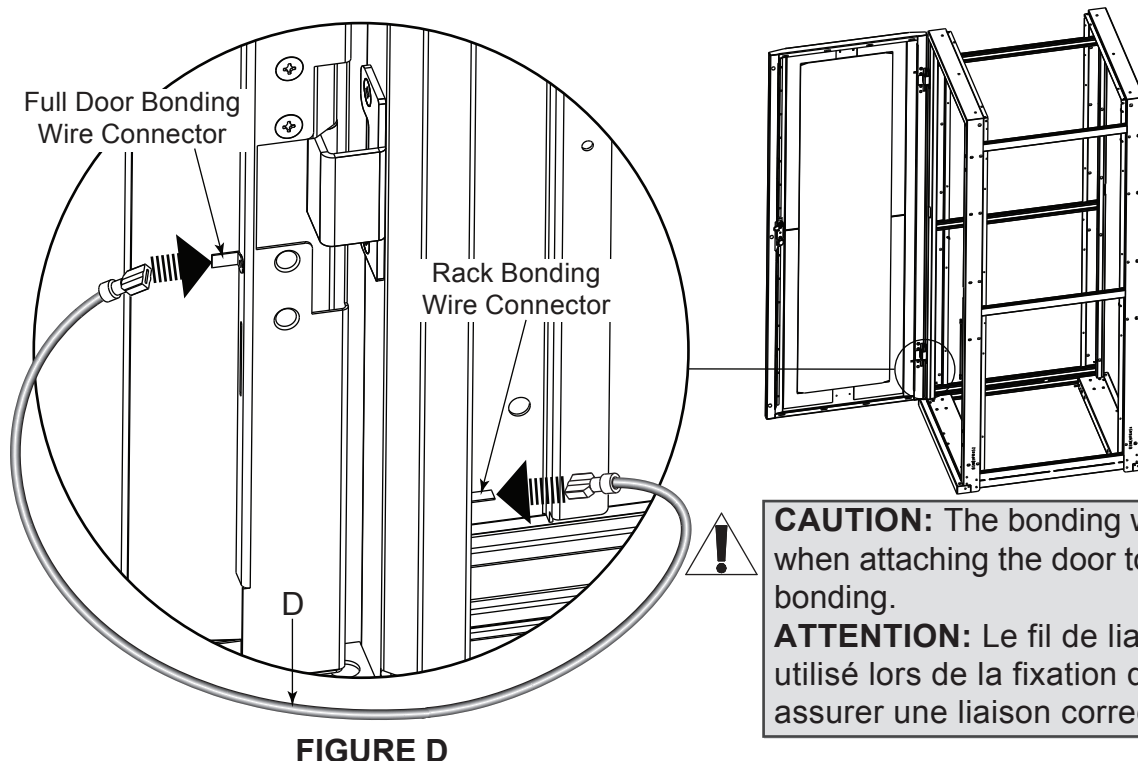

CAUTION: The bonding wire must be used when attaching the door to ensure proper bonding.

ATTENTION: Le fil de liaison doit être utilisé lors de la fixation de la porte pour assurer une liaison correcte.

REVERSING THE FULL DOOR (IF APPLICABLE)

1. Attach the male hinges to the right hinge locations on the rack as similarly explained in "Installing the Full Door" on page 4.
2. Use screwdriver to remove the (2x) female hinge screws from both preinstalled female hinges on the full door (C) as shown. (**FIGURE E**)

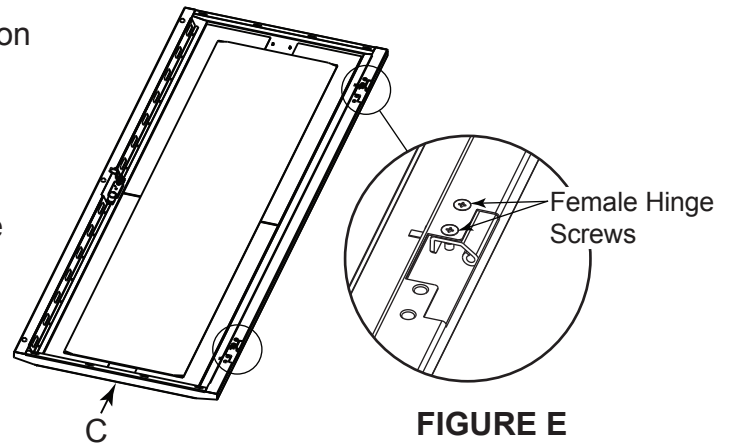


FIGURE E

3. Slide the female hinges into their alternate positions on the full door and reattach the female hinge screws as shown. (**FIGURE F**)

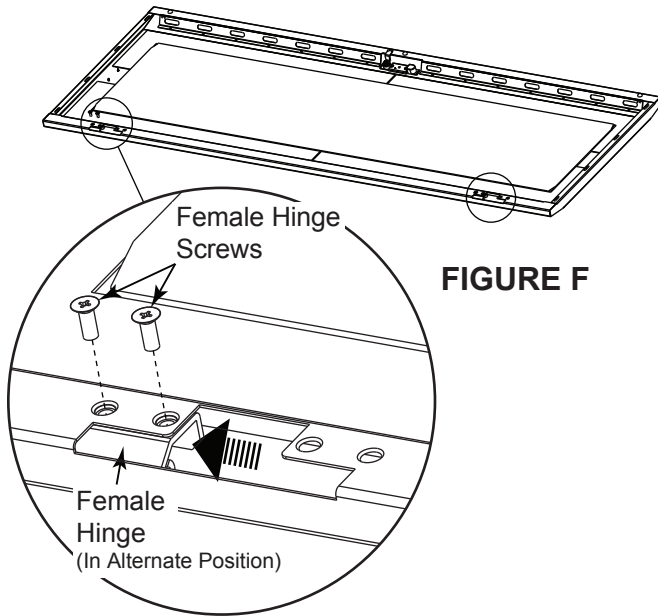


FIGURE F

4. Remove the cam screw and the (2x) handle screws from the handle mounting plate as shown. (**FIGURE G**)
5. Rotate and reassemble the handle to the full door. Rotate and reassemble the cam to the handle.
6. Carefully rotate the full door (C), lifting it with the inside facing you, and then hook the female hinges (on the full door) on to the male hinge pins (on the rack) as similarly explained in "Installing the Full Door" on page 5.
7. Carefully remove the Middle Atlantic Products logo/badge from the lower part of the full door and install it upright into the holes on the top of the full door.
8. Reattach the bonding wire (D) to the rack bonding wire connector and the full door bonding wire connector as similarly explained in "Bonding the Door" on page 5.

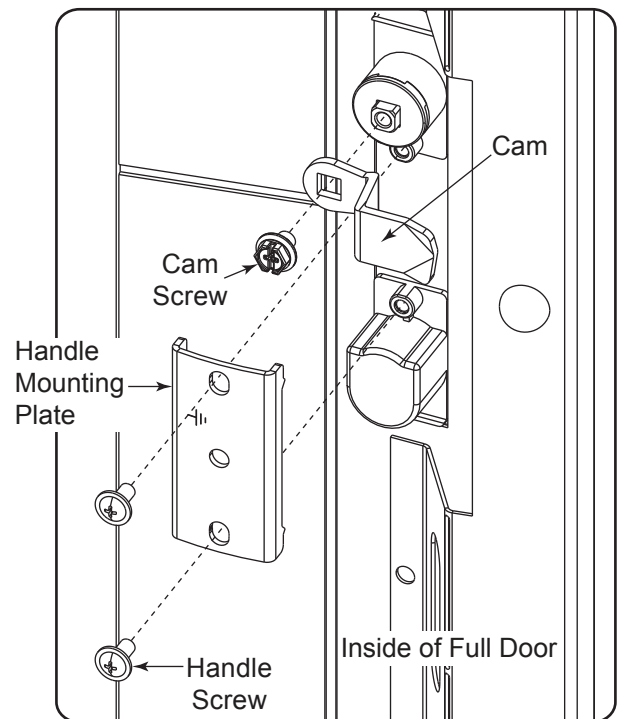


FIGURE G

REVERSING THE FULL DOOR (IF APPLICABLE, CONTINUED)

NOTE: A rack bonding wire connector and a full door bonding wire connector are provided in the opposite lower corners when reversing the door.



CAUTION: The bonding wire must be used when attaching the door to ensure proper bonding.

ATTENTION: Le fil de liaison doit être utilisé lors de la fixation de la porte pour assurer une liaison correcte.

WARRANTY

For warranty information, refer to <http://www.middleatlantic.com/company/about-us.aspx#warranty>

Corporate Headquarters

Corporate Voice: 973-839-1011 - Fax: 973-839-1976 / International Voice: +1 973-839-8821 -

Fax: +1 973-839-4982

www.middleatlantic.com - info@middleatlantic.com

Middle Atlantic Canada

Voice: 613-836-2501 - Fax: 613-836-2690 / ca.middleatlantic.com -

customerservicecanada@middleatlantic.ca

Factory Distribution

USA: NJ - CA - IL Canada: ON

At Middle Atlantic Products we are always listening. Your comments are welcome.

Middle Atlantic Products is an ISO 9001 and ISO 14001 Registered Company.



Middle Atlantic Products

what great systems are built on™

middleatlantic.com ■ 800.266.7225