

select

VERTICAL PDU WITH RACKLINK™

Value oriented, intelligent outlet offering that is as versatile as your system and universally controlled



FEATURES

- **15A**
- **10 (4 Controlled) and 16 (8 Controlled) Outlets**
- **Connect to the FREE RackLink Cloud!** Monitor and manage all deployed RackLink-enabled Select PDUs around the globe from a single, customizable dashboard.
- **Industry-leading network security and support of IT protocols for demanding end users**
 - SSH
 - HTTPS
 - Self-signed certificates
- **Save the RU.** Mount this PDU vertically in your rack and save space for other important equipment.
- **The control you need to maintain the uptime of your equipment.** After you go through the easy set-up of the RackLink™ user interface, you'll have individual IP outlet control.
- **Manage the start-up or shut down of your equipment.** RackLink™ enables remote sequencing with user selectable delays for an optimal start-up or shut down progression.
- **Protect your equipment.** Each PDU comes with basic surge to protect your devices from harmful power anomalies.
- **Fast and easy commissioning.** Using the RackLink™ Discovery app on iPhone or Android, quickly connect your RackLink™ enabled PDUs and monitor your system, anywhere, anytime.
- **Automate it and forget about it.** Improve your system reliability by automating actions such as multiple IP AutoPing and recovery.
- **Always be informed.** Receive automatic notifications of connection status.
- **Do you prefer to use a third party software?** Seamlessly interfaces with 3rd party AV control systems and cloud platforms for scheduling, control, reporting and even customization.



RLNK-1015V



RLNK-1615V

select

VERTICAL PDU WITH RACKLINK™

SPECIFICATIONS

Select Series Vertical Mount PDU with RackLink™ Series power management products shall be Middle Atlantic Products model # RLNK-_15V (refer to chart). Select Series Vertical Mount PDU with RackLink power products shall be __"H x 1.89"W x 1.625"D (refer to drawing). Select Series Vertical Mount PDU with RackLink shall have a 15 amp power capacity. Select Series Vertical Mount PDU with RackLink shall provide MOV surge and spike protection. Select Series Vertical Mount PDU with RackLink shall provide __ total outlets, __ of which shall be individually controllable (refer to chart). Select Series Vertical Mount PDU with RackLink shall provide sequencing. Select Series Vertical Mount PDU with RackLink shall include a 9' power cord. Select Series Vertical Mount PDU with RackLink shall monitor specific remote IP devices and services and shall automatically reboot an unresponsive network device and provide alerts via e-mail. Select Series Vertical Mount PDU with RackLink shall allow local export of log files in CSV format, and shall allow log files to be extracted to 3rd party databases via IP. Select Series Vertical Mount PDU with RackLink shall include an integrated web server for browser-based access and control. Select Series Vertical Mount PDU with RackLink shall utilize an open-architecture serial communications protocol that is cloud compliant without being cloud dependent, and provide an API for seamless integration into any IP based architecture. Select Series Vertical Mount PDU with RackLink shall be fully compliant with any control system or aggregator. Select Series Vertical PDUs with RackLink shall support HTTPS, SSH and Self-Signed Certificates. Select Series Vertical Mount PDU with RackLink shall be constructed of aluminum with a black anodized finish. Select Series Vertical Mount PDU with RackLink shall be manufactured by an ISO 9001 and ISO 14001 registered company. Select Series Vertical Mount PDU with RackLink Link shall be warrantied to be free from defects in materials and workmanship under normal use and conditions for a period of 3 years. Series Vertical Mount PDU with RackLink shall be listed to UL standard 62368-1 in US and to CAN/CSA C22.2 #62368-1 in Canada and FCC Part 15, Class B.



select

VERTICAL PDU WITH RACKLINK™


ELECTRICAL SPECIFICATIONS

		RLNK-1015V	RLNK-1615V
Summary	Form Factor	Vertical	
	Max Load	15A	
	Rated Load	12A	
	Surge Protection	Yes	
	Sequencing	Yes	
	# of Outlets	10 total / 4 controlled	16 total / 8 controlled
	Integrated Web Server	Yes	
AC Power	Connection Type	9ft. IEC (15A)	
	Line Voltage	Nominal: 120VAC / Minimum: 80VAC / Maximum: 140VAC	
	Maximum Peak Load	15A	
	Maximum Continuous Load	12A	
	No Load Power Dissipation	Less than 1W Note: Ethernet disconnected, all relays off	
Basic Surge Specification	Peak Impulse Current (8/20uS Waveform)	12,000A, one time, 9,000A, two times within 5 minutes Maximum peak impulse current pulse as defined between line and neutral Maximum multiple impulse current derated per spec	
	Protection Mode	Line to Neutral only: no ground contamination	
	Response Time	Less than 1 nanosecond	
	Surge energy Dissipation	120 Joules (10 / 100 micro seconds)	
	EMI / RF Supression	>20dB Calculated Line to Neutral - 100kHz to 1Mhz - based on nominal impedance	
Regulatory Approvals	Safety	cETLus Listed to UL 62368-1 and CSA C22.2 No. 62368-1	
	EMI / RF	FCC Part 15, Class B	
Event Driven / Responses	AutoPing No Response / Recovery	Email and / or Control Outlet	
General	Operating Temperature Range	32 - 104°F (0-40°C)	
	Humidity Range	0-95%, non-condensing	
	Communication	TCP/IP, HTTPS (Integrated web server)	
	Warranty	3 Years Limited Warranty	

select

VERTICAL PDU WITH RACKLINK™

BASIC DIMENSIONS

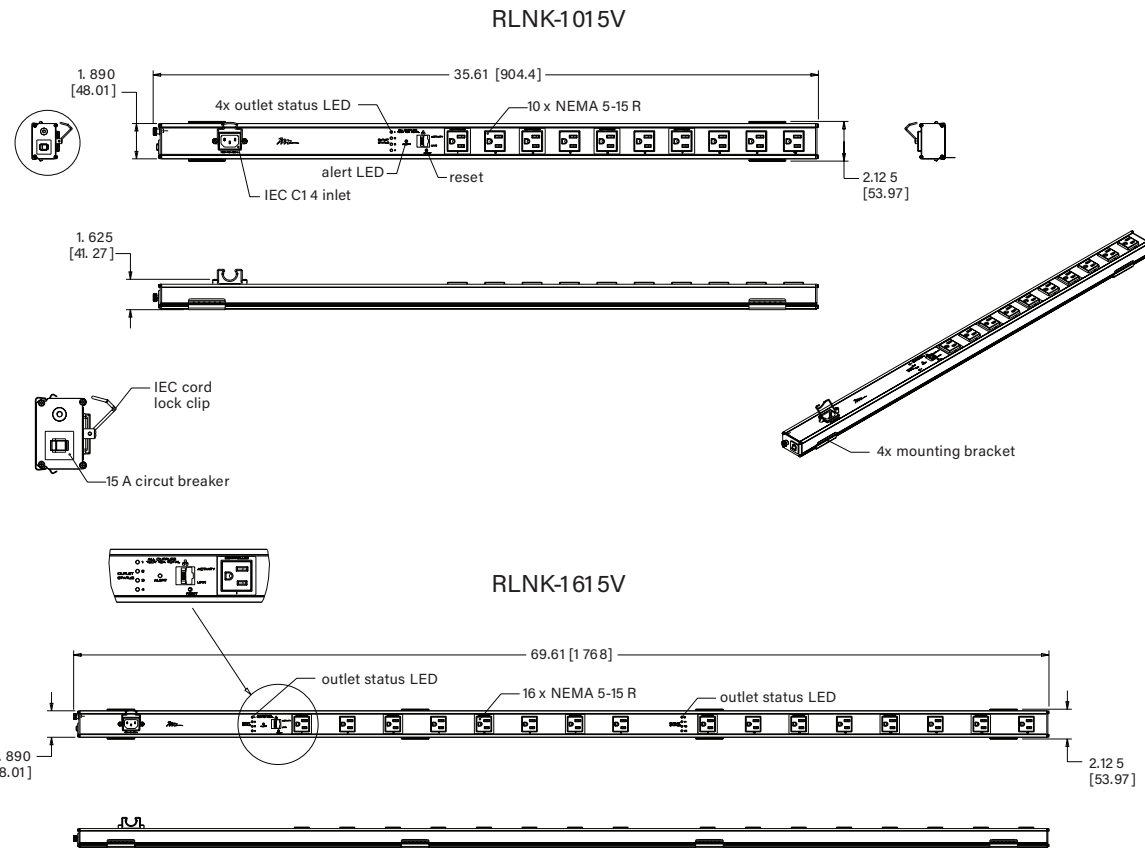

LEGRAND | AV COMMERCIAL BRANDS
C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

WHAT GREAT SYSTEMS ARE BUILT ON™ | legrandav.com

USA 800.266.7225 av.middleatlantic.support@legrand.com CANADA 888.766.9770 av.middleatlantic.support@legrand.com

©2025 Legrand AV Inc. 230735 96-01195 Rev E 5/25 Middle Atlantic is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.