

select

COMPACT PDU WITH RACKLINK™

Value oriented, intelligent outlet offering that is as versatile as your system and universally controlled

FEATURES

- **15 Amps**
- **2 Outlets**
- **Connect to the FREE RackLink Cloud!** Monitor and manage all deployed RackLink-enabled Select PDUs around the globe from a single, customizable dashboard.
- **Industry-leading network security and support of IT protocols ending end users**
 - SSH
 - HTTPS
 - Self-signed certificates
- **Oh Snap! It's Compact!** The compact design of this PDU is perfect for "behind-the-display" applications, especially digital signage.
- **The control you need to maintain the uptime of your equipment.** After you go through the easy set-up of the RackLink™ user interface, you'll have individual IP outlet control for 2 outlets.
- **Manage the start-up or shut down of your equipment.** RackLink™ enables remote sequencing with user selectable delays for an optimal start-up or shut down progression.
- **Protect your equipment.** Each PDU comes with basic surge to protect your devices from harmful power anomalies.
- **Fast and easy commissioning.** Using the RackLink™ Discovery app on iPhone or Android, quickly connect your RackLink™ enabled PDUs and monitor your system, anywhere, anytime.
- **Automate it and forget about it.** Improve your system reliability by automating actions such as multiple IP AutoPing and recovery.
- **Always be informed.** Receive automatic notifications of connection status.
- **Do you prefer to use a third party software?** Seamlessly interfaces with 3rd party AV control systems and cloud platforms for scheduling, control, reporting and even customization.



RLNK-215

select

COMPACT PDU WITH RACKLINK™

SPECIFICATIONS

Select Series Compact PDU with RackLink™ power management products shall be Middle Atlantic Products model # RLNK-215. Select Series Compact PDU with RackLink power products shall be 1.745"H x 4.77"W x 7.1"D (refer to drawing). Select Series Compact PDU with RackLink shall have a 15 amp power capacity. Select Series Compact PDU with RackLink shall provide MOV surge and spike protection. Select Series Compact PDU with RackLink shall provide 2 total outlets which shall be individually controllable. Select Series Compact PDU with RackLink shall provide sequencing. Select Series Compact PDU with RackLink shall include a 2' power cord. Select Series Compact PDU with RackLink shall monitor specific remote IP devices and services and shall automatically reboot an unresponsive network device and provide alerts via e-mail. Select Series Compact PDU with RackLink shall allow local export of log files in CSV format, and shall allow log files to be extracted to 3rd party databases via IP. Select Series Compact PDU with RackLink shall include an integrated web server for browser-based access and control. Select Series Compact PDU with RackLink shall utilize an open-architecture serial communications protocol that is cloud compliant without being cloud dependent, and provide an API for seamless integration into any IP based architecture. Select Series Compact PDUs with RackLink shall support HTTPS, SSH and Self-Signed Certificates. Select Series Compact PDU with RackLink shall be fully compliant with any control system or aggregator. Select Series Compact PDU with RackLink shall be constructed of aluminum and steel with a black powdercoat finish. Select Series Compact PDU with RackLink shall be manufactured by an ISO 9001 and ISO 14001 registered company. Select Series Compact PDU with RackLink shall be warrantied to be free from defects in materials and workmanship under normal use and conditions for a period of 3 years. Select Series Compact PDU with RackLink shall be listed to UL standard 62368-1 in US and to CAN/CSA C22.2 #62368-1 in Canada and FCC Part 15, Class B.



select

COMPACT PDU WITH RACKLINK™


SPECIFICATIONS

	RLNK-215	
SUMMARY	Form Factor	Compact
	Max Load	15A
	Rated Load	12A
	Surge Protection	Yes
	Sequencing	Yes
	# of Outlets	2 Total / 2 Controlled
	Integrated Web Server	Yes
AC POWER	Connection Type	2ft. IEC (15A)
	Line Voltage	Nominal: 120VAC / Minimum: 80VAC / Maximum: 140VAC
	Maximum Peak Load	15A
	Maximum Cont. Load	12A
	No Load Power Dissipation	Less than 1W (Note: Ethernet disconnected, all relays off)
BASIC SURGE SPECIFICATIONS	Peak Impulse Current (8/20uS Waveform)	12,000 Amps, one time, 9,000 Amps, two times within 5 minutes Maximum peak impulse current pulse as defined between line and neutral Maximum multiple impulse current derated per spec
	Protection Mode	Line to Neutral only; no ground contamination
	Response Time	Less than 1 nanosecond
	Surge Energy Dissipation	120 Joules (10 / 100 micro seconds)
	EMI/RF Suppression	>20dB Calculated Line to Neutral - 100kHz to 1Mhz - based on nominal impedance
	Safety	CE and UKCA and cETLus Listed to UL 62368-1 and CSA C22.2 No. 62368-1
	EMI/RF	FCC Part 15, Class B
EVENT DRIVEN/ RESPONSES	AutoPing	
	No Response/Recovery	Email and/or Control Outlet
GENERAL	Operating Temperature Range	32 - 104°F (0-40°C)
	Humidity Range	0-95% RH, non-condensing
	Communication	TCP/IP, HTTPS (Integrated web server)
	Warranty	3 Years Limited Warranty

select

COMPACT PDU WITH RACKLINK™

BASIC DIMENSIONS

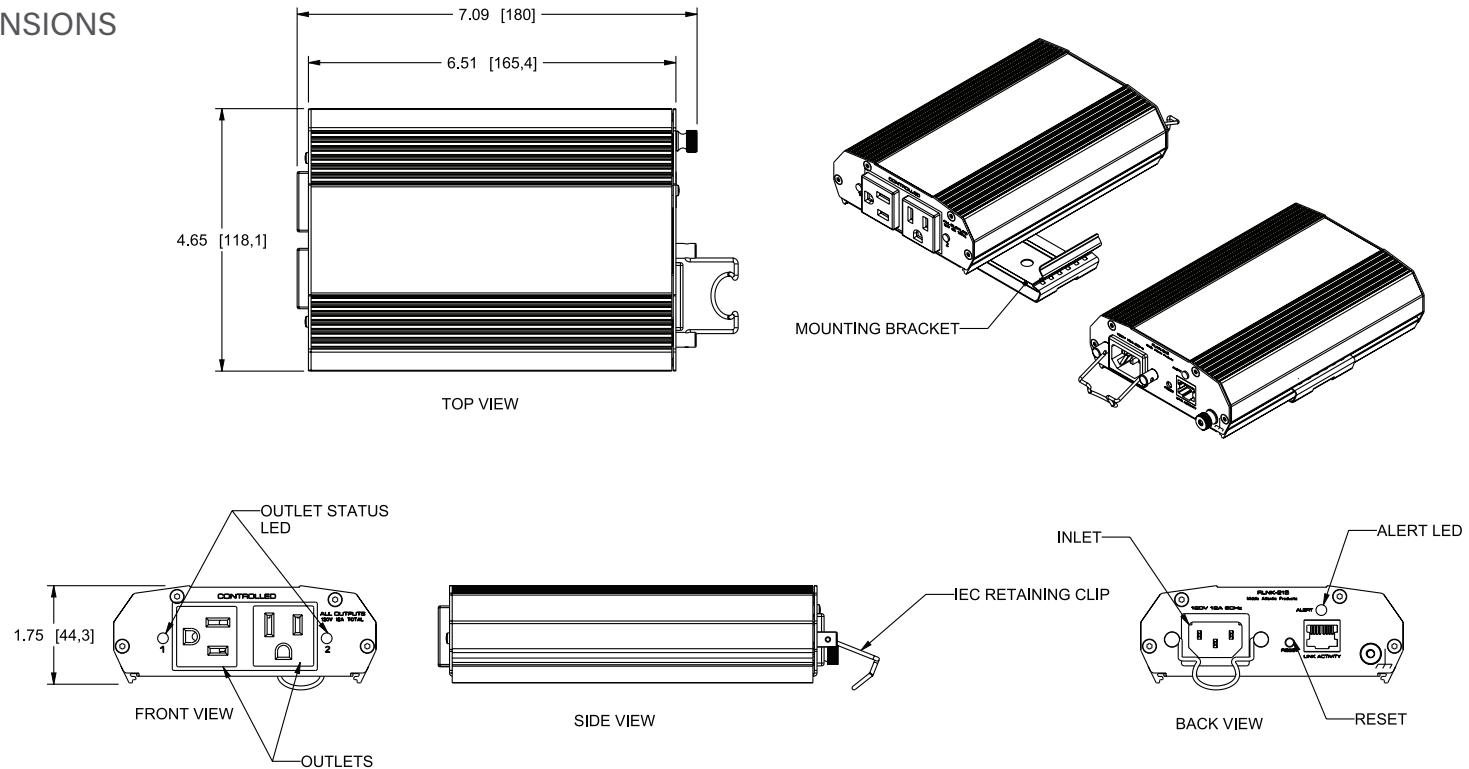

NOTE(S):
1) DIMENSIONS ARE IN THE FORMAT IN [MM]

LEGRAND | AV COMMERCIAL BRANDS
C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

WHAT GREAT SYSTEMS ARE BUILT ON™ | legrandav.com

USA 800.266.7225 av.middleatlantic.support@legrand.com CANADA 888.766.9770 av.middleatlantic.support@legrand.com

©2025 Legrand AV Inc. 230535 96_01239 Rev A 5/25 Middle Atlantic is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.