


ZINTRA STICKS

STICKS SUSPENSION KIT

INSTALLATION INSTRUCTIONS

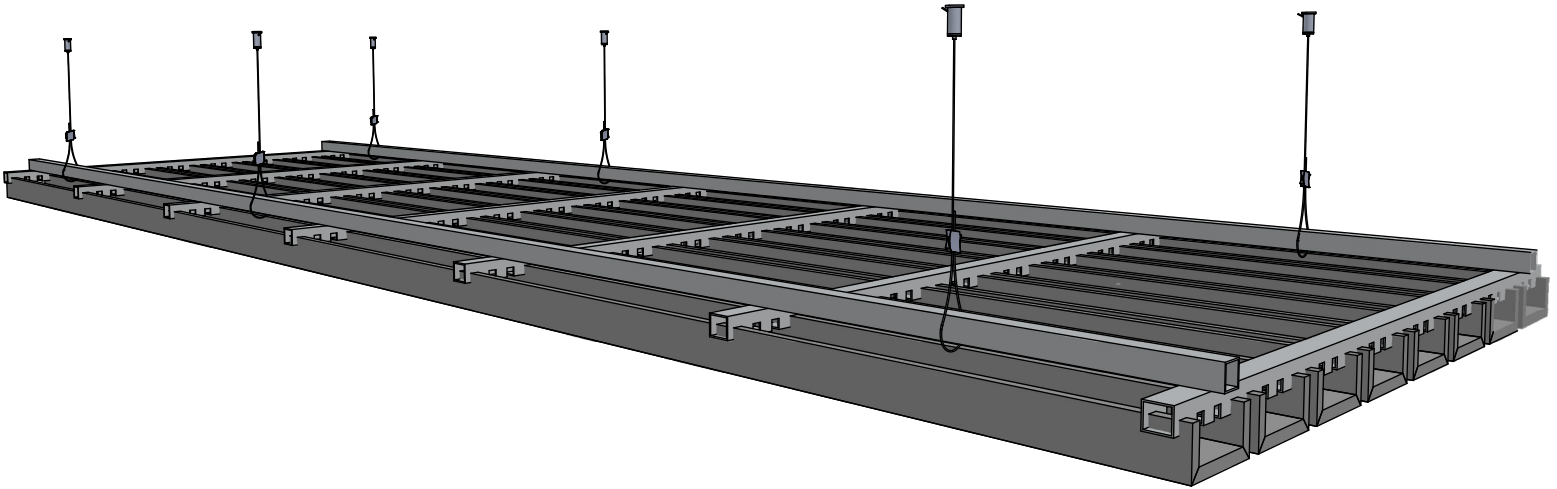

ZINTRA STICKS


STICKS SUSPENSION KIT

INSTALLATION INSTRUCTIONS


PARTS AND HARDWARE

FOR A TYPICAL ASSEMBLY


ZINTRA STICKS - (8) WIDE OR (16) NARROW

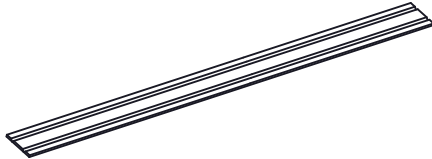

(2) STANDARD ALUMINIUM TUBE WITHOUT NOTCHES



(7) STANDARD ALUMINIUM TUBE WITH NOTCHES

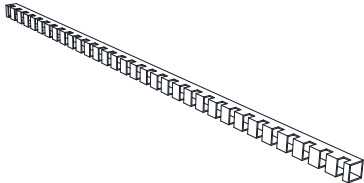


(6) 1/4" - 20 HANGER BOLT (FOR USE WITH WOOD SUBSTRATE ONLY)




(6) ADJUSTABLE FASTENER



(6) CABLE WITH SWAGE END, AND BARREL



(14) 90769A164 STEEL PHILLIPS ROUNDED HEAD DRILLING SCREW




ZINTRA STICKS

STICKS SUSPENSION KIT


INSTALLATION INSTRUCTIONS

YOU WILL NEED


SPIRIT LEVEL




DROP SAW WITH SUITABLE BLADE FOR ALUMINIUM CUTTING



DRILL



TAPE MEASURE



ZINTRA STICKS

STICKS SUSPENSION KIT


INSTALLATION INSTRUCTIONS

STEP 1



USE A LASER LEVEL OR SPIRIT LEVEL TO MARK ALUMINIUM POSITION ON THE STANDARD ALUMINIUM TUBE WITHOUT NOTCHES.

MAX DISTANCE FROM TUBE CENTRES IS 450mm [17.71"]

MAX DISTANCE BETWEEN END OF ALUMINIUM TUBE WITHOUT NOTCHES CENTRE AND ALUMINIUM TUBE WITH NOTCHES CENTRE IS 22.5mm [0.9"]

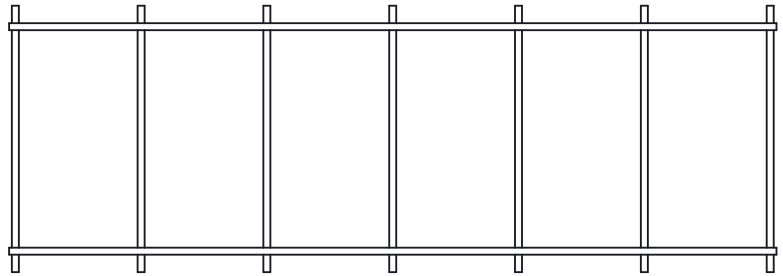

TOP VIEW

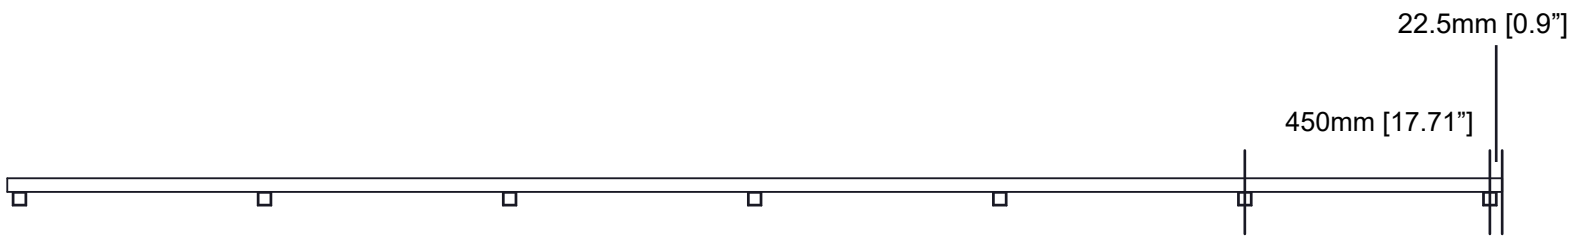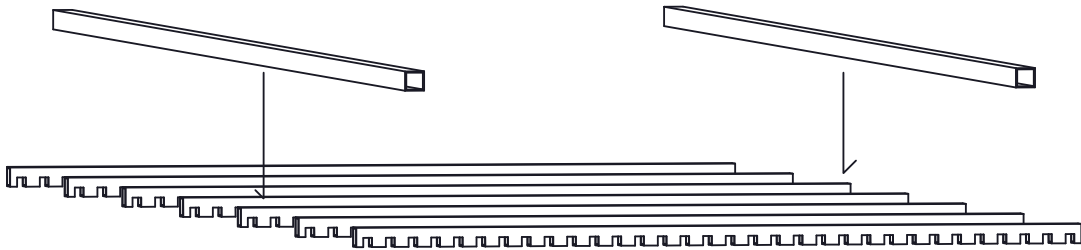

SIDE VIEW

ZINTRA STICKS

STICKS SUSPENSION KIT

INSTALLATION INSTRUCTIONS


STEP 2

MAX DISTANCE FROM CROSSRUNNERS CENTRE TO
EDGE OF ALUMINIUM TUBES WITHOUT NOTCHES IS
75mm [2.95"]




SCREW IN THE ALUMINIUM TUBES WITH NOTCHES
INTO THE CROSSRUNNERS (ALUMINIUM TUBE WITHOUT
NOTCHES)

75mm [2.95"]

75mm [2.95"]

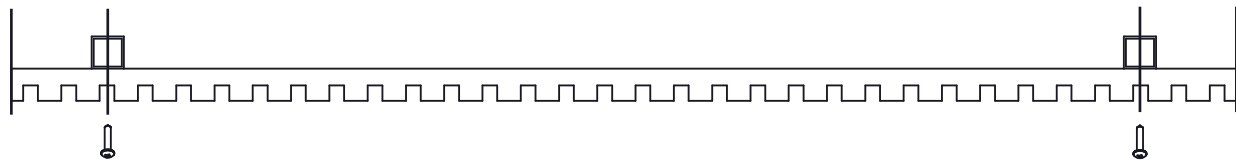

FRONT VIEW

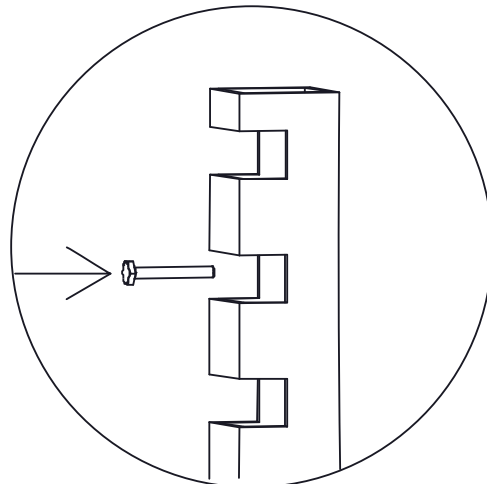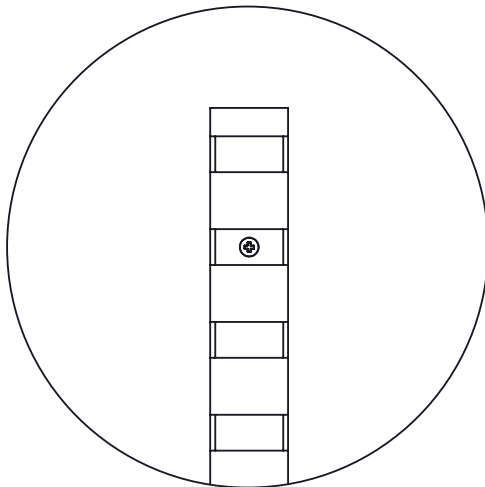



ZINTRA STICKS

STICKS SUSPENSION KIT

INSTALLATION INSTRUCTIONS

STEP 3

INSERT ZINTRA STICKS INTO NOTCHED ALUMINIUM TUBES AS SHOWN

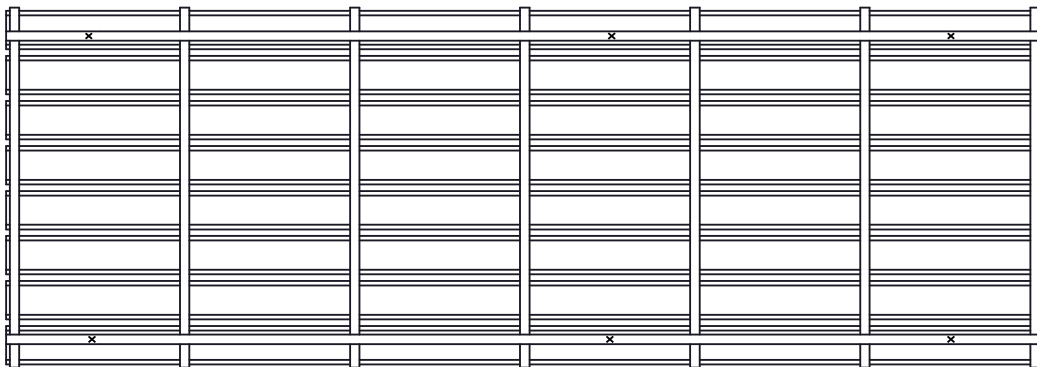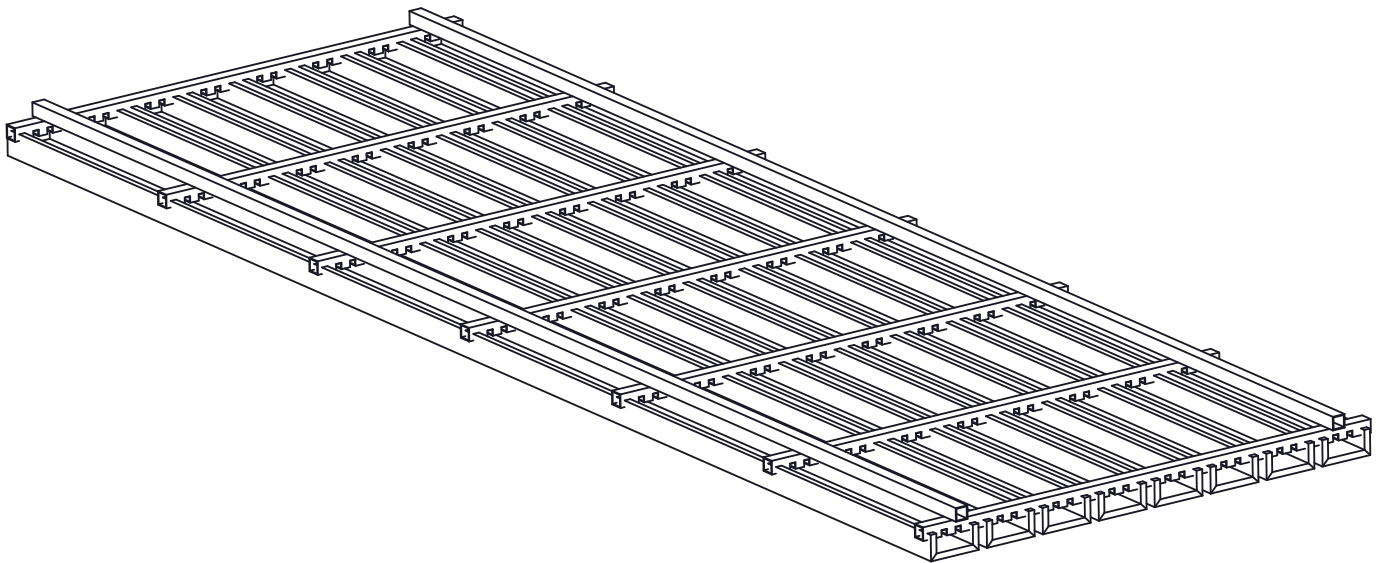

TOP VIEW


ZINTRA STICKS

STICKS SUSPENSION KIT

INSTALLATION INSTRUCTIONS

STEP 4

AFTER IDENTIFYING EACH CORRESPONDING POINT ON THE CEILING SUBSTRATE, TO THE POINTS MARKED ON STEP 3, DRILL AND ATTACH 1/4"-20 DOUBLE SIDED HANGER BOLT TO SUBSTRATE. REFERENCE DETAIL (SUPPLIED FOR WOOD ANCHORING ONLY). FOR ALL OTHER SUBSTRATES, STUDS/ ANCHORS MUST BE SOURCED BY THE INSTALLER.

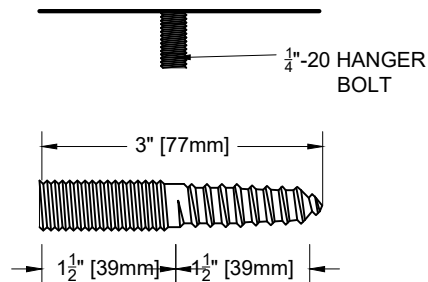


STEP 5

A. IDENTIFY THE THREADED END OF THE BARREL AND THE SWAGE END OF THE WIRE.

B. INSERT THE PLAIN END OF THE SUPPLIED WIRE THROUGH THE LARGE THREADED END OF THE BARREL UNTIL THE SWAGE END IS SEATED IN THE BARREL.

C. ATTACH THE THREADED END OF THE BARREL TO 1 / 4"-20 HANGER BOLT.

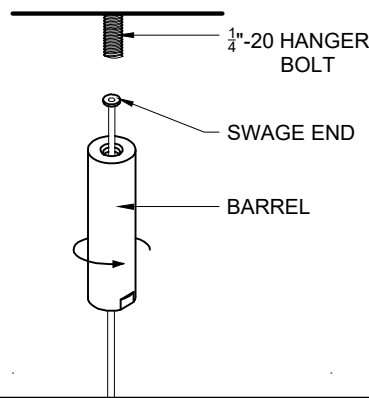


STEP 6

A. INSERT THE PLAIN END OF THE SUPPLIED WIRE THROUGH ONE SIDE OF THE ADJUSTABLE FASTENERS.

B. LOOP THE WIRE AROUND THE CROSSRUNNER WHERE MARKED.



C. RE-INSERT THE PLAIN END OF THE WIRE INTO THE REMAINING SIDE OF THE ADJUSTABLE FASTENER UNTIL SECURE.

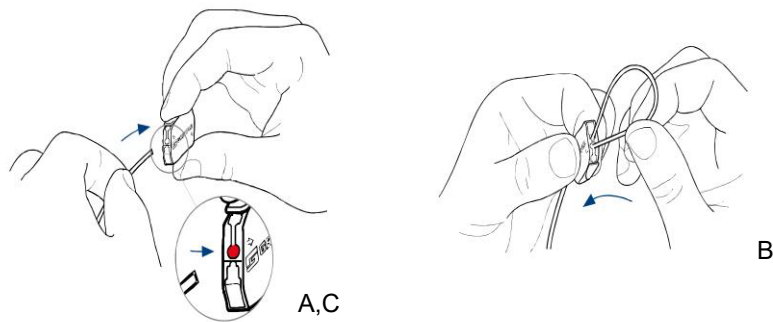

STEP 7

ONCE THE HANGING KIT IS PROPERLY SUSPENDED, TRIM THE EXCESS WIRE (IF NECESSARY) WITH WIRE CUTTERS.

NOTE: WIRE IS INFINITELY ADJUSTABLE BY DEPRESSING TAB ON APPROPRIATE SIDE.

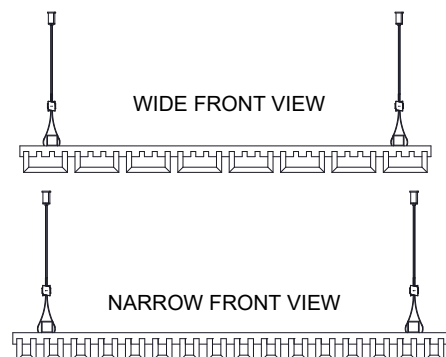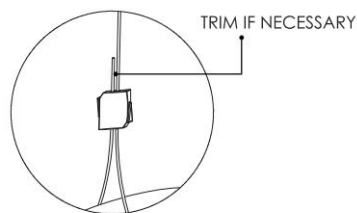

ZINTRA STICKS

STICKS SUSPENSION KIT

INSTALLATION INSTRUCTIONS

FINISHED INSTALL

