


66350 Manor



66351 Quarry

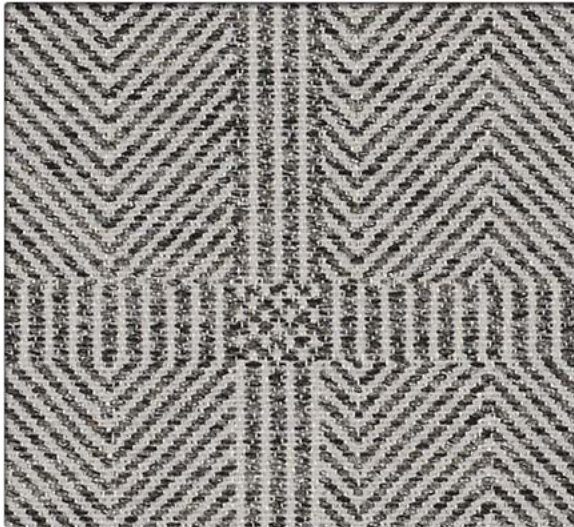

66352 Graystone



66356 York



66354 Prairie



66355 Regatta



66353 Brownstone

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Bleach-solution cleanable

Environmental

- GREENGUARD Gold Certified
- LBC Red List Free
- REACH Compliant
- Non PFOA Stain Resistance
- No added flame retardants
- No added antimicrobials

Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

Specifications

Content	74% Olefin, 26% Polyester
Finish	Non-PFOA / Non-PFAS Water-Based Stain Resistant
Backing	Acrylic
Weight	16.32 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Repeat	Horizontal: 14.0 inches, Vertical: 9.5 inches, directional
Roll Size	50 yards
	Made in the USA



Performance Characteristics

Abrasion Resistance ASTM D-4157	Exceeds 75,000 double rubs - heavy duty
Break Strength ASTM D-5034	Warp: 181 lbs. min., Fill: 339 lbs. min.
Tear Strength ASTM D-2261	Warp: 16 lbs. min., Fill: 39 lbs. min.
Seam Slippage ASTM D-4034	Warp: 102 lbs. min., Fill: 93 lbs. min.
Brush Pilling ASTM D-3511	Class 4.0 min.
Colorfastness to Light AATCC-16	40 Hours, Class 4.0
Crocking AATCC-8	Dry: Class 4.0, Wet: Class 3.0

Flammability*

California Technical Bulletin 117-2013 Section 1	Passed
NFPA 260	Class 1
UFAC	Class 1



Stinson®

C.F. Stinson, LLC
2849 Product Drive
Rochester Hills, MI 48309

P 800 841 6279
F 248 299 3884

cfstinson.com