






ALM10 Nomad

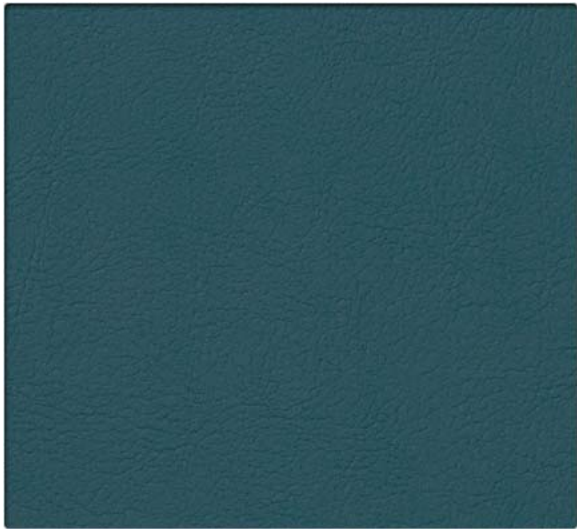

ALM35 Deep Teal

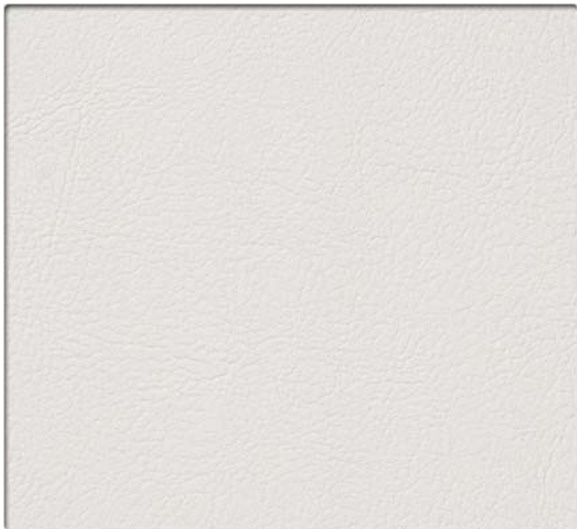

ALM12 Tinsel

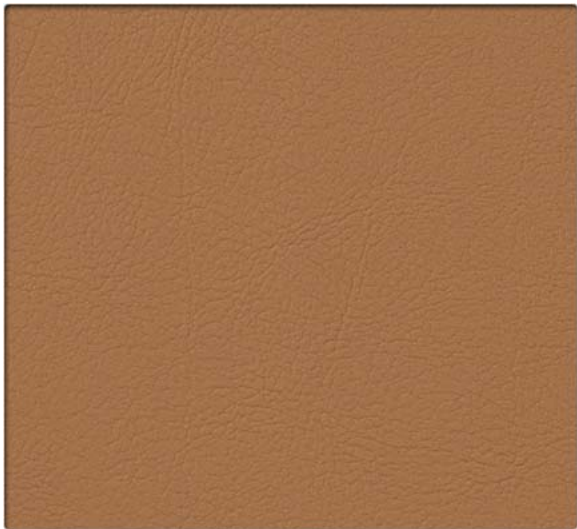


ALM13 Acorn



ALM14 Marlin



ALM15 Putty

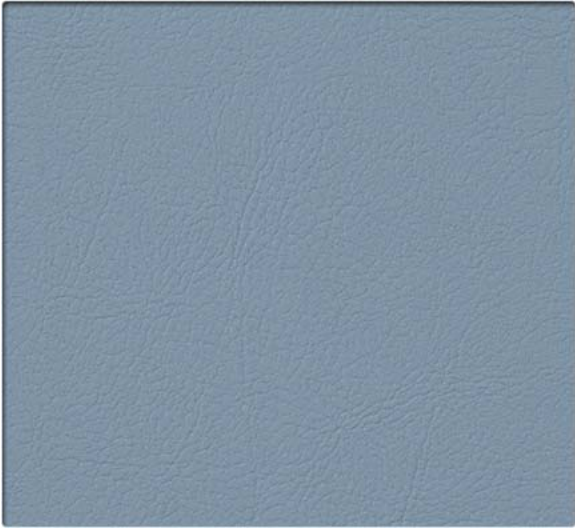

ALM16 Blue Moon



ALM17 Clay



ALM18 Spur



ALM19 Morel



ALM20 Skye



ALM21 Lemongrass




ALM22 Sienna




ALM23 Mulberry



ALM24 Cliff

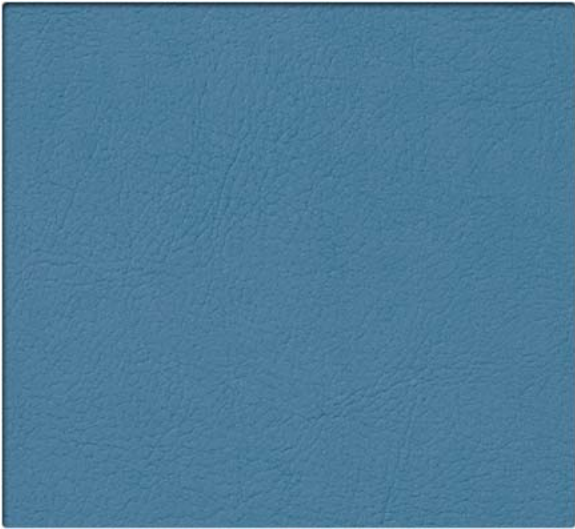

ALM25 Neptune

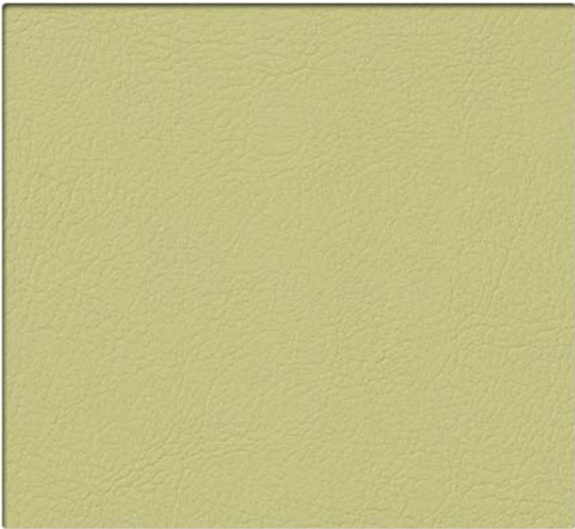

ALM26 Spring




ALM27 Lounge



ALM28 Branch



ALM29 Nori

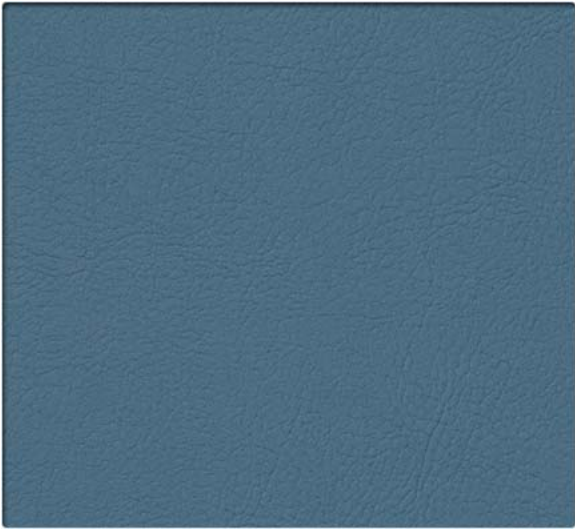

ALM30 Wave



ALM31 Meadow




ALM32 Java



ALM33 Crow



ALM34 Navy

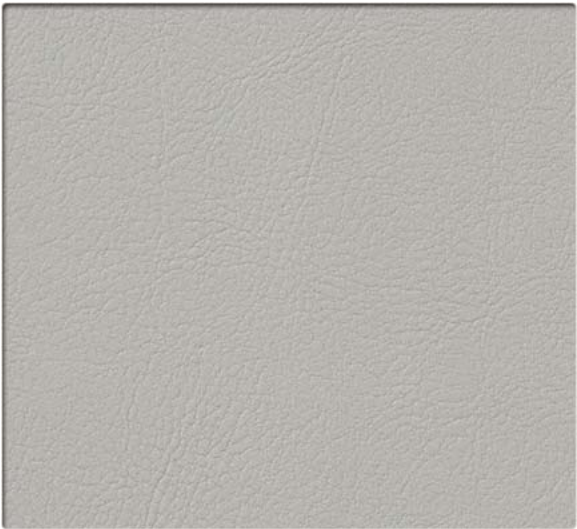

ALM11 Gate

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- CFFA-Healthcare-201: Certified
- Denim stain resistant
- Fluid barrier
- Bleach-solution cleanable
- Enhanced fade resistance

Environmental

- GREENGUARD Certified
- REACH Compliant
- RoHS Compliant
- No PFAS, fluorocarbons or perfluorinated compounds
- No added flame retardants
- No added antimicrobials
- Does not contain formaldehyde
- Formulated without Phthalates

Cleaning and Maintenance

Cleaning Code: **(W)** Clean with water-based foam or water-based cleaners only. Do not use solvents. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Specifications



| | |
|-----------|--|
| Content | Non-Phthalate Vinyl Surface with Polyester Backing |
| Finish | Advanced Soil and Stain Resistant Top Coat |
| Weight | 806 g/lin. m \pm 28 g |
| Width | 137.2 cm |
| Roll Size | 27.4 m |

Performance Characteristics

| | |
|-------------------------------|--|
| Abrasion Resistance** CFFA-1 | Exceeds 100,000 double rubs - heavy duty |
| Adhesion CFFA-3 | Warp: 1.5 kg min, Fill: 1.5 kg min |
| Break Strength CFFA-17 | Warp: 54.9 kg min, Fill: 32.7 kg min |
| Tear Strength ASTM D-751-06 | Warp: 2.5 kg min, Fill: 2.7 kg min |
| Seam Slippage ASTM D-751-06 | Warp: 20.9 kg min, Fill: 15.9 kg min |
| Colorfastness to Light CFFA-2 | 1000 Hours, Class 4.5 |
| Crocking CFFA-7 | Dry: Class 4.0, Wet: Class 4.0 |
| Fluid Barrier | Inherent Fluid Barrier |

Flammability*

| | |
|--|---------|
| California Technical Bulletin 117-2013 Section 1 | Passed |
| UFAC | Class 1 |
| NFPA 260 | Class 1 |



This product is formulated without phthalates.



Stinson®

C.F. Stinson, LLC
2849 Product Drive
Rochester Hills, MI 48309

P 800 841 6279
F 248 299 3884

cfstinson.com