


# Lara

LRA67 Tamale

VINYL SEATING

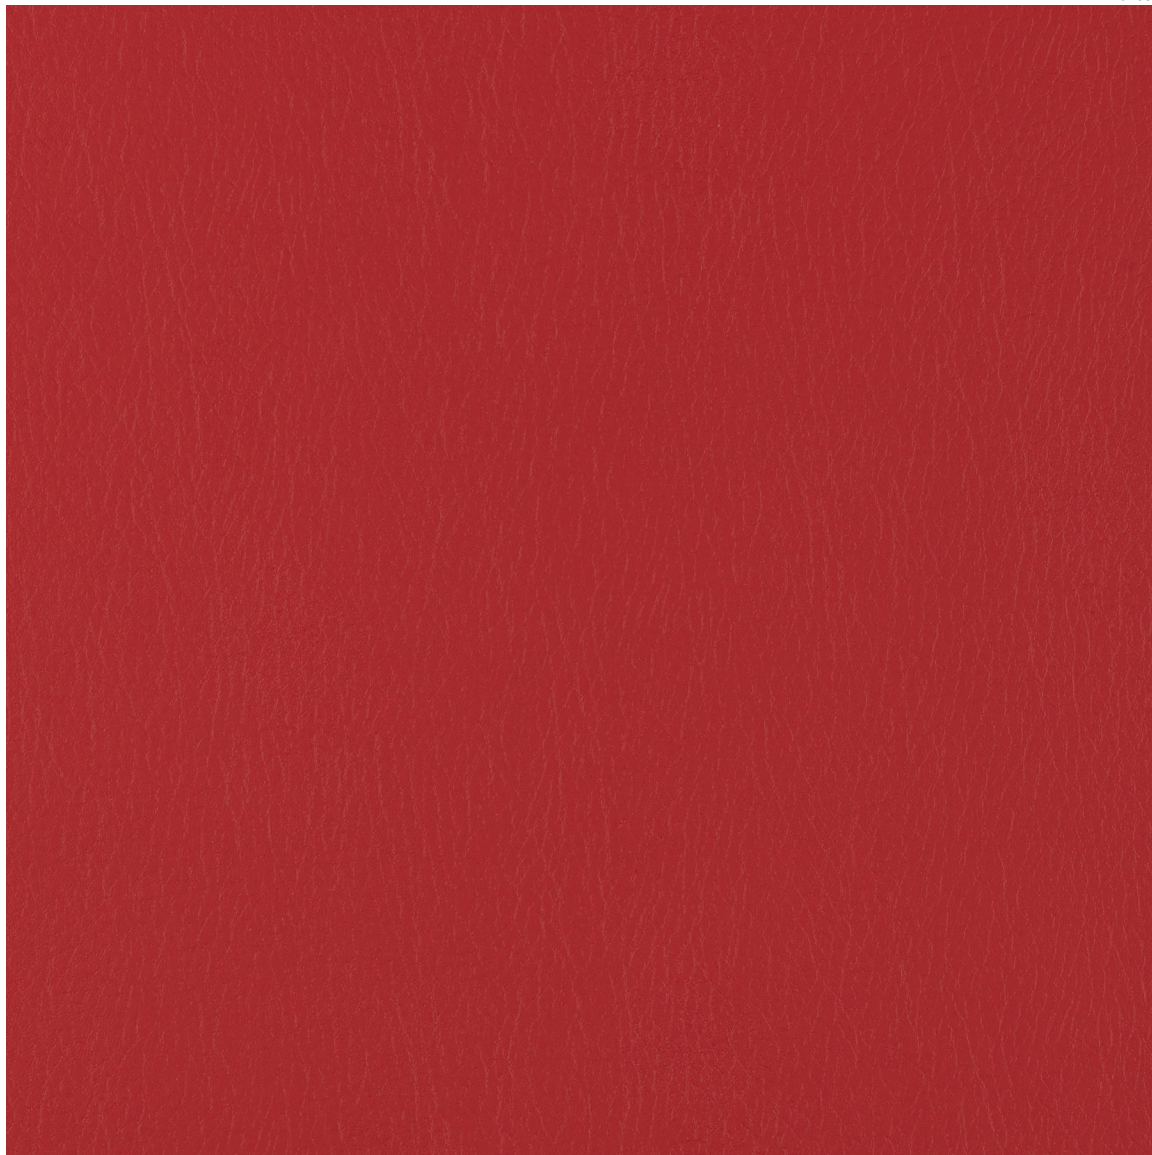

## Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- CFFA-Healthcare-201: Certified
- Denim stain resistant
- Fluid barrier
- Bleach-solution cleanable
- Enhanced fade resistance

## Environmental

- GREENGUARD Certified
- REACH Compliant
- RoHS Compliant
- No PFAS, fluorocarbons or perfluorinated compounds
- No added flame retardants
- No added antimicrobials
- Formulated without Phthalates

## Cleaning and Maintenance

Cleaning Code: **(W)** Clean with water-based foam or water-based cleaners only. Do not use solvents. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

Dye lots may vary slightly.

\* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

\*\* Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

## Specifications



Content	Non-Phthalate Vinyl Surface with Polyester Backing
Finish	Advanced Soil and Stain Resistant Top Coat
Backing	Polyester Fabric
Weight	28.0 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Roll Size	40 yards

## Performance Characteristics

Abrasion Resistance** ASTM D-4157	Exceeds 1,300,000 double rubs - heavy duty
Adhesion CFFA-3	Warp: 4.0 lbs. min., Fill: 4.0 lbs. min.
Break Strength CFFA-17	Warp: 85 lbs. min., Fill: 75 lbs. min.
Tear Strength CFFA-16	Warp: 20 lbs. min., Fill: 27 lbs. min.
Seam Slippage CFFA-14	Warp: 35 lbs. min., Fill: 30 lbs. min.
Colorfastness to Light CFFA-2	650 Hours, Class 4.0
Fluid Barrier	Inherent Fluid Barrier

## Flammability\*

California Technical Bulletin 117-2013 Section 1	Passed
UFAC	Class 1
NFPA 260	Class 1
BIFMA	Class 1



This product is formulated without phthalates.



# Stinson®

C.F. Stinson, LLC  
2849 Product Drive  
Rochester Hills, MI 48309

P 800 841 6279  
F 248 299 3884

cfstinson.com