



ASSEMBLY GUIDE



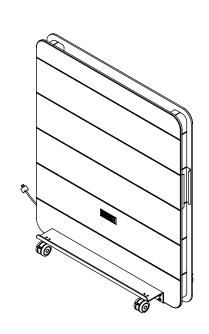


x1 Cooee Three Quarter Wall
With Power

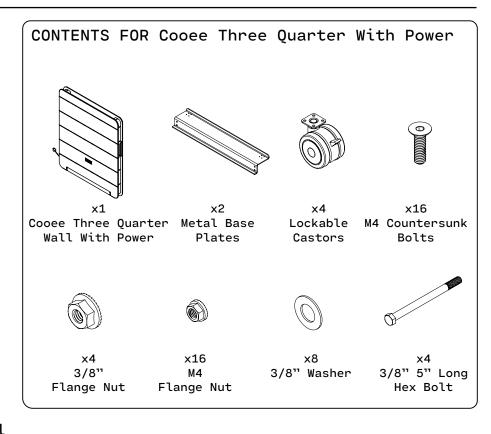


CAUTION



- Clear open space for install
- May need need a sturdy table.
- + 50lbs lift required

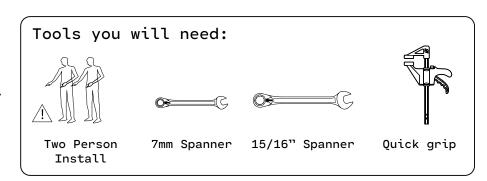

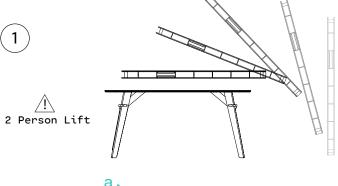

Lay Cooee Wall on table.



b.
Hang bottom end off the table
to allow for base assembly.





COOEE THREE **QUARTER WALL** WITH POWER

ASSEMBLY GUIDE












Lay metal bases on Cooee Wall.

Clamp with quick grip. Ensure Holes are aligned.







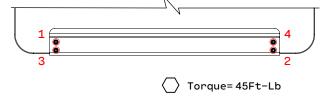

Insert 3/8 bolt, Washer and Flange Nut. Ensure all bolts are in the same direction

b. Clamp with quick grip. Tighten bolts in order and repeat to prevent one bolt tighter than the other. Ensure Hole's are aligned.






Insert countersunk bolts, castors and M4 Flange nuts then tighten with 7mm Spanner. Repeat for all bolts

Ensure all bolts and castor's are secure

PAGE 2




ASSEMBLY GUIDE

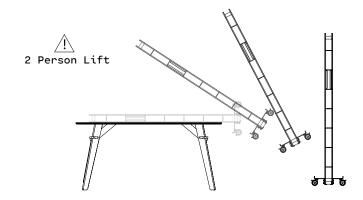

a. Lift Cooee Wall onto the ground.



b. Stand up and ensure Cooee Wall is able to move and castors can be locked.

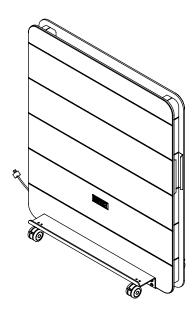

x1 Assembled
Cooee Three Quarter Wall With



CAUTION & WARNING STATEMENT.

- Ensure wheels are locked and stationary when attaching Accessories.
- Cooee Wall With Power has internal wiring and live power when plugged in.
- Do not screw or drill anywhere unless stated on the Func Assembly guide.
- Escape routes must no be blocked.

- Disconnect Power when moving.
- Move slow, especially when crossing door thresholds etc.
- Ensure all cables have no loops and are out of foot traffic. (No trip hazards)
- Do not load heavy accessories on one side of the wall, as it increase the chance of tipping.