


Premier

66561 Mirage

PERFORMANCE FABRIC

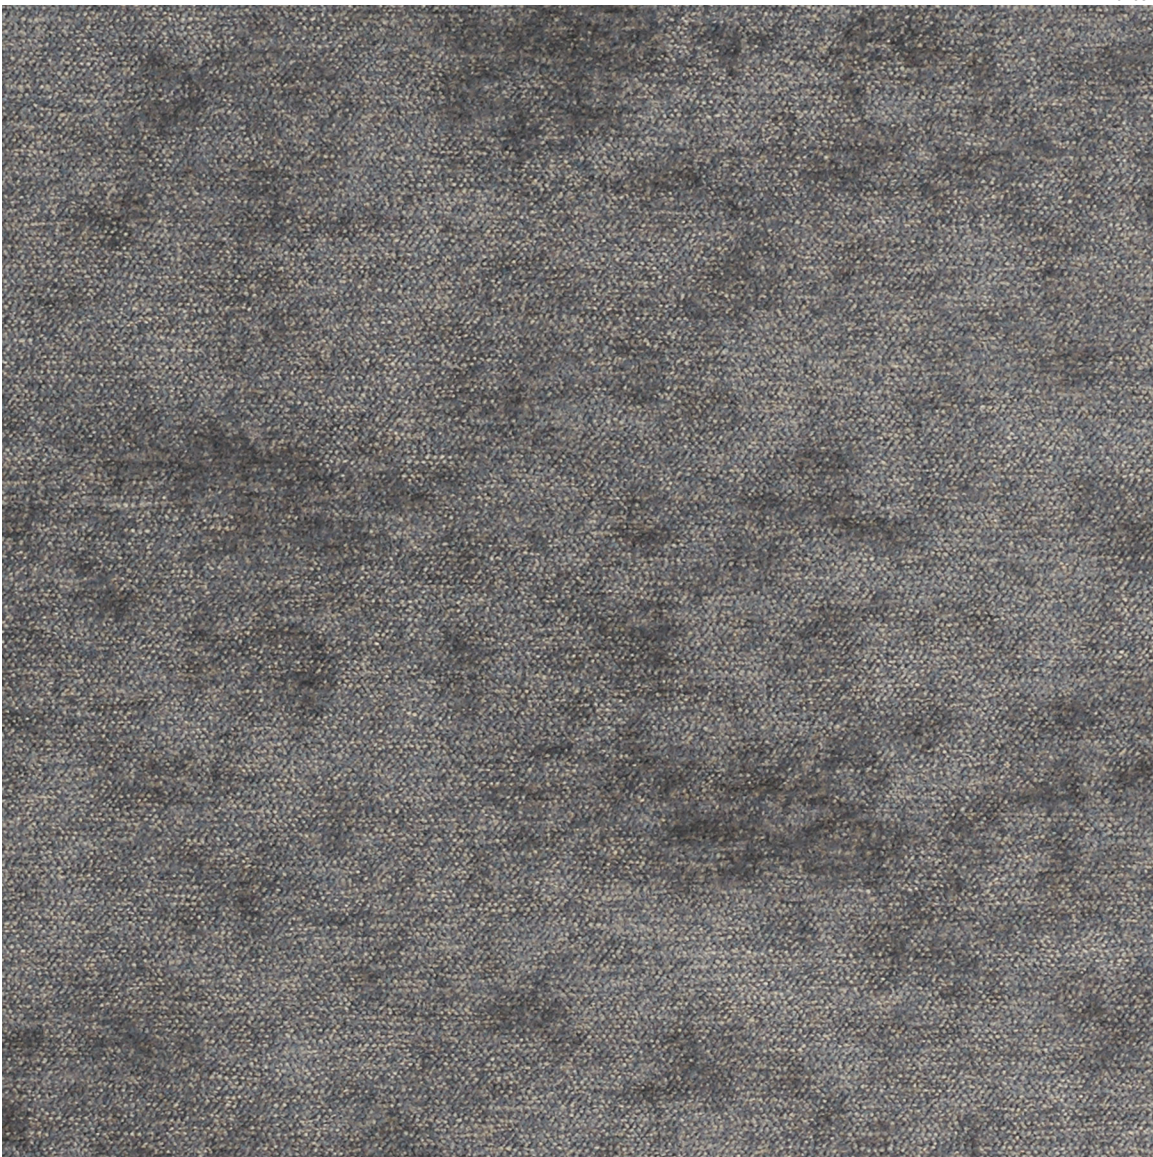

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Water-based stain protection
- Fluid barrier
- Contains an antimicrobial agent

Environmental

- GREENGUARD Gold Certified
- LBC Red List Free
- REACH Compliant
- RoHS Compliant
- No PFAS, fluorocarbons or perfluorinated compounds
- No added flame retardants

Cleaning and Maintenance

Cleaning Code: **(W)** Clean with water-based foam or water-based cleaners only. Do not use solvents. We recommend using a professional cleaning service.

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

Specifications



Content	69% Polyester, 31% Acrylic
Finish	Crypton® Non-PFOA / Non-PFAS / Water-Based Stain Resistant
Backing	Crypton® Integrated Fluid Barrier
Weight	19.43 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Roll Size	50 yards

Performance Characteristics

Abrasion Resistance ASTM D-4157	Exceeds 70,000 double rubs - heavy duty
Break Strength ASTM D-5034	Warp: 89.1 lbs. min., Fill: 113.1 lbs. min.
Tear Strength ASTM D-2261	Warp: 12.5 lbs. min., Fill: 13.7 lbs. min.
Seam Slippage ASTM D-4034	Warp: 84.9 lbs. min., Fill: 93.8 lbs. min.
Brush Pilling ASTM D-3511	Class 3.5 min.
Colorfastness to Light AATCC-16	40 Hours, Class 4.0
Crocking AATCC-8	Dry: Class 4.0, Wet: Class 4.0
Fluid Barrier	Crypton® Integrated Fluid Barrier
Antimicrobial	Crypton® fabric protection features silver ion technology which inhibits the growth of microbes on the protected surface.

Flammability*

California Technical Bulletin 117-2013 Section 1	Passed
NFPA 260	Class 1
UFAC	Class 1



Stinson®

C.F. Stinson, LLC
2849 Product Drive
Rochester Hills, MI 48309

P 800 841 6279
F 248 299 3884

cfstinson.com