



# ZINTRA BAFFLES

## WAVE

### INSTALLATION INSTRUCTIONS

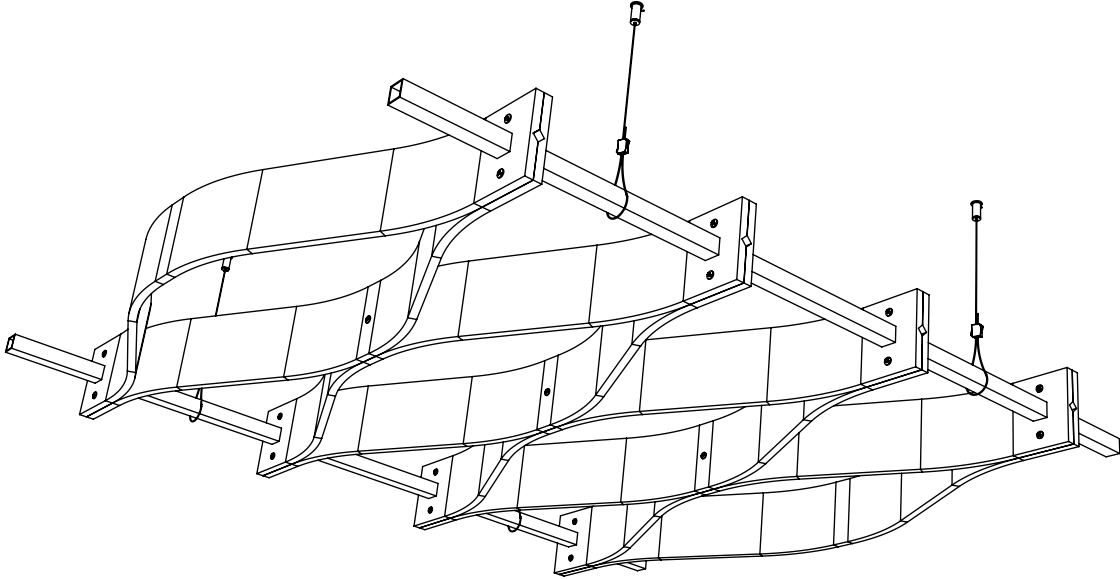

PERSPECTIVE - 54.0" x 48.03" x 0.5"

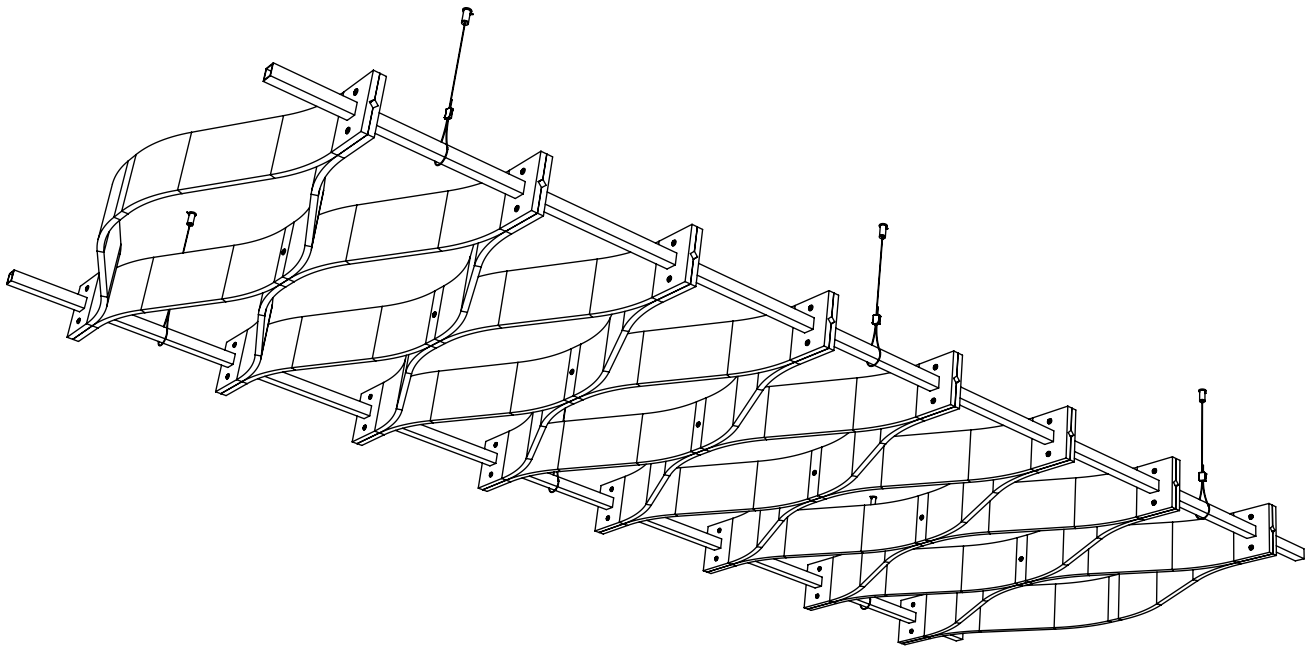

PERSPECTIVE - 108.07" x 48.03" x 0.5"

# ZINTRA BAFFLES

## WAVE

### INSTALLATION INSTRUCTIONS

#### PARTS AND HARDWARE

(4 - 48" LONG, 6 - 108" LONG) CABLE WITH SWAGE END, AND BARREL



(4 - 48" LONG, 6 - 108" LONG) 1/4" - 20 HANGER BOLT (FOR USE WITH WOOD SUBSTRATE ONLY)




(4 - 48" LONG, 6 - 108" LONG) ADJUSTABLE FASTENER




(4 - 48" LONG, 6 - 108" LONG) END CAP



(2 - 48" LONG, 3 - 108" LONG) CROSSRUNNER WITHOUT NOTCHES




(8 - 54" LONG, 16 - 108" LONG) ZINTRA BLADES (48" TYPICAL SHOWN)




(4 - 54" LONG, 8 - 108" LONG) WAVE CONNECTOR - IF CONNECTING MORE THAN 1 BAFFLE ASSEMBLY



(19 - 54" LONG, 39 - 108" LONG) BINDING BARREL



(2 - 54" LONG, 2 - 108" LONG) TUBE CONNECTOR - IF CONNECTING MORE THAN 1 BAFFLE ASSEMBLY




# ZINTRA BAFFLES

## WAVE


### INSTALLATION INSTRUCTIONS

## YOU WILL NEED


SPIRIT LEVEL



DRILL



TAPE MEASURE



# ZINTRA BAFFLES

## WAVE

### INSTALLATION INSTRUCTIONS


#### STEP 1

CHECK TO SEE IF PACKAGE CONTAINS ALL COMPONENTS.

54" - 8 BLADES  
108" - 16 BLADES


54.0" x 48.03" x 0.5"

(A)

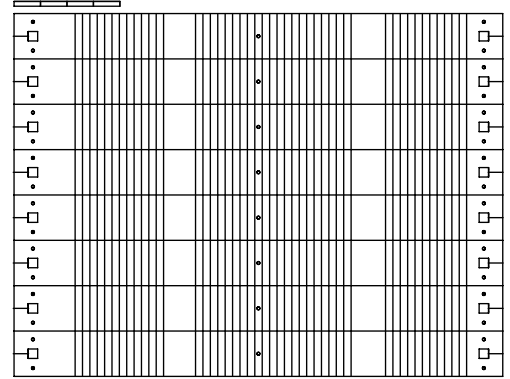

108.07" x 48.03" x 0.5"




(B)

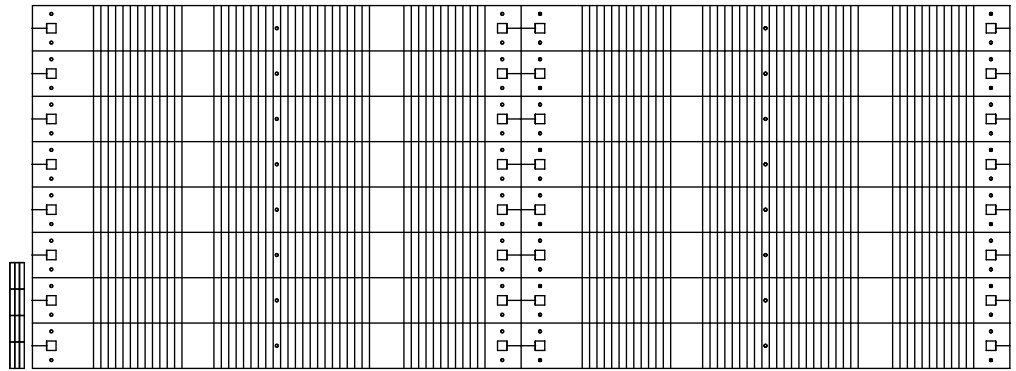


#### STEP 2

SECURE THE WAVE BAFFLE VIA THE BINDING BARREL SHOWN IN THE SIDE PROFILE BELOW.

ENSURE THE V-CUTS ARE FACING TOWARDS THE INSIDE BY DOUBLE CHECKING THE SIDE PROFILE (SHOULD MAKE DIAMOND SHAPE).

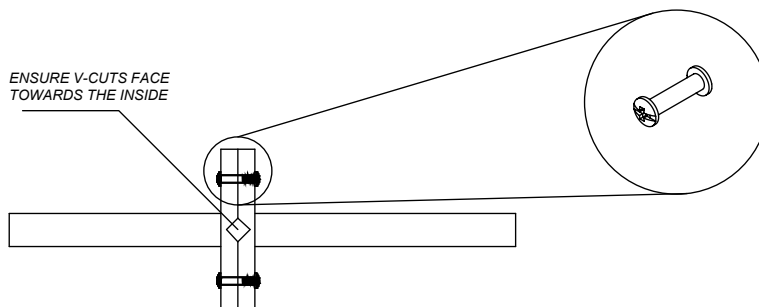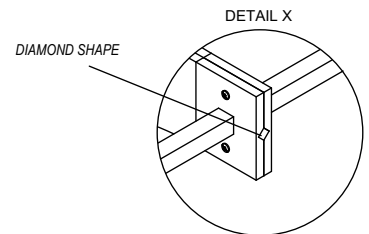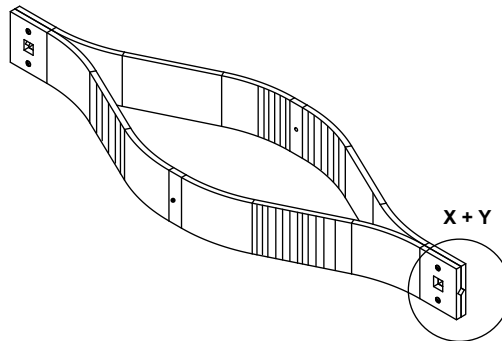

LOCATION HOLES FOR BINDING SCREWS




# ZINTRA BAFFLES

## WAVE

### INSTALLATION INSTRUCTIONS

#### STEP 3


SLIDE ASSEMBLED BAFFLES ONTO THE CROSS RUNNERS WITH "X" DISTANCE BETWEEN EACH. 54" VERSION WILL HAVE (4) BAFFLES PER SET. 108" VERSION WILL HAVE (8) BAFFLES PER SET.

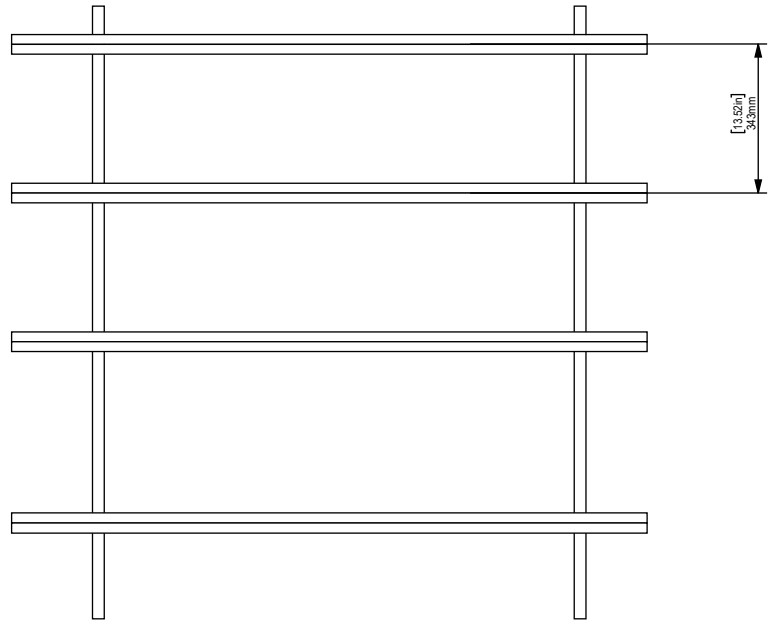



#### STEP 4

SPREAD BAFFLE ASSEMBLIES APART AND JOIN TO EACH OTHER WITH SUPPLIED BINDING BARREL THROUGH THE CENTRE HOLE.

NOTE: CENTRE HOLE WILL NOT COME PUSHED OUT, ONLY PUSH OUT HOLES THAT ARE REQUIRED FOR FIXING.

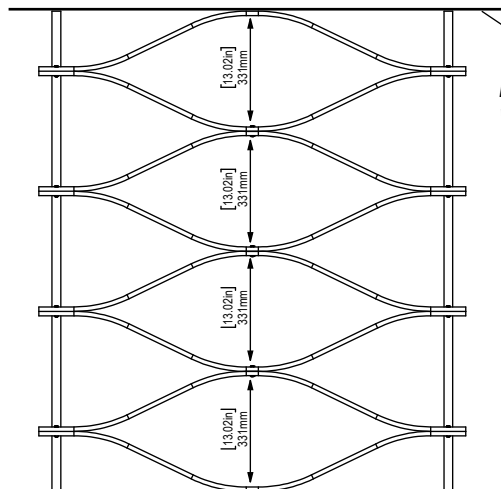

KEEP EDGE FLUSH WITH BAFFLE

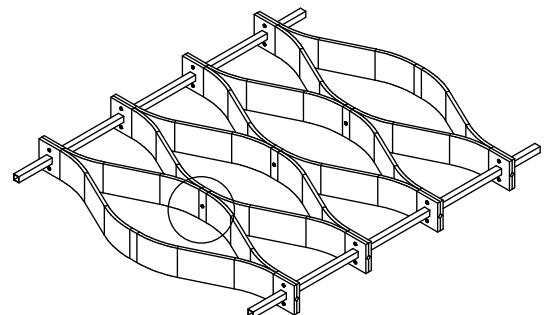

# ZINTRA BAFFLES

## WAVE

### INSTALLATION INSTRUCTIONS




(A) 54.0" x 48.03" x 0.5"

(B) 108.07" x 48.03" x 0.5"

#### STEP 5


FIND THE LOCATIONS OF THE A.S.K'S IT WILL BE THE MIDPOINT BETWEEN THE FIRST BAFFLE AND SECOND BAFFLE ASSEMBLED (MARKED X ON DETAIL) FOR BOTH THE BACK AND FRONT.

THERE WILL BE 2 LOCATIONS PER CROSSRUNNER (TOTAL OF 4 ON (A) AND TOTAL OF 6 ON (B)).

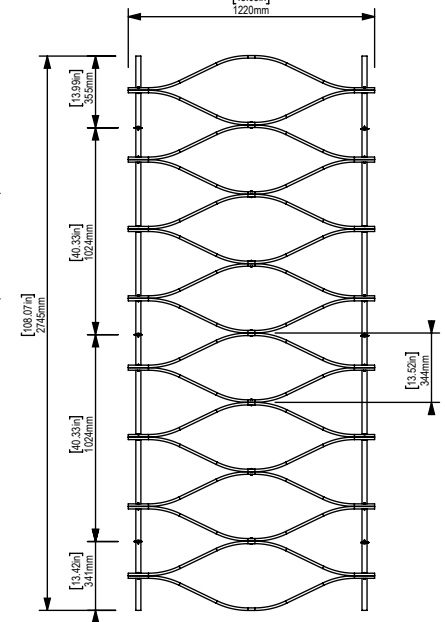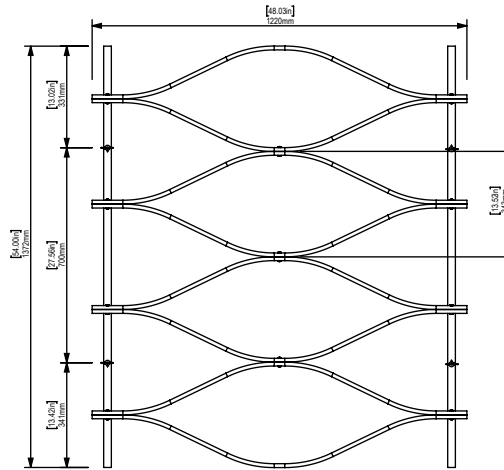

#### STEP 6

AFTER IDENTIFYING EACH CORRESPONDING POINT ON THE CEILING SUBSTRATE, TO THE POINTS MARKED ON STEP 7, DRILL AND ATTACH 1/4"-20 DOUBLE SIDED HANGER BOLT TO SUBSTRATE. REFERENCE DETAIL (SUPPLIED FOR WOOD ANCHORING ONLY). FOR ALL OTHER SUBSTRATES, STUDS/ ANCHORS MUST BE SOURCED BY THE INSTALLER.

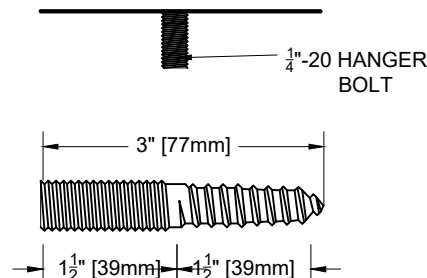


#### STEP 7

A. IDENTIFY THE THREADED END OF THE BARREL AND THE SWAGE END OF THE WIRE.

B. INSERT THE PLAIN END OF THE SUPPLIED WIRE THROUGH THE LARGE THREADED END OF THE BARREL UNTIL THE SWAGE END IS SEATED IN THE BARREL.

C. ATTACH THE THREADED END OF THE BARREL TO 1 / 4"-20

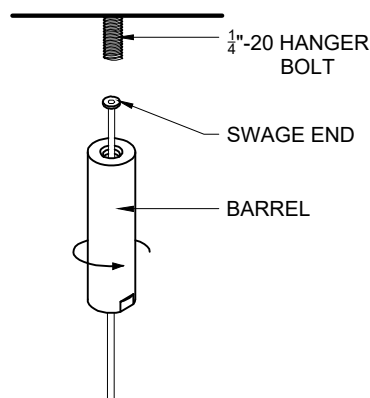

# ZINTRA BAFFLES

## WAVE


### INSTALLATION INSTRUCTIONS

#### STEP 8

A. INSERT THE PLAIN END OF THE SUPPLIED WIRE THROUGH ONE SIDE OF THE ADJUSTABLE FASTENERS.

B. LOOP THE WIRE AROUND THE CROSSRUNNER WHERE MARKED.


C. RE-INSERT THE PLAIN END OF THE WIRE INTO THE REMAINING SIDE OF THE ADJUSTABLE FASTENER UNTIL SECURE.

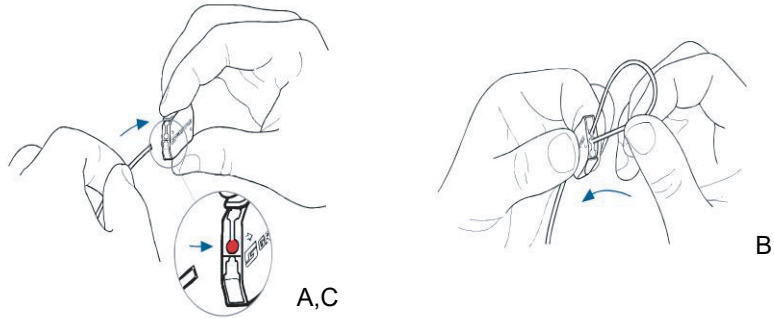

#### STEP 9


ONCE THE BAFFLE IS PROPERLY SUSPENDED, TRIM THE EXCESS WIRE (IF NECESSARY) WITH WIRE CUTTERS.

**NOTE: WIRE IS INFINITELY ADJUSTABLE BY DEPRESSING TAB ON APPROPRIATE SIDE.**

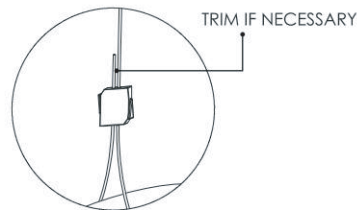


#### STEP 10

A. CAP THE END OF THE SUSPENSION RODS BY PRESSING THE SUPPLIED PVC CAPS UNTIL SECURE.

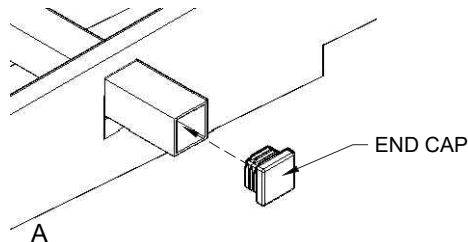

B. TO CONNECT MULTIPLE BAFFLE SYSTEMS TOGETHER USE THE SUPPLIED ZINTRA CONNECTORS. INSERT ONE OF THEM HALF WAY INTO THE CROSSRUNNER, AND THE OTHER HALF INTO THE ADJACENT CROSSRUNNER. ADJUST AS NEEDED FOR ALIGNMENT.

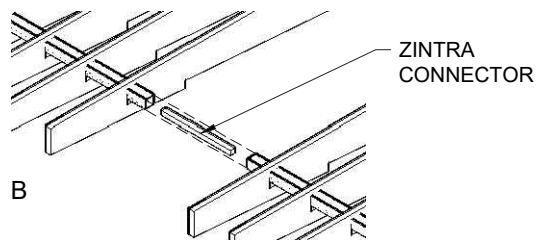

# ZINTRA BAFFLES


## WAVE

### INSTALLATION INSTRUCTIONS

C. CONNECT THE WAVE ASSEMBLIES USING THE WAVE CONNECTORS.


THIS WILL BE INSERTED INSIDE THE SIDE AS SHOWN IN SEQUENCE 1-3

NOTE: EACH WAVE BAFFLE ASSEMBLY WILL NEED 1 WAVE CONNECTOR BETWEEN EACH OTHER.




WAVE CONNECTOR


DETAIL Z

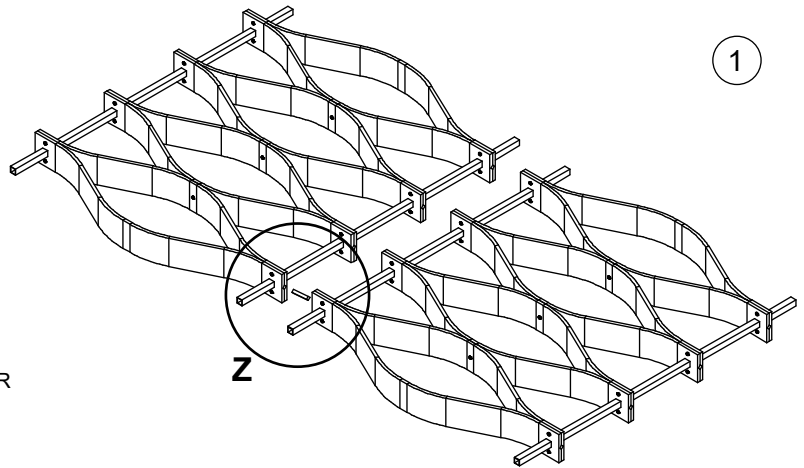

1

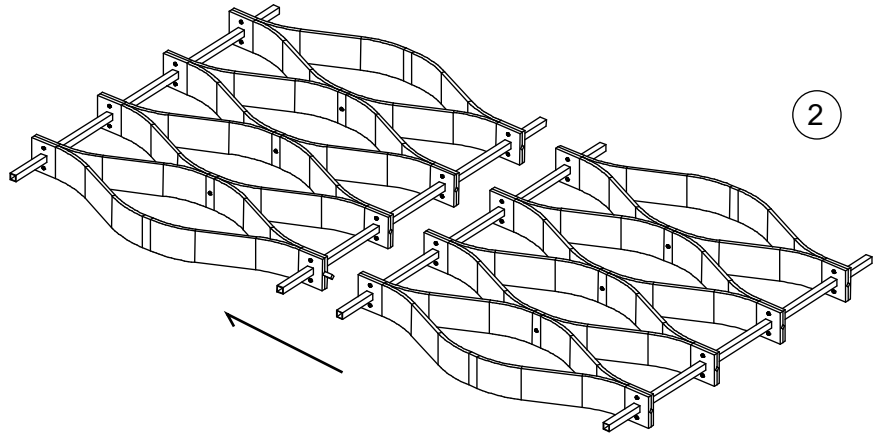


2

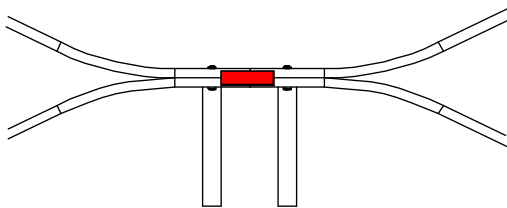

TOP PROFILE

WAVE CONNECTOR SHOW IN RED

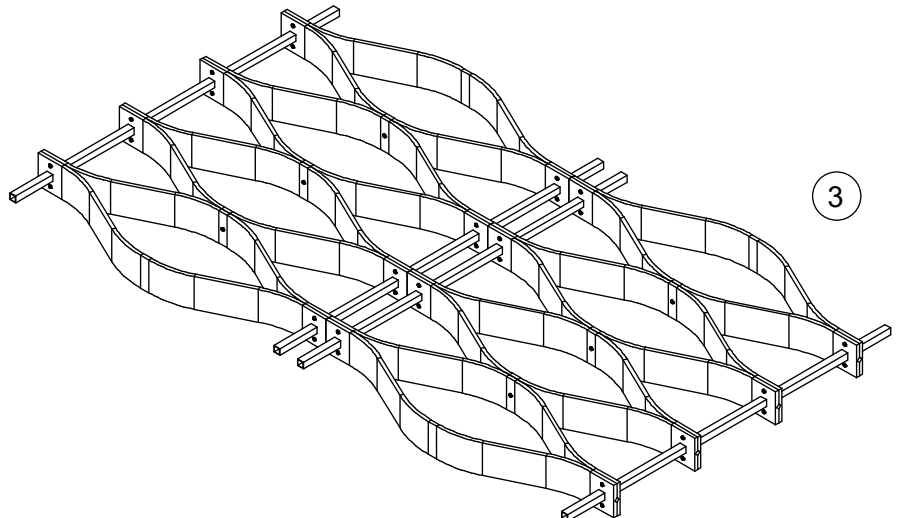

3